

BEFORE YOU START:

- Please check local electrical codes before beginning
- Turn power off before installing
- Make sure to use properly rated wire

GEOTASK CAN BE MOUNTED ON ANY SURFACE WHERE A JUNCTION BOX OR PANCAKE BOX (SEE COMPATIBLE JUNCTION BOXES BELOW) IS PRESENT. THESE INSTRUCTIONS ARE ORIENTED TOWARDS A CEILING INSTALLATION. WALL INSTALLATION IS THE SAME, JUST NOT FACING DOWN AS SHOWN IN THE DIAGRAMS.

DO NOT INSTALL IN AN APPLICATION THAT IS OUTSIDE OF THE PRODUCTS LISTED AMBIENT TEMPERATURE AND IN AN AREA THAT IS NOT EASILY ACCESSED FOR SERVICE REQUIREMENTS.

1. PRIOR TO INSTALLATION, install mounting plate onto the electrical junction box (by others) with mounting screws. Make sure screws are driven in fully (1). **NOTE: For installation into mud ring, use second set of screw holes in mounting plate.**



2. SECURE FIXTURE to mounting bracket with the safety cable. Let fixture hang while you wire it to house current (2).

3. WIRE FIXTURE TO HOUSE CURRENT following example shown (3).

4. SELECT COLOR TEMPERATURE with switch located on mounting side of fixture (4).

5. INSTALL FIXTURE onto mounting bracket by pushing round mounting collar up against mounting plate, and twisting so that the mounting screws are captured and fixture is locked in position (5).

6. TO MAINTAIN WET LISTING fixture must be sealed in caulk. Requires standard or deep J-Box for installation. Square or round mud rings are not compatible.

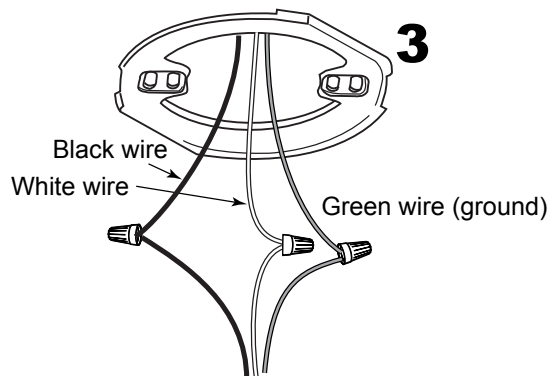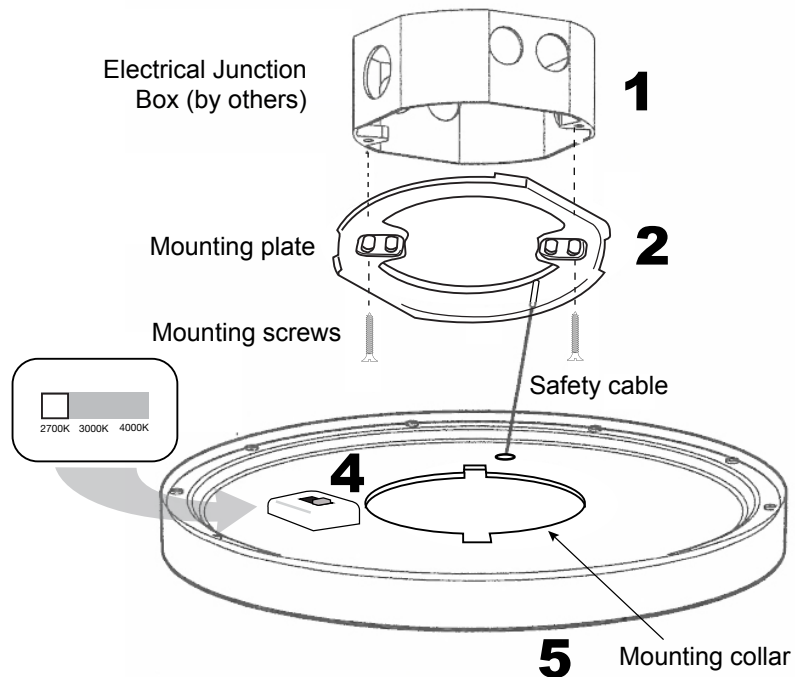

COMPATIBLE JUNCTION BOXES



4" OCTAGONAL BOX



4" SQ. OUTLET BOX



PLASTER (MUD) RING

COMPATIBLE DIMMERS:

LUTRON DVCL
LUTRON AYCL
LUTRON MA-PRO