


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 25.05 lm/W			
MODEL	NMS1217	I <sub>max</sub> (cd)	67.00	S/MH(C0/180)	1.27
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	217.42	h UP,DN(C0-180)	2.6,49.5
NOMINAL FLUX(lm)	217.422	CIE CLASS	DIRECT	h UP,DN(C180-360)	2.3,45.6
LAMPS INSIDE	1	h up(%)	4.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	95.1	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

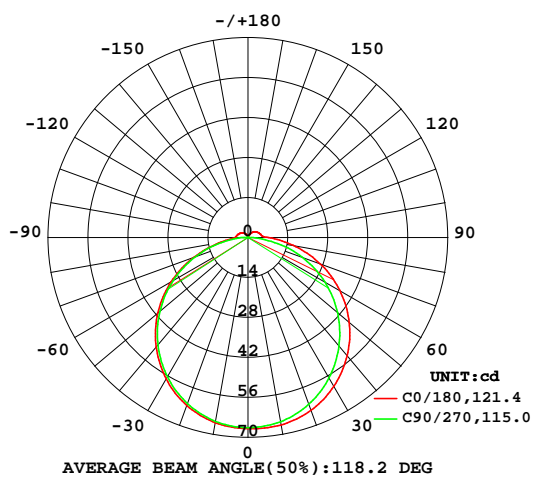

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

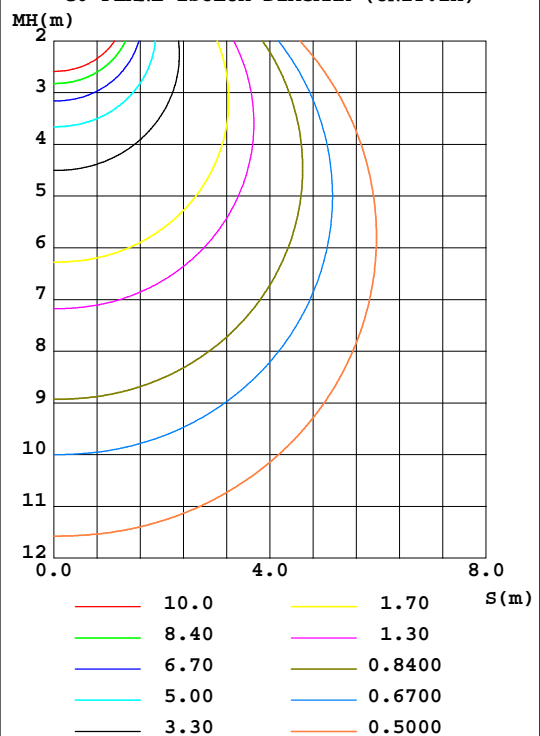

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:COLORS  
 Test Date:2019-04-03

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:7.500m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


g	C0	C90	C180	C270					g	F zone	F total	%lum,lamp
10	66.65	65.51	65.85	65.41					0~ 10	6.331	6.331	2.91,2.91
20	64.43	62.20	62.61	61.92					10~ 20	18.24	24.57	11.3,11.3
30	60.18	56.77	57.25	56.41					20~ 30	27.88	52.44	24.1,24.1
40	54.06	49.60	50.05	49.09					30~ 40	34.03	86.47	39.8,39.8
50	46.31	40.94	41.24	40.29					40~ 50	35.96	122.4	56.3,56.3
60	37.16	31.06	31.08	30.30					50~ 60	33.46	155.9	71.7,71.7
70	26.88	20.20	20.04	19.41					60~ 70	26.81	182.7	84,84
80	16.11	8.307	9.615	8.553					70~ 80	17.00	199.7	91.8,91.8
90	7.211	0.4733	4.539	1.657					80~ 90	7.053	206.7	95.1,95.1
100	4.829	0.0595	4.045	0.2100					90~100	2.885	209.6	96.4,96.4
110	4.369	0.0971	3.603	0.1739					100~110	2.298	211.9	97.5,97.5
120	3.839	0.1442	3.136	0.1827					110~120	1.929	213.9	98.4,98.4
130	3.222	0.1912	2.632	0.2068					120~130	1.525	215.4	99.1,99.1
140	2.436	0.2319	1.992	0.2459					130~140	1.088	216.5	99.6,99.6
150	0.7919	0.2696	1.378	0.2870					140~150	0.6198	217.1	99.8,99.8
160	0.2955	0.3002	0.3508	0.2962					150~160	0.2068	217.3	99.9,99.9
170	0.2988	0.3178	0.3340	0.3321					160~170	0.0890	217.4	100,100
180	0.3290	0.3322	0.3322	0.3416					170~180	0.0309	217.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

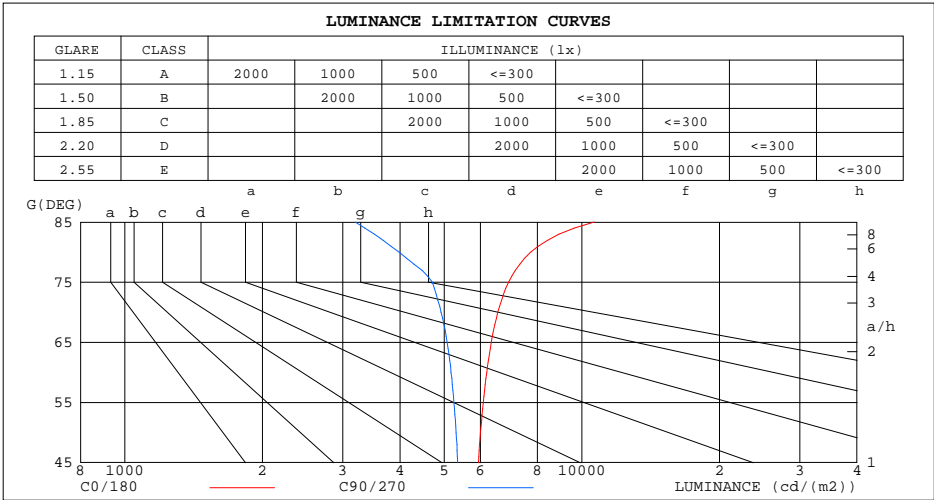

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	10642	3194
80	7733	3986
75	6915	4709
70	6549	4923
65	6336	5072
60	6193	5176
55	6086	5251
50	6004	5308
45	5937	5355


C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.08	1.08	1.08	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.86	.84	.85	.82	.80	.78
2.0	.88	.81	.75	.86	.79	.74	.81	.76	.71	.77	.73	.69	.73	.70	.66	.64
3.0	.77	.68	.62	.75	.67	.61	.71	.65	.59	.68	.62	.57	.65	.60	.56	.53
4.0	.68	.59	.52	.66	.58	.51	.63	.56	.50	.60	.54	.49	.57	.52	.48	.45
5.0	.60	.51	.44	.59	.50	.44	.56	.49	.43	.54	.47	.42	.51	.46	.41	.39
6.0	.54	.45	.39	.53	.45	.38	.51	.43	.38	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.39	.33	.44	.38	.33	.42	.36	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.29	.40	.34	.29	.39	.33	.29	.27
9.0	.41	.33	.27	.40	.32	.27	.39	.32	.26	.37	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.34	.28	.24	.33	.27	.23	.22

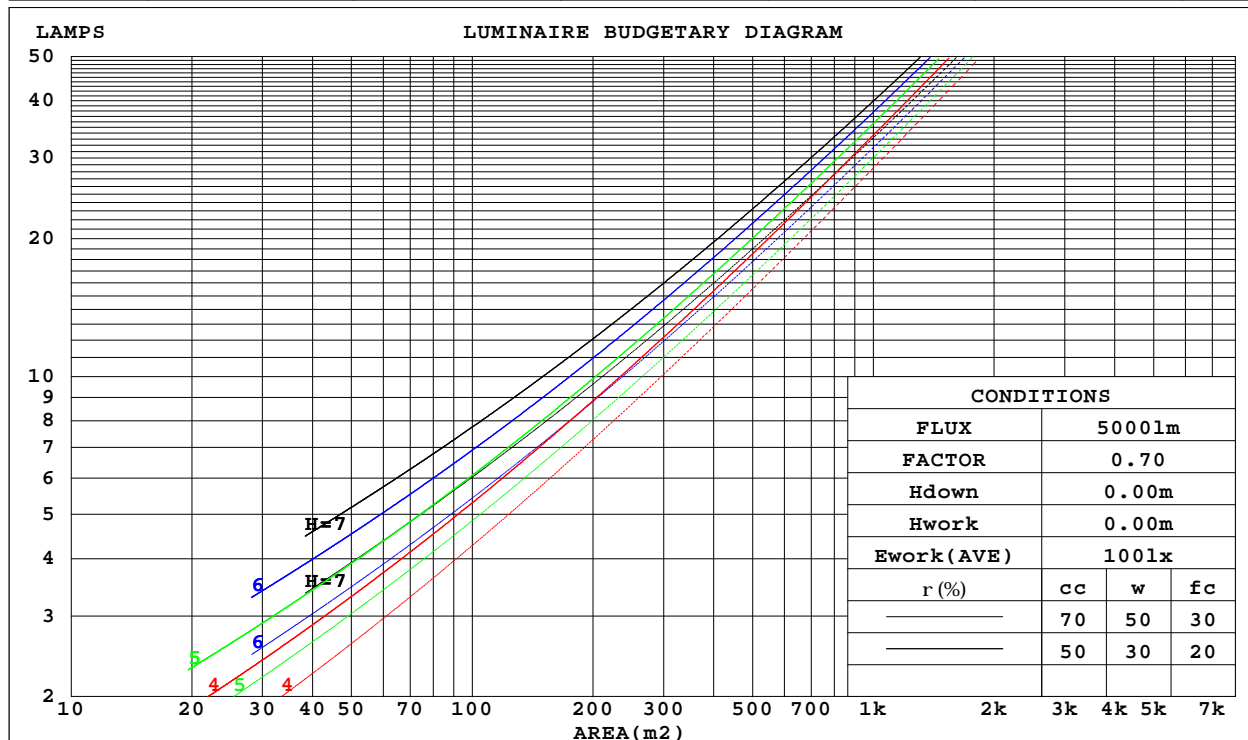

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:COLORS  
 Test Date:2019-04-03

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:7.500m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients(WEC)												
0.0																
1.0	.330	.188	.060	.322	.184	.058	.306	.175	.056	.291	.168	.054	.277	.161	.052	
2.0	.304	.167	.051	.296	.163	.050	.282	.157	.049	.269	.151	.047	.256	.145	.046	
3.0	.278	.148	.044	.271	.145	.044	.258	.140	.043	.247	.135	.041	.235	.130	.040	
4.0	.255	.132	.039	.249	.130	.038	.237	.126	.038	.227	.122	.037	.217	.118	.036	
5.0	.234	.119	.035	.229	.118	.034	.219	.114	.034	.209	.110	.033	.200	.107	.032	
6.0	.217	.109	.031	.212	.107	.031	.203	.104	.030	.194	.101	.030	.186	.098	.029	
7.0	.201	.099	.028	.197	.098	.028	.188	.095	.027	.180	.093	.027	.173	.090	.026	
8.0	.187	.092	.026	.183	.090	.026	.176	.088	.025	.169	.085	.025	.162	.083	.024	
9.0	.175	.085	.024	.172	.084	.023	.165	.082	.023	.158	.079	.023	.152	.077	.022	
10.0	.165	.079	.022	.161	.078	.022	.155	.076	.021	.149	.074	.021	.144	.072	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.228	.228	.228	.195	.195	.195	.133	.133	.133	.076	.076	.076	.024	.024	.024	
1.0	.219	.194	.170	.188	.166	.147	.128	.114	.101	.074	.066	.059	.024	.021	.019	
2.0	.212	.170	.134	.181	.146	.116	.124	.101	.081	.072	.059	.048	.023	.019	.015	
3.0	.204	.153	.111	.175	.132	.097	.120	.091	.068	.069	.053	.040	.022	.017	.013	
4.0	.197	.139	.096	.169	.120	.083	.116	.084	.059	.067	.049	.035	.022	.016	.011	
5.0	.189	.129	.085	.162	.112	.074	.112	.078	.052	.065	.046	.031	.021	.015	.010	
6.0	.182	.121	.077	.156	.105	.067	.108	.073	.048	.063	.043	.028	.020	.014	.009	
7.0	.175	.114	.072	.150	.099	.062	.104	.069	.044	.060	.041	.026	.020	.013	.009	
8.0	.168	.108	.067	.145	.094	.059	.100	.066	.042	.058	.039	.025	.019	.013	.008	
9.0	.162	.104	.064	.140	.090	.056	.097	.063	.040	.056	.037	.024	.018	.012	.008	
10.0	.157	.099	.061	.135	.086	.053	.094	.061	.038	.055	.036	.023	.018	.012	.008	

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm										
NAME: NMS1217					TYPE:			WEIGHT:		
SPEC.:NMS1217-OG24NSN050CC0100-PLus					DIM.: 1000*12*17			SERIAL No.:		
MFR.: Colors					SUR.:1000*12*17			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.4	25.9	24.8	26.2	26.5	23.8	25.3	24.1	25.6	25.9
3H	26.4	27.8	26.8	28.1	28.4	25.4	26.8	25.8	27.1	27.5
4H	27.3	28.6	27.7	29.0	29.3	26.1	27.4	26.5	27.8	28.1
6H	28.2	29.4	28.6	29.8	30.2	26.6	27.8	27.0	28.2	28.5
8H	28.6	29.8	29.0	30.2	30.6	26.7	27.9	27.1	28.3	28.6
12H	29.0	30.2	29.5	30.6	31.0	26.8	27.9	27.2	28.3	28.7
4H 2H	25.0	26.3	25.4	26.7	27.1	24.6	25.9	24.9	26.2	26.6
3H	27.2	28.3	27.6	28.7	29.1	26.4	27.5	26.8	27.9	28.3
4H	28.3	29.3	28.7	29.7	30.2	27.2	28.3	27.7	28.7	29.1
6H	29.3	30.2	29.8	30.7	31.1	27.8	28.7	28.3	29.2	29.7
8H	29.8	30.7	30.3	31.1	31.6	28.0	28.9	28.5	29.3	29.8
12H	30.3	31.1	30.8	31.6	32.1	28.1	28.9	28.6	29.4	29.9
8H 4H	28.6	29.4	29.1	29.9	30.4	27.6	28.5	28.1	29.0	29.5
6H	29.8	30.5	30.3	31.0	31.5	28.4	29.2	29.0	29.6	30.2
8H	30.4	31.1	31.0	31.6	32.1	28.7	29.4	29.3	29.9	30.4
12H	31.1	31.7	31.7	32.2	32.8	28.9	29.5	29.5	30.0	30.6
12H 4H	28.6	29.4	29.1	29.8	30.4	27.7	28.5	28.2	29.0	29.5
6H	29.9	30.5	30.4	31.0	31.6	28.6	29.2	29.1	29.7	30.3
8H	30.5	31.1	31.1	31.6	32.2	28.9	29.5	29.5	30.0	30.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 217.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -5.3)

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	54	42	35	52	42	35	29
0.80	64	52	45	63	52	45	61	51	44	37
1.00	73	61	53	71	60	53	69	61	52	45
1.25	80	69	61	78	68	61	75	66	60	51
1.50	85	74	67	83	73	66	79	71	65	56
2.00	92	83	76	90	81	75	86	78	73	64
2.50	96	88	81	94	86	80	89	83	77	68
3.00	99	92	86	97	90	85	92	87	82	72
4.00	104	97	92	101	95	91	96	91	87	77
5.00	106	101	96	103	99	94	98	94	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

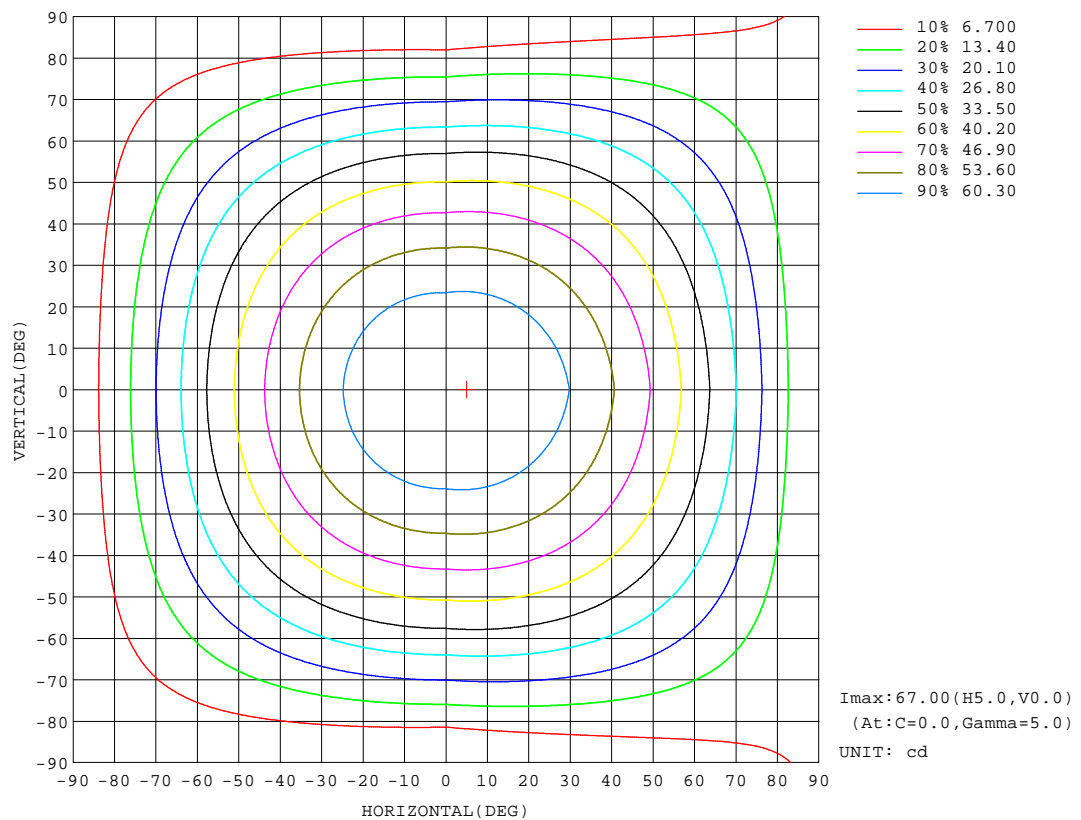

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: COLORS  
Test Date: 2019-04-03


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.500m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

Flux out:149.6 lm

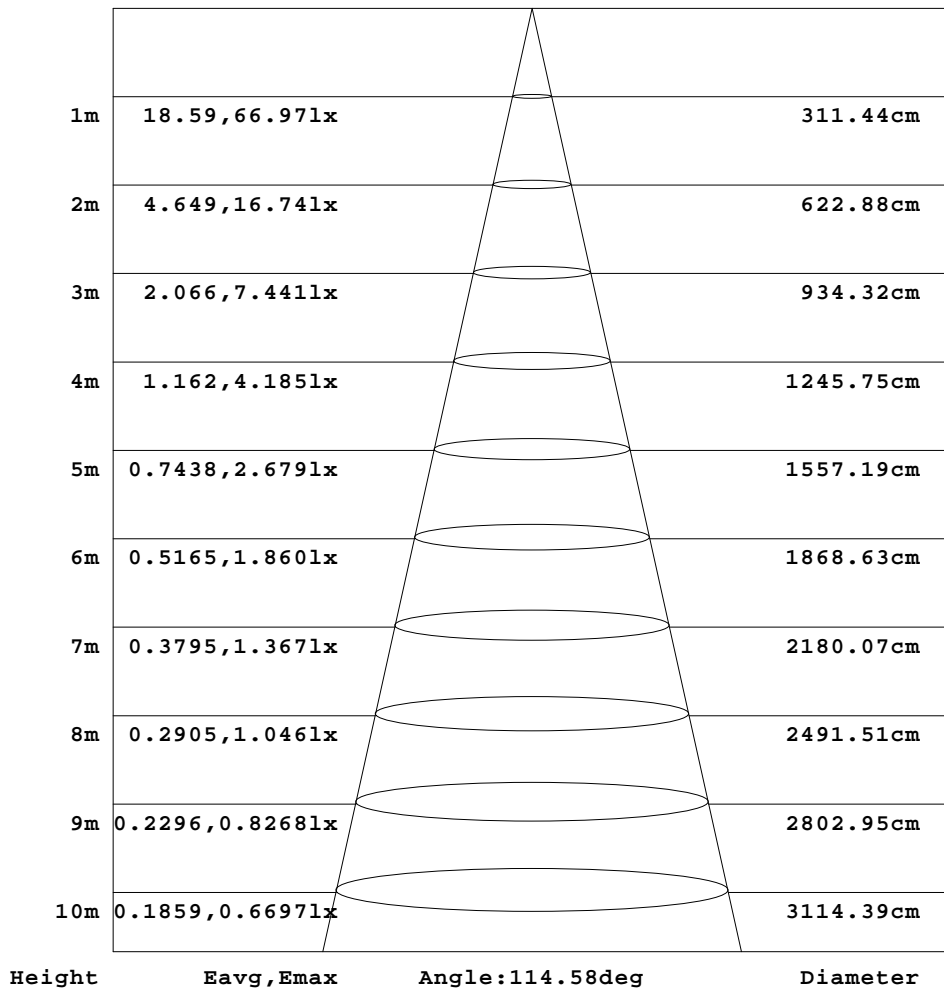


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

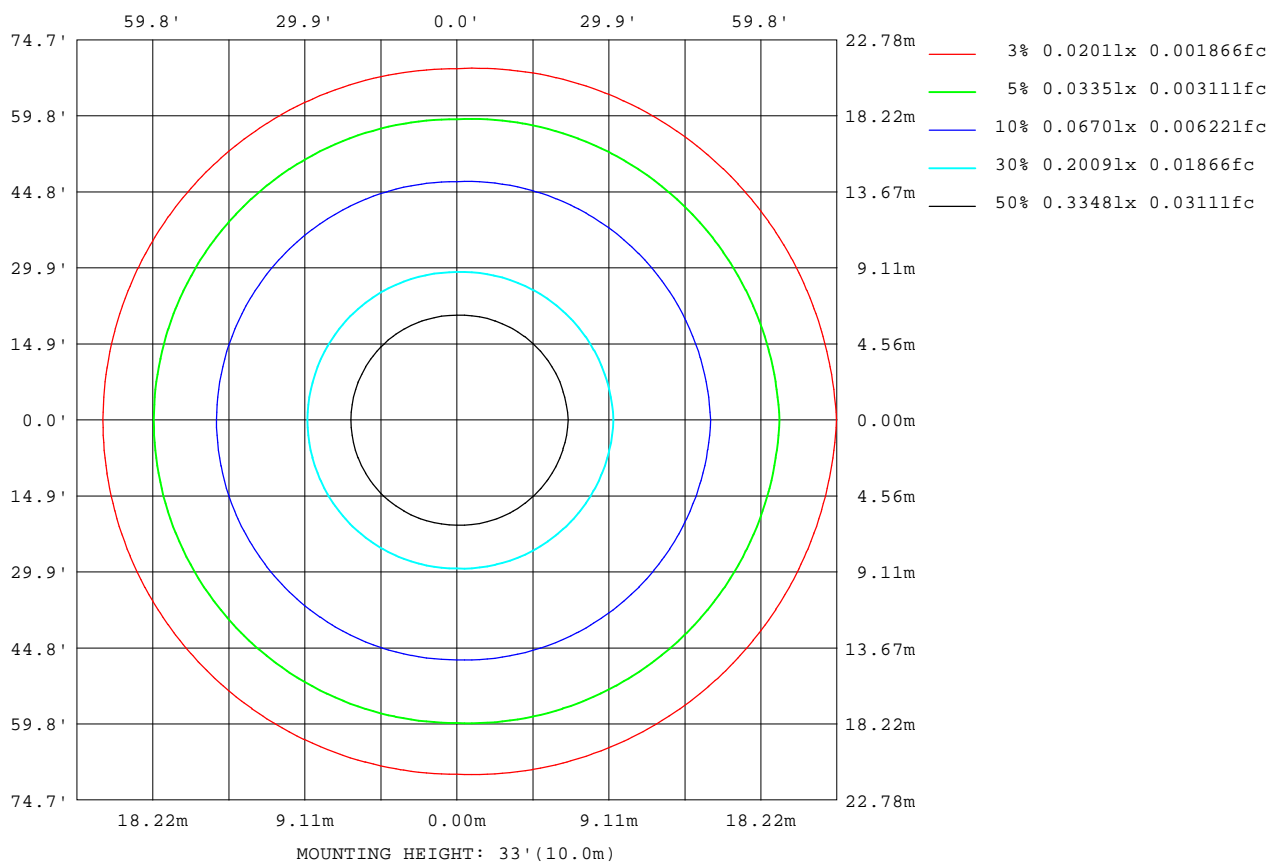

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	5693
L_0~180(75)av	5804
L_0~180(85)av	8203
L_90~270(65)av	4996
L_90~270(75)av	4581
L_90~270(85)av	3590
L_45(65)av	5217
L_45(75)av	4970
L_45(85)av	5167

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:COLORS  
 Test Date:2019-04-03

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:7.500m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

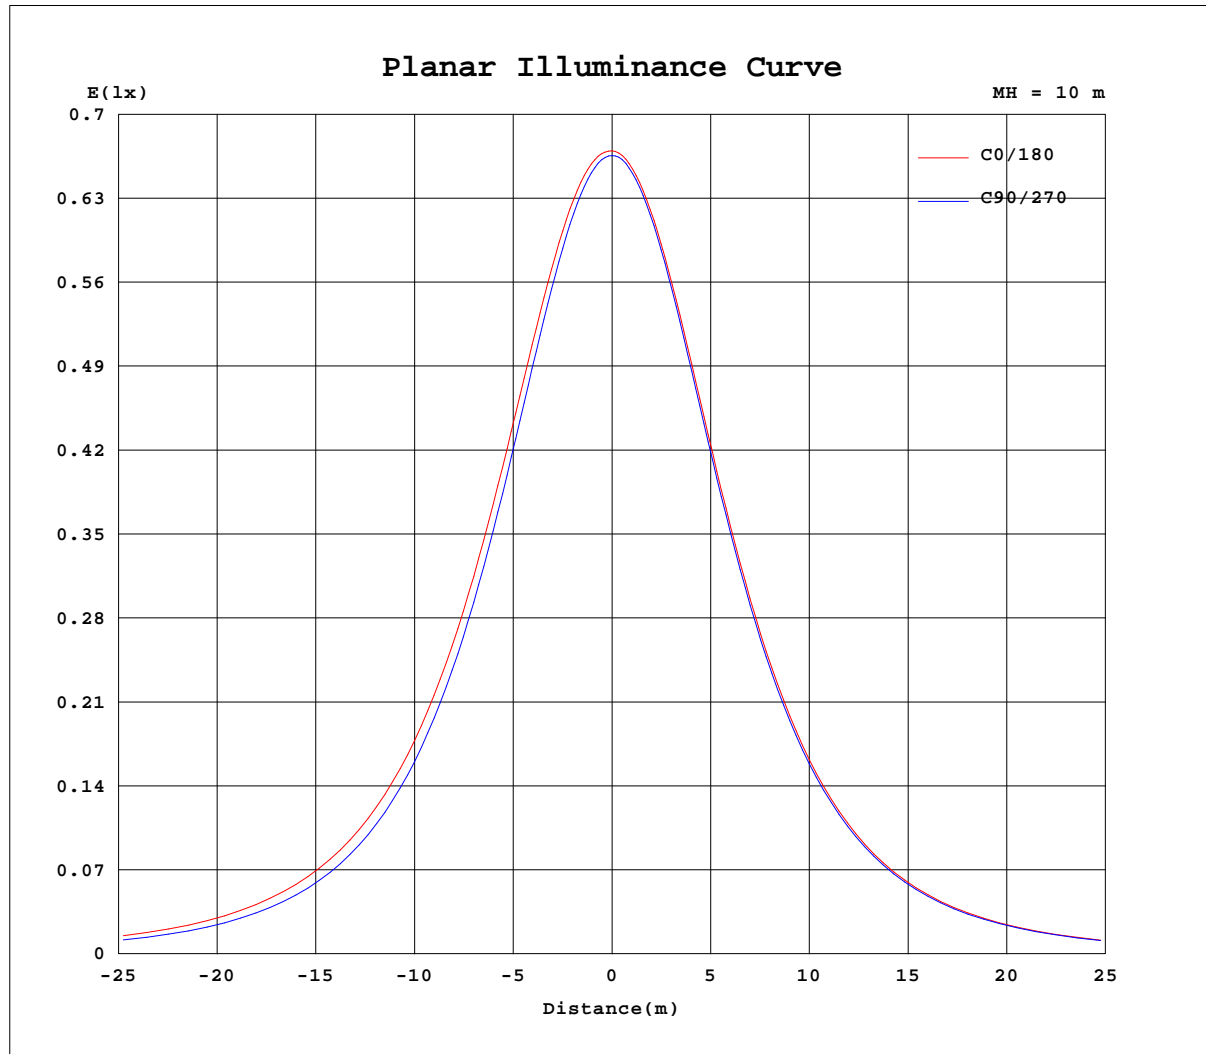

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: COLORS  
Test Date: 2019-04-03

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.500m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3620A P:8.680W PF:0 Freq:0Hz Lamp Flux:217.422x1 lm		
NAME: NMS1217	TYPE:	WEIGHT:
SPEC.:NMS1217-OG24NSN050CC0100-PLus	DIM.: 1000*12*17	SERIAL No.:
MFR.: Colors	SUR.:1000*12*17	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	90	180	270															
0	67.0	66.6	67.0	66.6															
5	67.0	66.3	66.7	66.3															
10	66.6	65.5	65.8	65.4															
15	65.8	64.1	64.5	63.9															
20	64.4	62.2	62.6	61.9															
25	62.6	59.7	60.2	59.4															
30	60.2	56.8	57.3	56.4															
35	57.3	53.4	53.9	53.0															
40	54.1	49.6	50.1	49.1															
45	50.4	45.4	45.8	44.9															
50	46.3	40.9	41.2	40.3															
55	41.9	36.1	36.3	35.4															
60	37.2	31.1	31.1	30.3															
65	32.1	25.7	25.6	24.9															
70	26.9	20.2	20.0	19.4															
75	21.5	14.6	14.6	13.8															
80	16.1	8.31	9.62	8.55															
85	11.1	3.34	6.03	4.17															
90	7.21	0.47	4.54	1.66															
95	5.26	0.11	4.25	0.39															
100	4.83	0.06	4.04	0.21															
105	4.60	0.07	3.84	0.17															
110	4.37	0.10	3.60	0.17															
115	4.11	0.12	3.36	0.18															
120	3.84	0.14	3.14	0.18															
125	3.55	0.17	2.89	0.19															
130	3.22	0.19	2.63	0.21															
135	2.86	0.21	2.31	0.24															
140	2.44	0.23	1.99	0.25															
145	1.69	0.25	1.68	0.25															
150	0.79	0.27	1.38	0.29															
155	0.29	0.29	0.65	0.29															
160	0.30	0.30	0.35	0.30															
165	0.30	0.31	0.34	0.30															
170	0.30	0.32	0.33	0.33															
175	0.30	0.33	0.33	0.34															
180	0.33	0.33	0.33	0.34															

C Range: 0 - 360DEG  
C Interval: 90.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-04-03

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.500m [K=1.0000]  
Remarks: