

# Surface Mount Downlight

## 120V R6 Series, 6" Low Profile Disk

### SPECIFICATION SHEET

**GM Lighting**®

Project Name	Type
Catalog #	Date

#### PRODUCT OVERVIEW

A closet rated, wet location and Title 24 approved circular surface mount downlight that features white powder coat steel housing with white opal lens and full gasketing. Mounts to standard fixture box or with recessed R6-RKT mounting kit, ordered separately. See below.



#### FEATURES

- 120V operation
- Wet location
- Dimmable (TRIAC)
- Full foam gasketing
- Mounts to a standard J-Box or 6" recessed downlight (requires R6-RKT mounting kit)
- 3-year warranty

#### SPECIFICATIONS

##### ELECTRICAL

- 120V
- 15W
- 90+ CRI
- 120° beam angle

##### LUMENS

- 2700K / 830lm
- 3000K / 870lm
- 4000K / 900lm

##### WARRANTY

- 3-year warranty

##### OPERATING TEMP

- -4 to 122°F (-20 to +50°C)

##### CERTIFICATION

- CSA-US
- Closet Rated - Conforms to NEC 410.16 (A) (3) and 410.16 (C)
- Title 24
- Energy Star

NOTE: Do not install in an environment outside the listed ambient temperature

#### ORDERING INFORMATION

Example: R6-2790-BN


Model	Color Temp	Color
R6	2790	BN Brushed Nickel
	3090	WH White
	4090	

#### ACCESSORIES

Model	Description
R6-RKT	Retrofit kit for R6 fixture

# Surface Mount Downlight

120V R6 Series, 6" Low Profile Disk  
SPECIFICATION SHEET

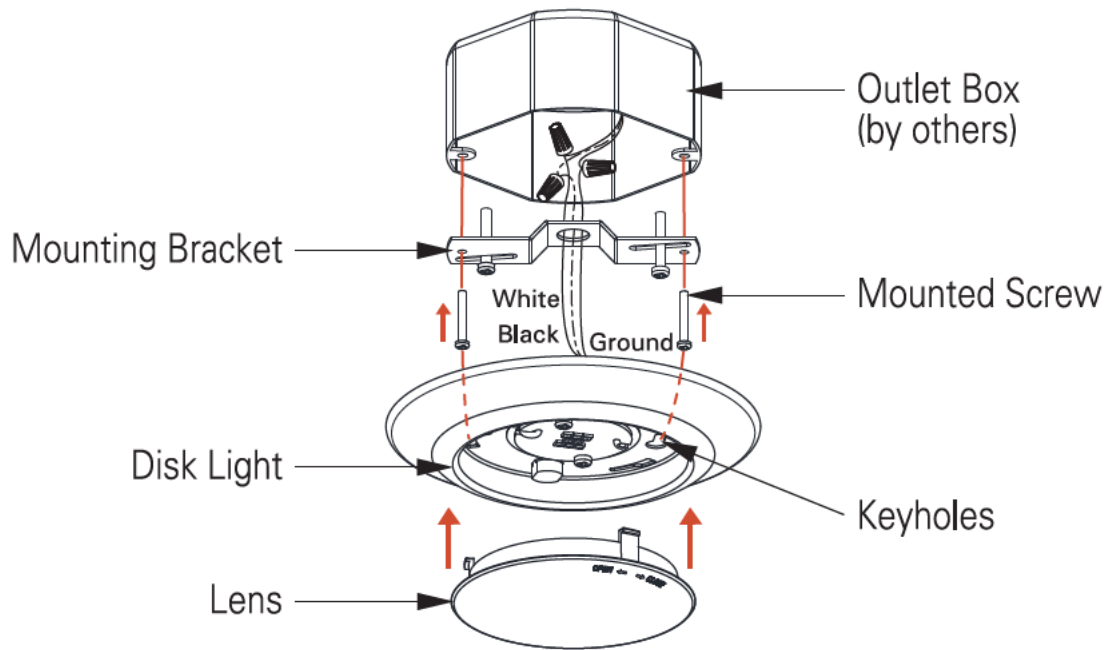

## DIMENSIONS

