

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

DATA OF LAMP		Imax(cd)	20.05	S/MH(C0/180)	1.30
MODEL	2216	EFFICIENCY(%)	100.0	S/MH(C90/270)	1.30
NOMINAL POWER(W)	1	TOTAL FLUX(lm)	61.85	Voltage(V)	12.35
RATED VOLTAGE(V)	12	EFFICIENCY(lm/W)	69.5	Current(A)	0.090
NOMINAL FLUX(lm)	61.85	η up(%)	0.1	Power(W)	0.890
LAMPS QUANTITY	1	η down(%)	7.0	Power Factor(PF)	0.794
TEST VOLTAGE(V)	12.4	Effective Flux(lm)	0.0	EEI	0.000

LUMINOUS INTENSITY DISTRIBUTION

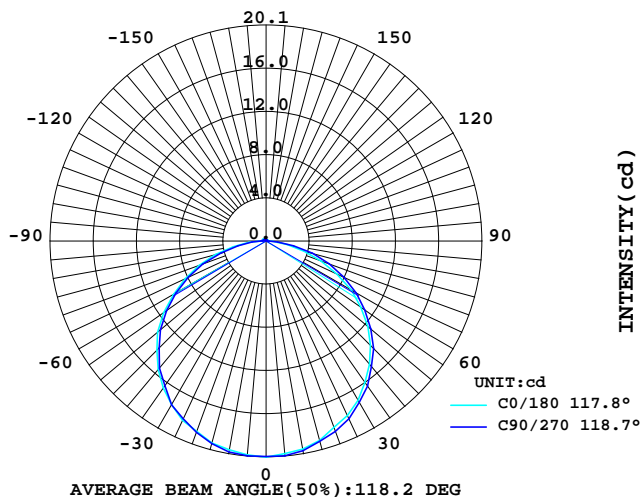

LUMINOUS INTENSITY DISTRIBUTION

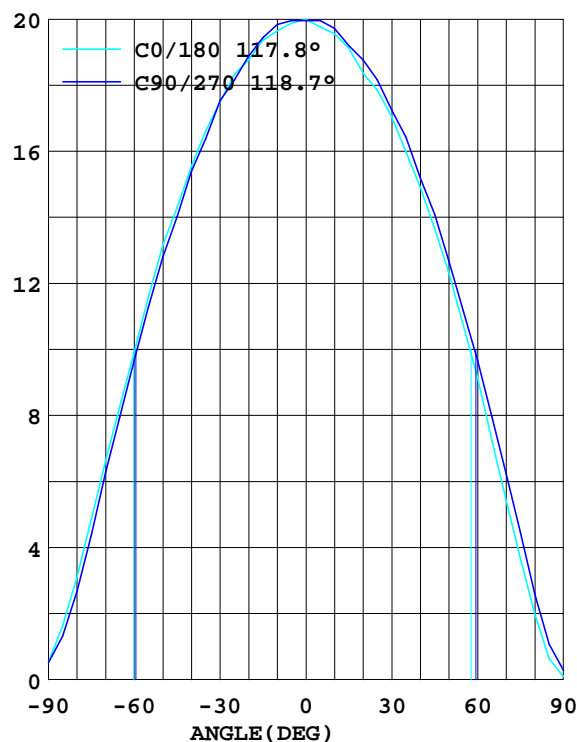

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

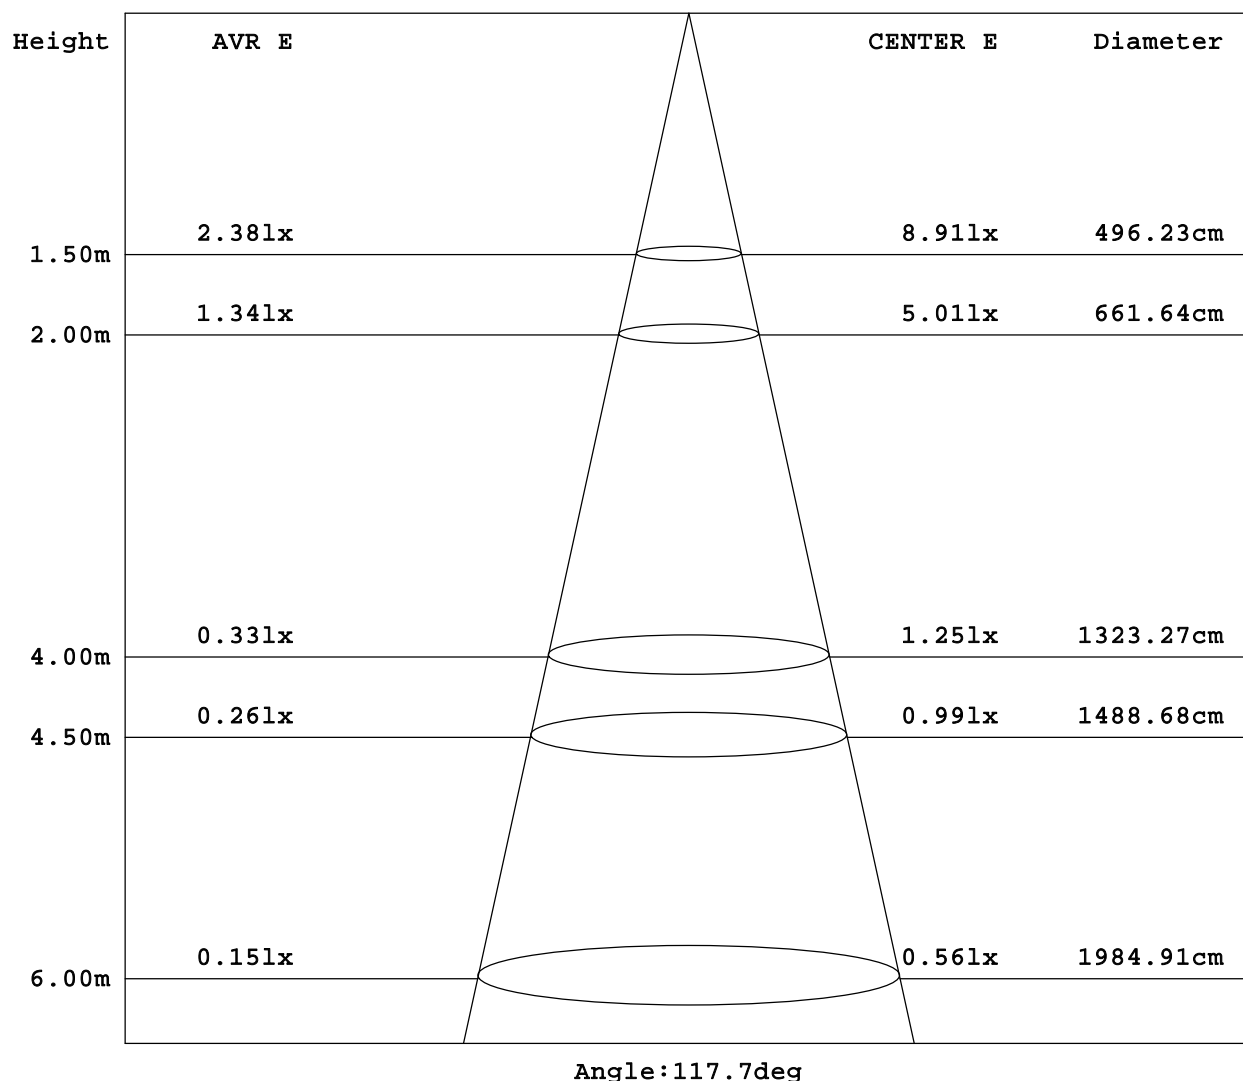

Test System: HOP00 HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	zone	total
10.0	19.69	19.77	19.89	19.65	19.61	19.85	19.77	19.77	0- 10	1.897	1.897
20.0	18.81	18.85	18.93	18.49	18.41	18.85	18.81	19.05	10- 20	5.459	7.357
30.0	17.53	17.29	17.57	17.01	17.09	17.41	17.29	17.61	20- 30	8.376	15.73
40.0	15.57	15.01	15.41	14.97	14.93	15.61	15.21	15.61	30- 40	10.25	25.99
50.0	13.18	12.30	12.82	12.34	12.34	13.02	12.70	13.14	40- 50	10.84	36.83
60.0	9.945	9.266	9.706	9.146	9.186	9.985	9.706	10.14	50- 60	10.02	46.86
70.0	6.630	5.791	6.270	5.711	5.432	6.590	6.231	6.630	60- 70	7.810	54.67
80.0	3.115	2.396	2.676	2.316	1.997	3.035	2.596	3.195	70- 80	4.629	59.30
90.0	0.519	0.200	0.519	0.240	0.080	0.639	0.280	0.759	80- 90	1.505	60.80
100.0	0.359	0.040	0.399	0.080	0	0.320	0	0.240	90-100	0.266	61.07
110.0	0.280	0.040	0.240	0	0.120	0.280	0.040	0.280	100-110	0.177	61.24
120.0	0.359	0.040	0.240	0.160	0.080	0.280	0.120	0.200	110-120	0.170	61.41
130.0	0.280	0.080	0.160	0.080	0.200	0.200	0.120	0.200	120-130	0.146	61.56
140.0	0.160	0.080	0.240	0.120	0.120	0.200	0.040	0.040	130-140	0.111	61.67
150.0	0.080	0.040	0.200	0.120	0.160	0.200	0.120	0.320	140-150	0.072	61.74
160.0	0.120	0.160	0.080	0.040	0.080	0.120	0.080	0.080	150-160	0.058	61.80
170.0	0.200	0.040	0.160	0.080	0.200	0.080	0.160	0.160	160-170	0.038	61.84
180.0	0.160	0.120	0.160	0.080	0.200	0.040	0.080	0.080	170-180	0.011	61.85
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:	
SPECIFICATION:3000K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

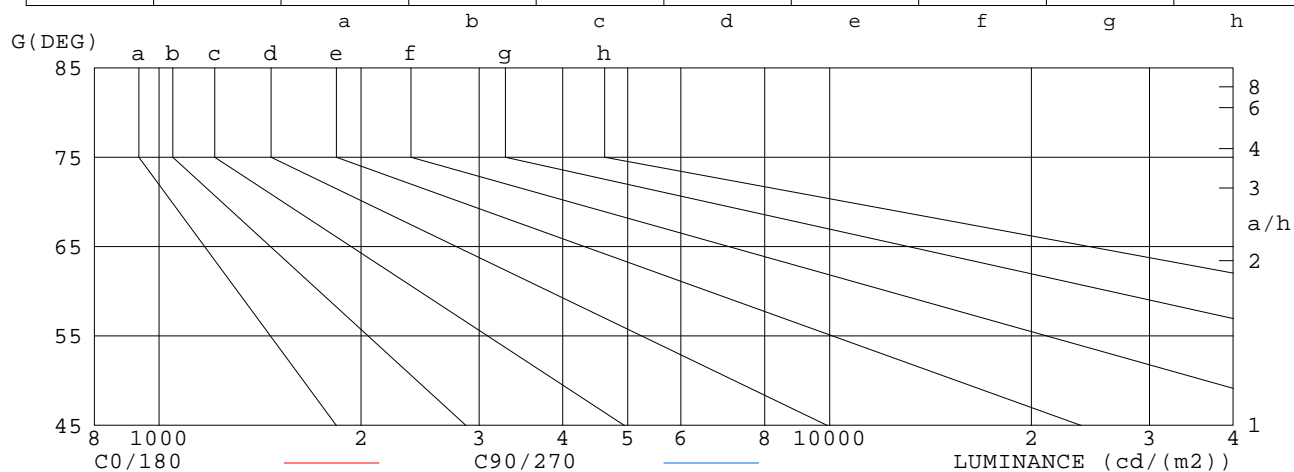

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	188	151
80	179	154
75	188	170
70	194	183
65	197	189
60	199	194
55	203	197
50	205	199
45	203	199

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

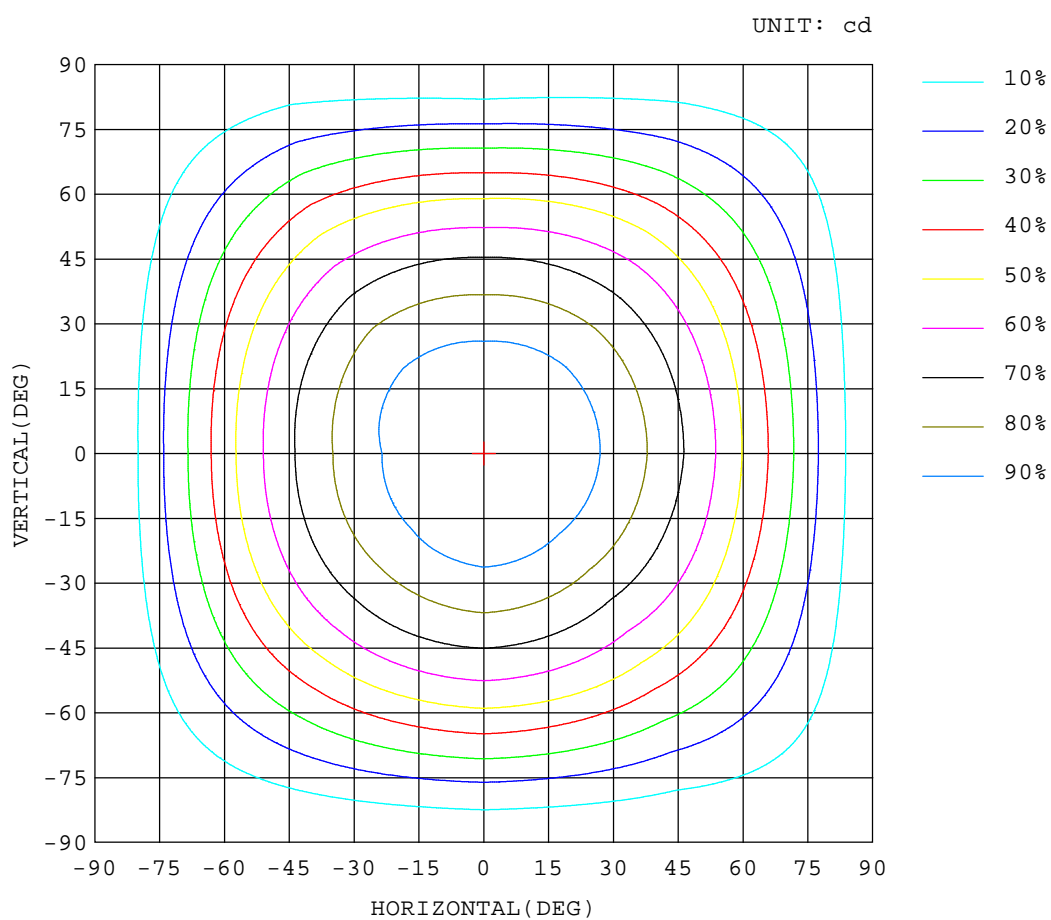

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

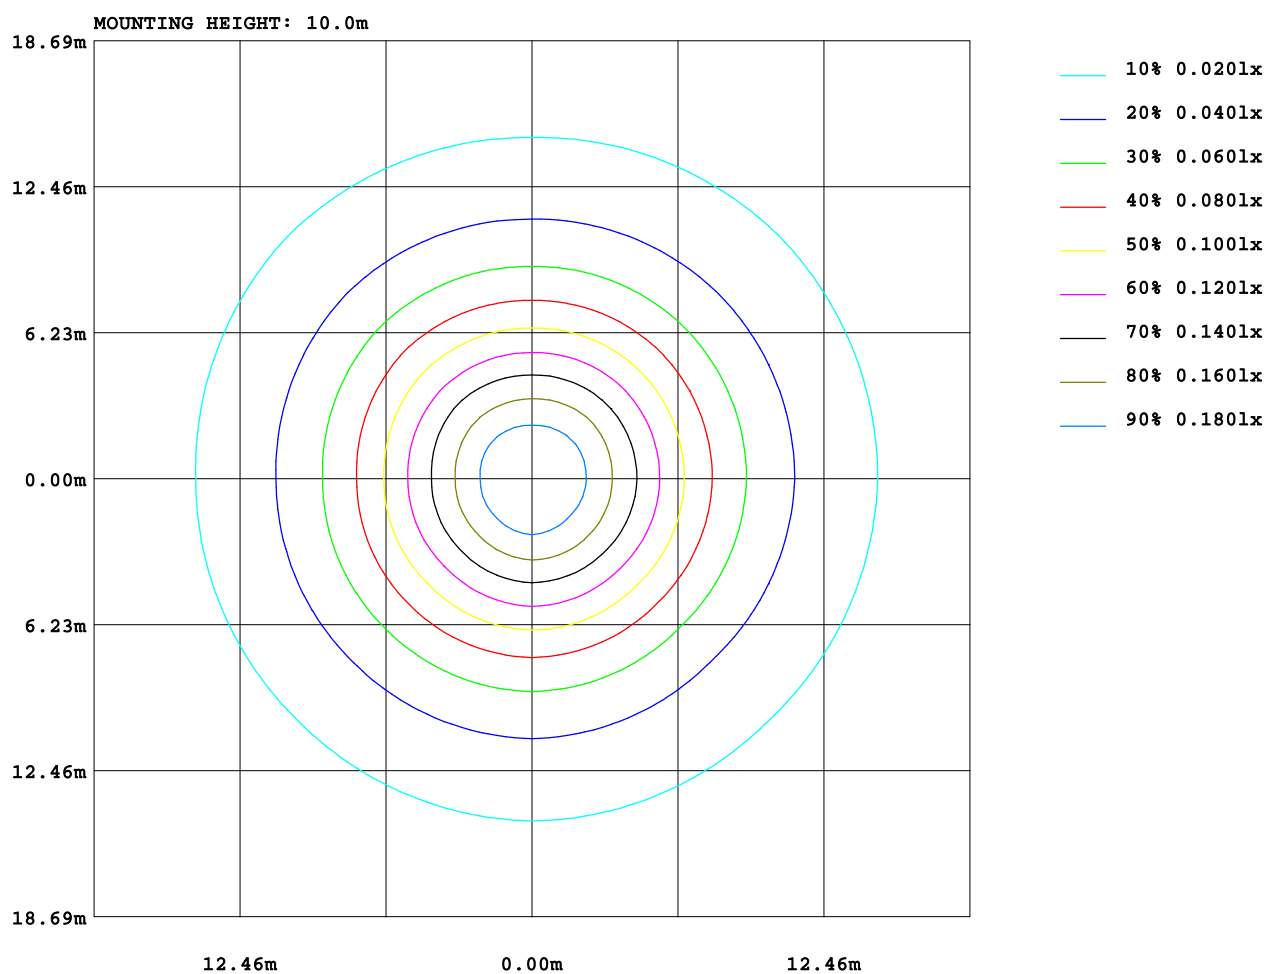

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

VERTICAL (DEG)	AREA FLUX DIAGRAM																		UNIT:lm		Φ t	Φ a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90			
90	0.00	0.00	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.44	0.11		
80	0.00	0.01	0.02	0.04	0.07	0.09	0.11	0.13	0.13	0.14	0.13	0.11	0.10	0.07	0.05	0.03	0.01	0.00	1.23	1.18		
70	0.00	0.01	0.03	0.07	0.12	0.16	0.20	0.23	0.24	0.24	0.23	0.20	0.17	0.12	0.08	0.04	0.02	0.00	2.17	2.15		
60	0.00	0.02	0.05	0.10	0.17	0.23	0.28	0.32	0.34	0.34	0.32	0.29	0.23	0.17	0.11	0.06	0.02	0.00	3.05	3.04		
50	0.00	0.02	0.06	0.13	0.21	0.29	0.35	0.40	0.43	0.43	0.40	0.36	0.29	0.22	0.14	0.07	0.03	0.00	3.83	3.82		
40	0.00	0.02	0.08	0.15	0.24	0.34	0.41	0.47	0.49	0.49	0.47	0.41	0.34	0.25	0.16	0.09	0.03	0.00	4.47	4.46		
30	0.00	0.03	0.09	0.17	0.27	0.37	0.46	0.52	0.55	0.55	0.52	0.46	0.38	0.28	0.18	0.10	0.04	0.01	4.95	4.95		
	0.00	0.03	0.09	0.18	0.29	0.39	0.48	0.55	0.58	0.58	0.55	0.49	0.40	0.30	0.20	0.10	0.04	0.01	5.27	5.26		
	0.00	0.03	0.10	0.19	0.29	0.40	0.49	0.56	0.60	0.60	0.57	0.50	0.41	0.31	0.20	0.11	0.04	0.01	5.41	5.40		
	0.00	0.03	0.09	0.19	0.29	0.40	0.49	0.56	0.60	0.60	0.56	0.50	0.41	0.31	0.20	0.11	0.04	0.01	5.39	5.38		
	0.00	0.03	0.09	0.18	0.28	0.38	0.47	0.54	0.58	0.58	0.55	0.48	0.39	0.29	0.19	0.10	0.04	0.01	5.21	5.20		
-30	0.00	0.03	0.08	0.17	0.26	0.36	0.44	0.51	0.55	0.55	0.51	0.45	0.36	0.27	0.18	0.09	0.03	0.01	4.86	4.85		
-40	0.00	0.02	0.07	0.15	0.23	0.32	0.40	0.46	0.49	0.49	0.46	0.40	0.32	0.24	0.16	0.08	0.03	0.00	4.35	4.34		
-50	0.00	0.02	0.06	0.12	0.20	0.27	0.34	0.39	0.42	0.42	0.39	0.34	0.27	0.20	0.13	0.07	0.03	0.00	3.69	3.68		
-60	0.00	0.01	0.05	0.09	0.15	0.21	0.27	0.31	0.34	0.34	0.31	0.27	0.21	0.16	0.10	0.05	0.02	0.00	2.90	2.89		
-70	0.00	0.01	0.03	0.06	0.10	0.15	0.19	0.22	0.24	0.24	0.22	0.19	0.15	0.11	0.07	0.04	0.01	0.00	2.02	1.99		
-80	0.00	0.01	0.02	0.03	0.05	0.08	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	1.10	1.00		
-90	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.36	0.06		
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
Φ t	0.03	0.33	1.02	2.07	3.28	4.50	5.57	6.36	6.80	6.81	6.40	5.63	4.58	3.40	2.22	1.19	0.45	0.07	62			
Φ a	0.00	0.27	0.97	2.01	3.23	4.45	5.51	6.31	6.74	6.75	6.35	5.57	4.53	3.35	2.17	1.14	0.40	0.03		60		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:


LEDWISE TECHNOLOGY LIMITED TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

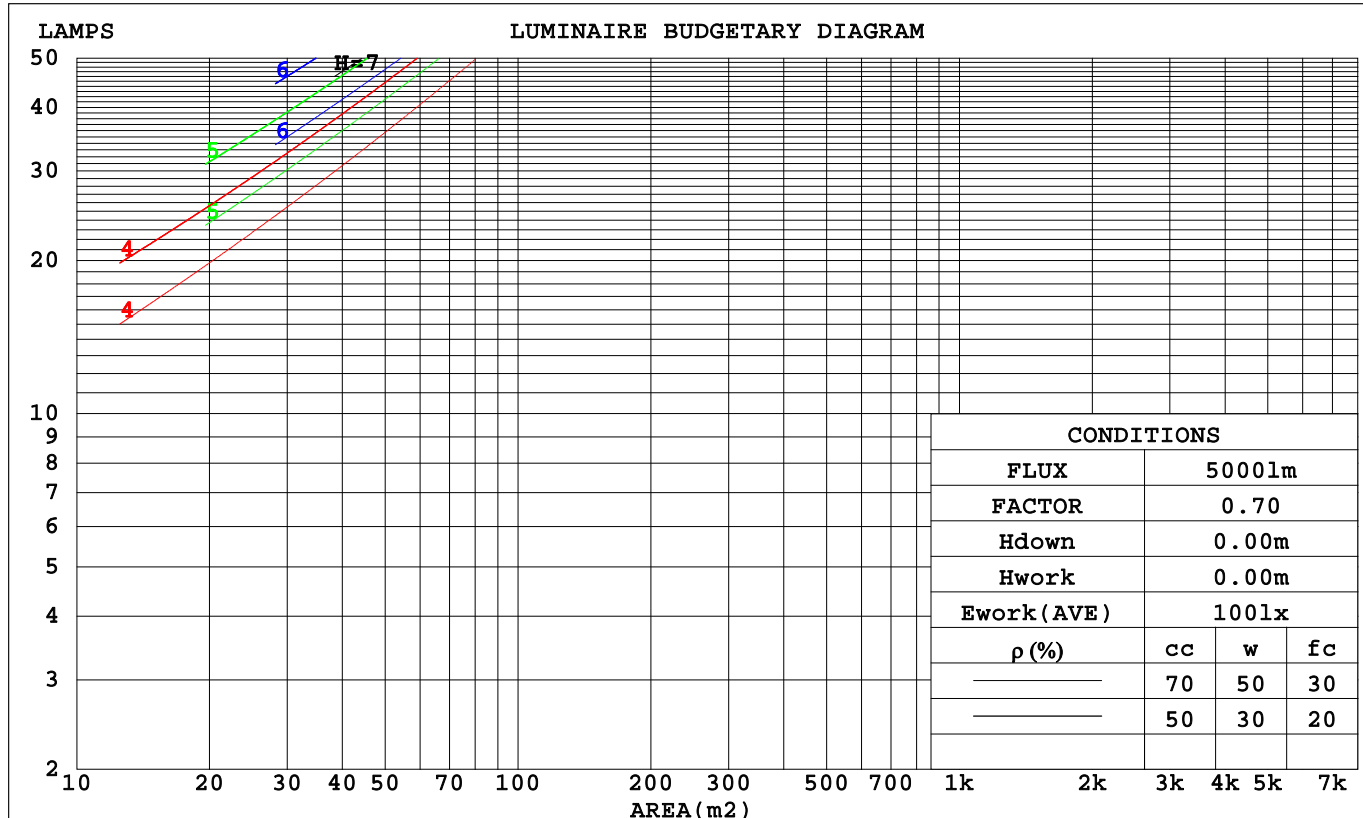

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

WEC AND CCEC

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.023	.013	.004	.022	.013	.004	.021	.012	.004	.020	.012	.004	.020	.011	.004		
2.0	.021	.012	.004	.021	.012	.004	.020	.011	.003	.019	.011	.003	.018	.010	.003		
3.0	.020	.010	.003	.019	.010	.003	.018	.010	.003	.018	.010	.003	.017	.009	.003		
4.0	.018	.009	.003	.018	.009	.003	.017	.009	.003	.016	.009	.003	.016	.009	.003		
5.0	.017	.009	.002	.016	.008	.002	.016	.008	.002	.015	.008	.002	.015	.008	.002		
6.0	.015	.008	.002	.015	.008	.002	.015	.007	.002	.014	.007	.002	.014	.007	.002		
7.0	.014	.007	.002	.014	.007	.002	.014	.007	.002	.013	.007	.002	.013	.007	.002		
8.0	.013	.007	.002	.013	.006	.002	.013	.006	.002	.012	.006	.002	.012	.006	.002		
9.0	.013	.006	.002	.012	.006	.002	.012	.006	.002	.012	.006	.002	.011	.006	.002		
10.0	.012	.006	.002	.012	.006	.002	.011	.005	.002	.011	.005	.002	.011	.005	.002		

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.015	.015	.015	.012	.012	.012	.008	.008	.008	.005	.005	.005	.002	.002	.002		
1.0	.014	.012	.010	.012	.010	.009	.008	.007	.006	.005	.004	.004	.001	.001	.001		
2.0	.013	.010	.008	.011	.009	.007	.008	.006	.005	.005	.004	.003	.001	.001	.001		
3.0	.013	.009	.006	.011	.008	.005	.008	.005	.004	.004	.003	.002	.001	.001	.001		
4.0	.012	.008	.005	.011	.007	.004	.007	.005	.003	.004	.003	.002	.001	.001	.001		
5.0	.012	.007	.004	.010	.006	.004	.007	.004	.003	.004	.003	.002	.001	.001	.001		
6.0	.011	.007	.004	.010	.006	.003	.007	.004	.002	.004	.002	.001	.001	.001	.000		
7.0	.011	.006	.003	.009	.006	.003	.006	.004	.002	.004	.002	.001	.001	.001	.000		
8.0	.010	.006	.003	.009	.005	.003	.006	.004	.002	.004	.002	.001	.001	.001	.000		
9.0	.010	.006	.003	.008	.005	.002	.006	.003	.002	.003	.002	.001	.001	.001	.000		
10.0	.009	.005	.003	.008	.005	.002	.006	.003	.002	.003	.002	.001	.001	.001	.000		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

Uncorrected UGR Table

Report number:

MANUFACTURER:	Address:			
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条		WEIGHT:	
SPECIFICATION:3000K	DIMENSION: 10MM*2FT		SERIAL No.:带调光测试	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.2	8.7	7.5	9.0	9.2	7.1	8.6	7.4	8.9	9.1
3H	8.9	10.3	9.2	10.6	10.9	8.7	10.1	9.1	10.4	10.7
4H	9.6	11.0	10.0	11.2	11.5	9.3	10.7	9.7	11.0	11.3
6H	10.1	11.4	10.5	11.7	12.0	9.8	11.0	10.1	11.3	11.6
8H	10.3	11.5	10.7	11.8	12.2	9.9	11.1	10.2	11.4	11.7
12H	10.5	11.6	10.8	12.0	12.3	10.0	11.1	10.3	11.5	11.8
4H 2H	7.8	9.1	8.1	9.4	9.7	7.7	9.0	8.0	9.3	9.6
3H	9.6	10.8	10.0	11.1	11.5	9.5	10.6	9.9	11.0	11.3
4H	10.4	11.5	10.8	11.9	12.2	10.2	11.3	10.6	11.6	12.0
6H	11.1	12.0	11.5	12.4	12.8	10.7	11.7	11.2	12.1	12.5
8H	11.3	12.2	11.8	12.6	13.0	10.9	11.8	11.3	12.2	12.6
12H	11.5	12.3	12.0	12.8	13.2	11.0	11.8	11.5	12.3	12.7
8H 4H	10.7	11.5	11.1	11.9	12.4	10.4	11.3	10.9	11.7	12.1
6H	11.4	12.2	11.9	12.6	13.1	11.1	11.8	11.6	12.3	12.7
8H	11.7	12.4	12.2	12.8	13.3	11.3	12.0	11.8	12.4	12.9
12H	12.0	12.6	12.5	13.1	13.6	11.5	12.1	12.0	12.6	13.1
12H 4H	10.7	11.5	11.1	11.9	12.3	10.4	11.3	10.9	11.7	12.1
6H	11.5	12.1	11.9	12.6	13.1	11.1	11.8	11.6	12.2	12.7
8H	11.8	12.4	12.3	12.8	13.4	11.4	12.0	11.9	12.4	12.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117 Corrected 864.2 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.5)

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	4	3	3	4	3	3	4	3	3	2
0.80	5	4	3	5	4	3	5	4	3	3
1.00	5	5	4	5	4	4	5	5	4	3
1.25	6	5	5	6	5	4	6	5	4	4
1.50	6	5	5	6	5	5	6	5	5	4
2.00	7	6	6	7	6	6	6	6	5	5
2.50	7	6	6	7	6	6	7	6	6	5
3.00	7	7	6	7	7	6	7	6	6	5
4.00	8	7	7	7	7	7	7	7	6	6
5.00	8	7	7	8	7	7	7	7	7	6
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

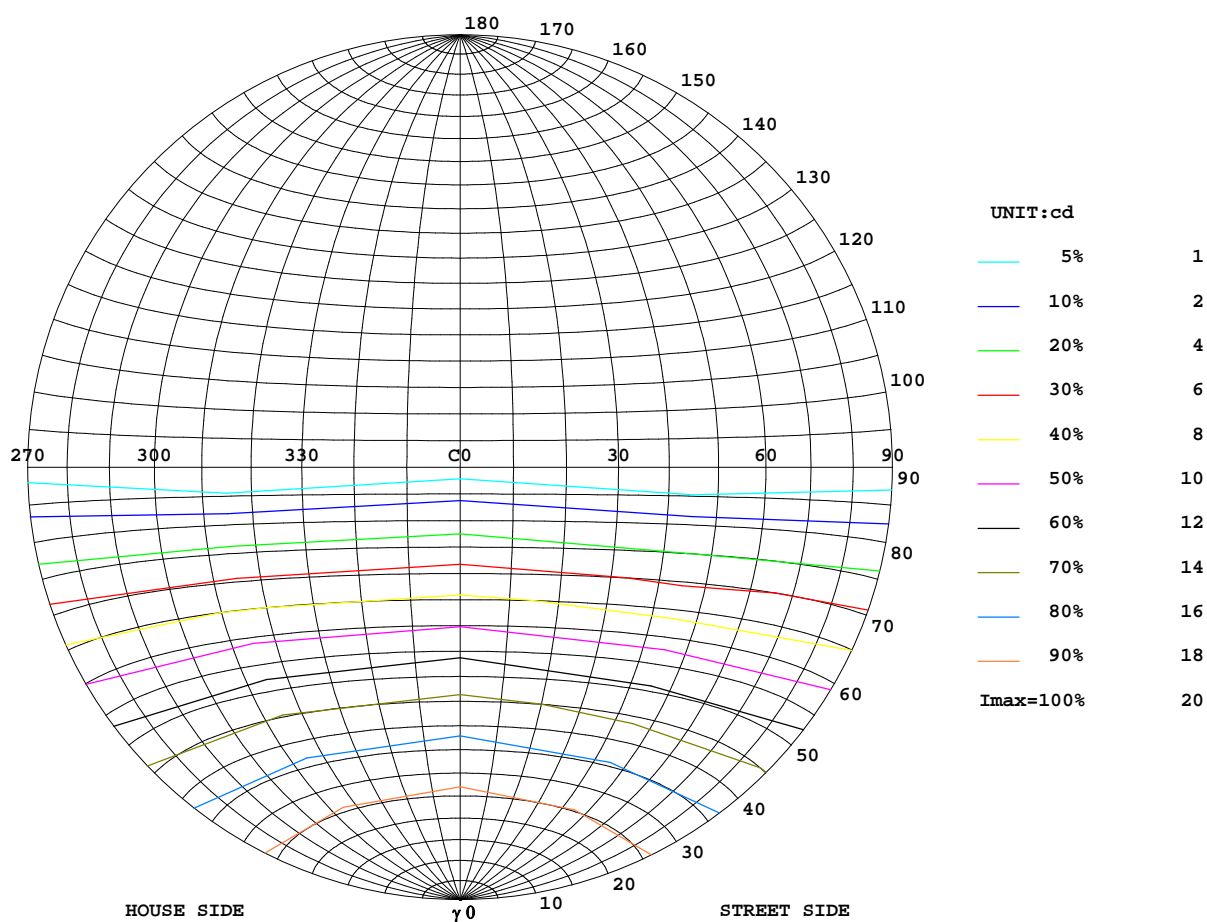

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日



Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

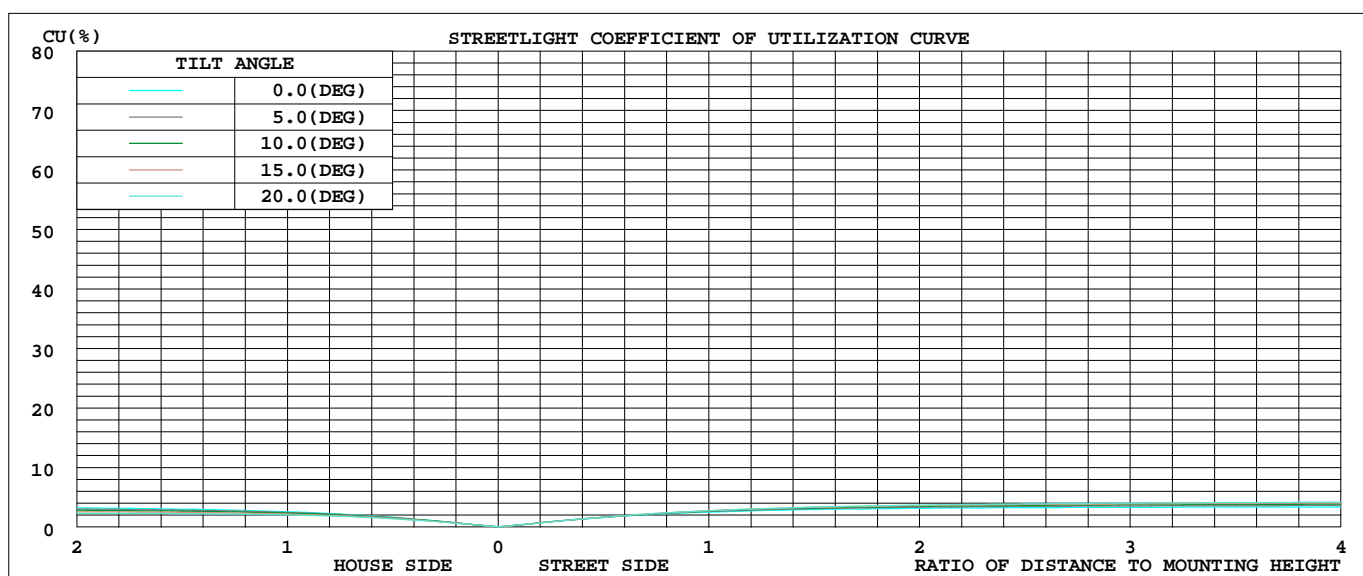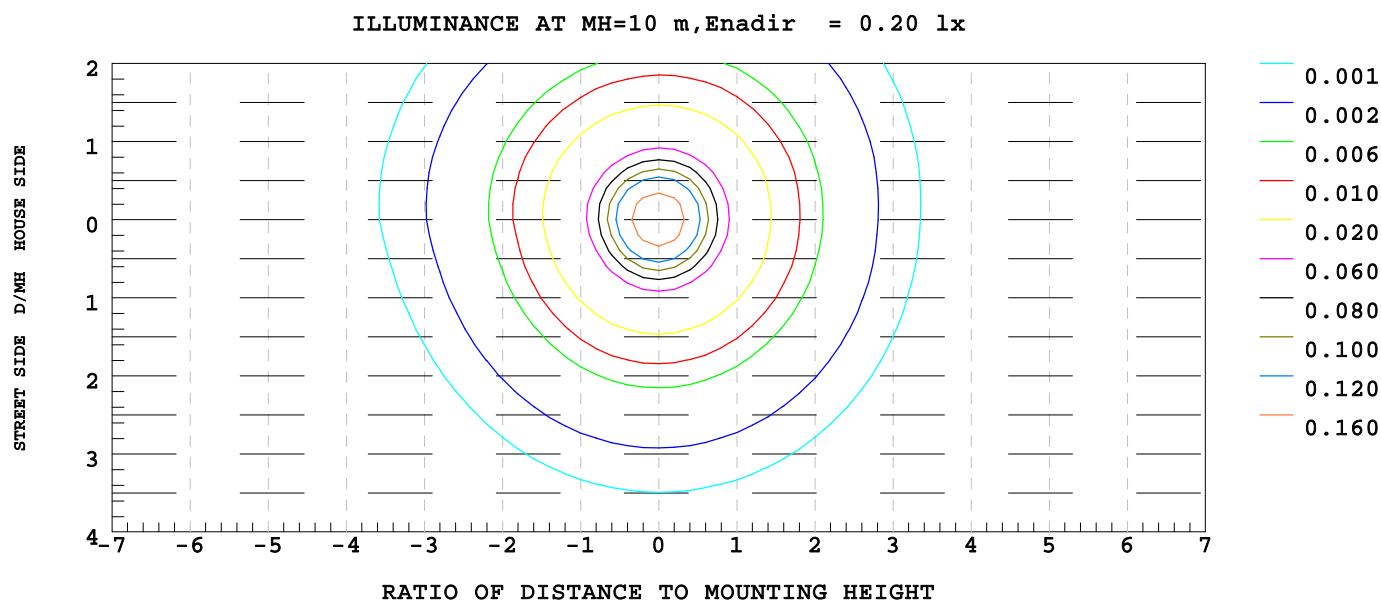


Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 3000K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

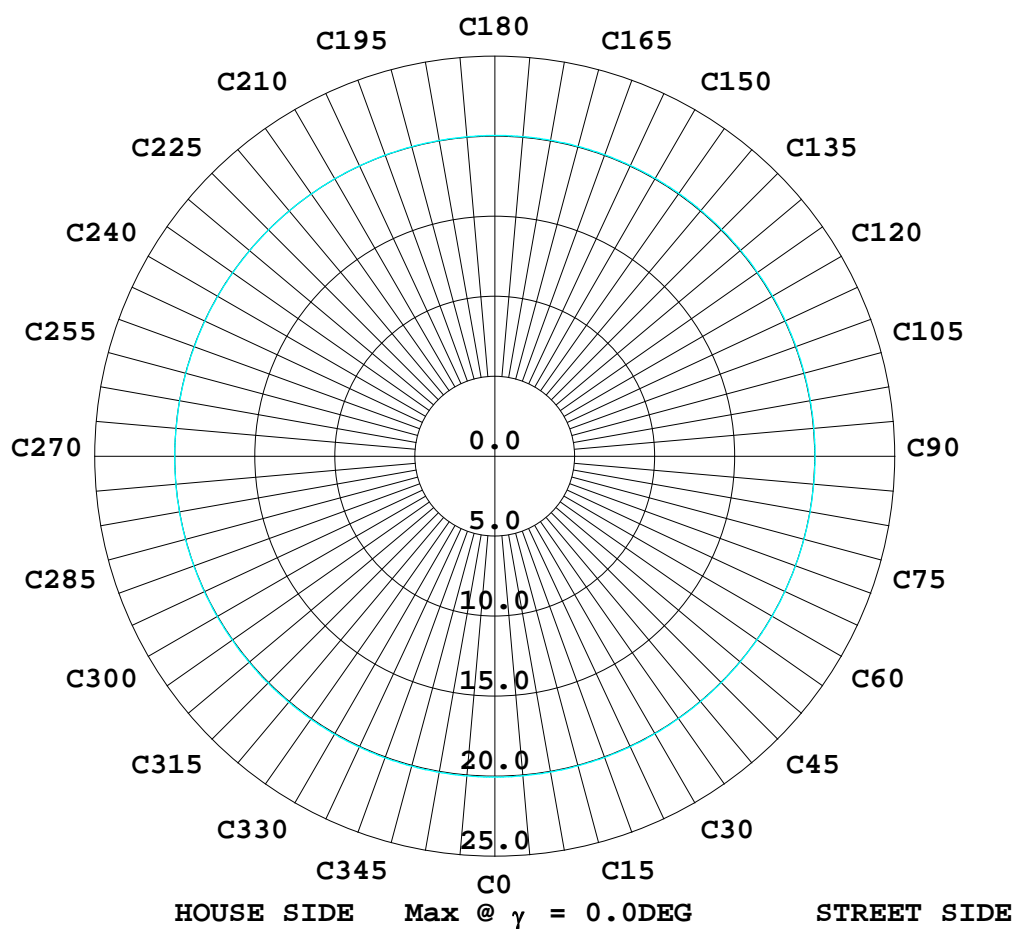

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:
SPECIFICATION:3000K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315
0.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
5.0	19.9	19.9	20.0	19.8	19.8	19.9	20.0	19.9
10.0	19.6	19.7	19.8	19.6	19.6	19.8	19.7	19.7
15.0	19.4	19.2	19.4	19.2	19.1	19.3	19.2	19.5
20.0	18.8	18.8	18.9	18.4	18.4	18.8	18.8	19.0
25.0	18.3	18.0	18.2	17.9	17.8	18.4	18.2	18.4
30.0	17.5	17.2	17.5	17.0	17.0	17.4	17.2	17.6
35.0	16.6	16.2	16.4	16.0	16.0	16.6	16.4	16.6
40.0	15.5	15.0	15.4	14.9	14.9	15.6	15.2	15.6
45.0	14.3	13.6	14.0	13.7	13.7	14.3	14.1	14.3
50.0	13.1	12.3	12.8	12.3	12.3	13.0	12.7	13.1
55.0	11.6	10.9	11.3	10.7	10.7	11.4	11.1	11.6
60.0	9.94	9.26	9.70	9.14	9.18	9.98	9.70	10.1
65.0	8.30	7.42	7.98	7.38	7.26	8.26	7.98	8.34
70.0	6.63	5.79	6.27	5.71	5.43	6.59	6.23	6.63
75.0	4.87	3.99	4.39	3.99	3.67	4.67	4.47	4.79
80.0	3.11	2.39	2.67	2.31	1.99	3.03	2.59	3.19
85.0	1.63	1.03	1.31	0.96	0.64	1.51	1.07	1.63
90.0	0.52	0.20	0.52	0.24	0.08	0.64	0.28	0.76
95.0	0.40	0.00	0.32	0.12	0.08	0.24	0.00	0.40
100.0	0.36	0.04	0.40	0.08	0.00	0.32	0.00	0.24
105.0	0.24	0.16	0.12	0.04	0.12	0.36	0.00	0.28
110.0	0.28	0.04	0.24	0.00	0.12	0.28	0.04	0.28
115.0	0.24	0.00	0.28	0.08	0.20	0.20	0.00	0.36
120.0	0.36	0.04	0.24	0.16	0.08	0.28	0.12	0.20
125.0	0.20	0.08	0.24	0.12	0.12	0.16	0.16	0.12
130.0	0.28	0.08	0.16	0.08	0.20	0.20	0.12	0.20
135.0	0.16	0.16	0.20	0.08	0.12	0.16	0.08	0.16
140.0	0.16	0.08	0.24	0.12	0.12	0.20	0.04	0.04
145.0	0.16	0.04	0.20	0.00	0.00	0.12	0.00	0.20
150.0	0.08	0.04	0.20	0.12	0.16	0.20	0.12	0.32
155.0	0.16	0.08	0.24	0.12	0.08	0.16	0.04	0.12
160.0	0.12	0.16	0.08	0.04	0.08	0.12	0.08	0.08
165.0	0.28	0.24	0.20	0.12	0.12	0.08	0.12	0.12
170.0	0.20	0.04	0.16	0.08	0.20	0.08	0.16	0.16
175.0	0.12	0.04	0.20	0.08	0.04	0.12	0.04	0.12
180.0	0.16	0.12	0.16	0.08	0.20	0.04	0.08	0.08

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks: