

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:	
SPECIFICATION:2400K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试	

DATA OF LAMP		I _{max} (cd)	7.828	S/MH(C0/180)	1.32
MODEL	2216	EFFICIENCY(%)	100.0	S/MH(C90/270)	1.27
NOMINAL POWER(W)	0	TOTAL FLUX(lm)	23.991	Voltage(V)	9.820
RATED VOLTAGE(V)	10	EFFICIENCY(lm/W)	72.7	Current(A)	0.046
NOMINAL FLUX(lm)	23.991	η up(%)	0.1	Power(W)	0.330
LAMPS QUANTITY	1	η down(%)	2.7	Power Factor(PF)	0.722
TEST VOLTAGE(V)	9.8	Effective Flux(lm)	0.0	EEI	0.000

LUMINOUS INTENSITY DISTRIBUTION

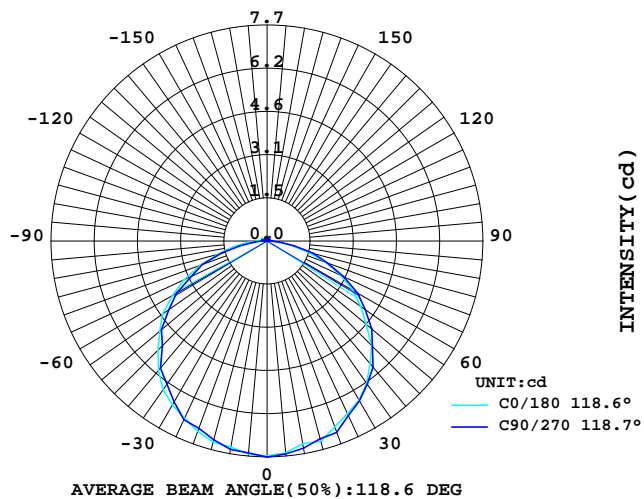

LUMINOUS INTENSITY DISTRIBUTION

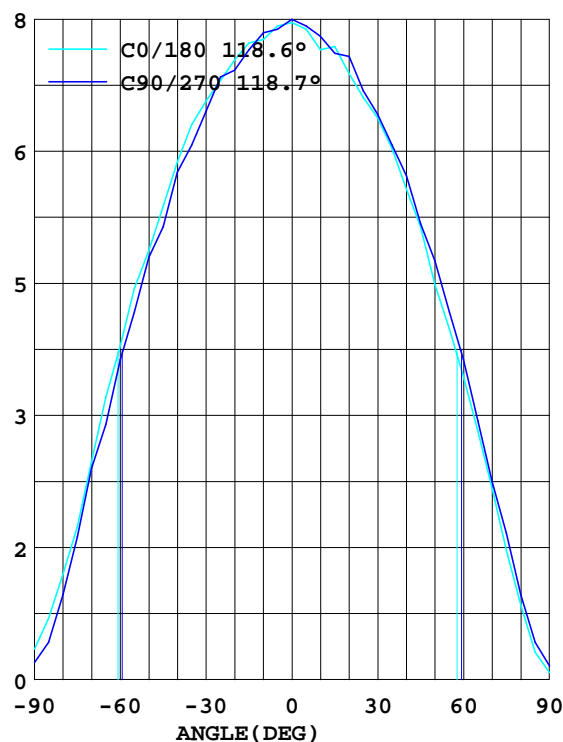

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

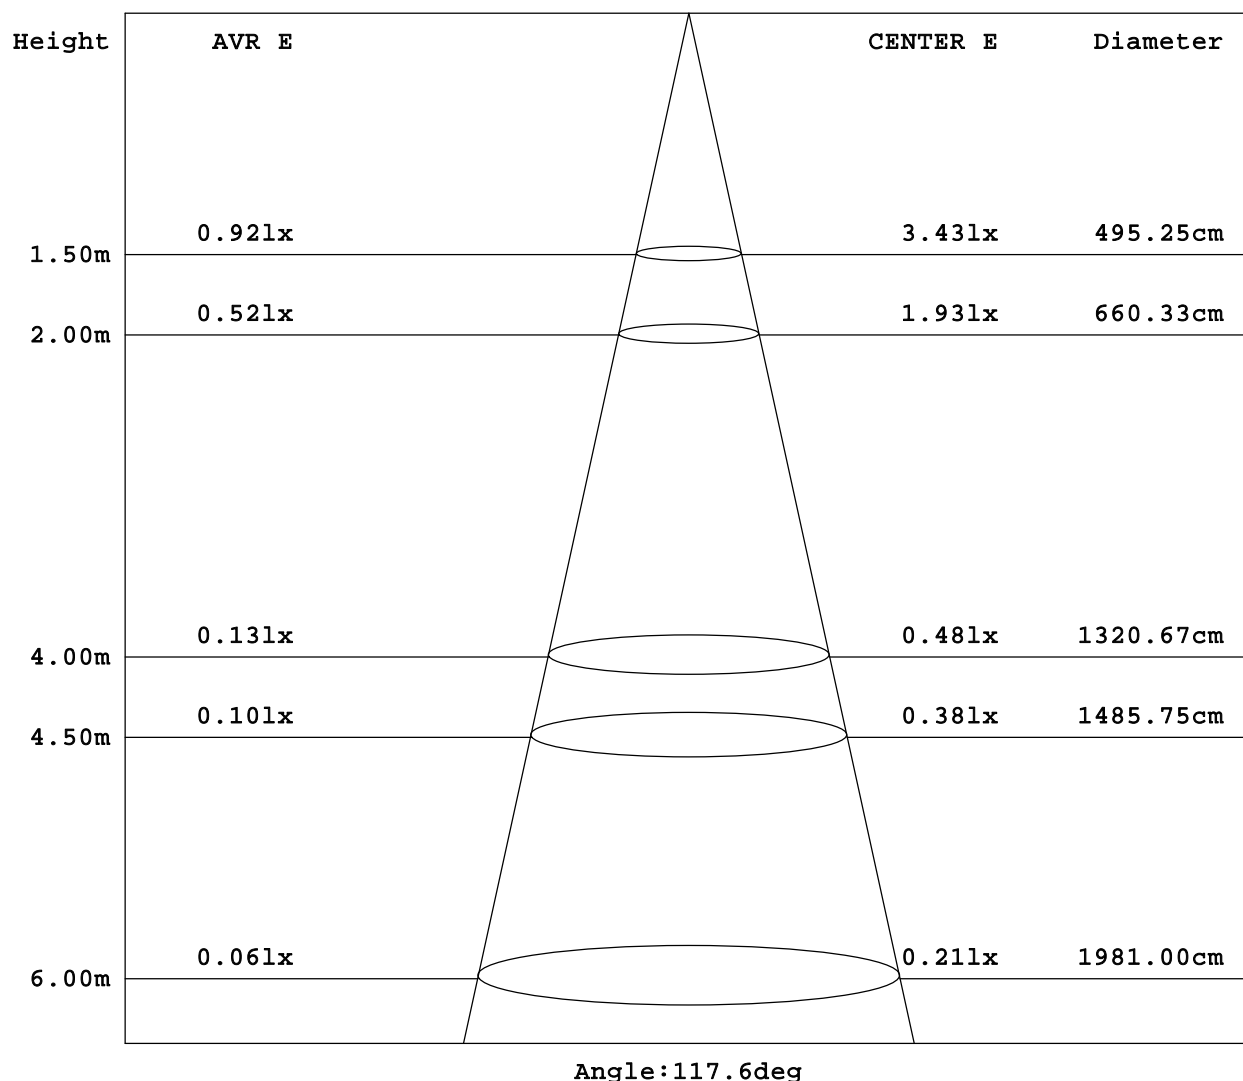

Test System: HOP00 HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	zone	total
10.0	7.509	7.509	7.589	7.469	7.389	7.549	7.549	7.708	0- 10	0.728	0.728
20.0	7.269	7.109	7.149	7.189	7.109	7.189	7.309	7.269	10- 20	2.088	2.816
30.0	6.790	6.590	6.670	6.510	6.590	6.630	6.630	6.830	20- 30	3.217	6.033
40.0	6.071	5.751	5.951	5.791	5.751	5.951	5.911	5.991	30- 40	3.938	9.971
50.0	5.032	4.833	4.952	4.753	4.633	5.032	4.912	5.032	40- 50	4.154	14.12
60.0	3.914	3.674	3.754	3.514	3.554	3.834	3.754	3.874	50- 60	3.876	18.00
70.0	2.556	2.196	2.476	2.156	2.236	2.556	2.316	2.436	60- 70	3.028	21.03
80.0	1.238	0.919	0.999	0.959	0.879	1.038	0.999	1.238	70- 80	1.787	22.81
90.0	0.359	0.080	0.200	0	0.080	0.240	0.160	0.240	80- 90	0.586	23.40
100.0	0.200	0.200	0.200	0	0	0.120	0	0.080	90-100	0.144	23.54
110.0	0.200	0.120	0.120	0.120	0	0.160	0.080	0.160	100-110	0.103	23.65
120.0	0.080	0	0.120	0.120	0.080	0.120	0.120	0.040	110-120	0.101	23.75
130.0	0.080	0.160	0.040	0	0.160	0.080	0	0	120-130	0.065	23.81
140.0	0.120	0.040	0.040	0.040	0.080	0.120	0.080	0.080	130-140	0.039	23.85
150.0	0.160	0	0.080	0.040	0.040	0.120	0.080	0.040	140-150	0.053	23.90
160.0	0.040	0.160	0.040	0.080	0.160	0.080	0.120	0.080	150-160	0.041	23.94
170.0	0.160	0.040	0.040	0.040	0.080	0.120	0.040	0.160	160-170	0.026	23.97
180.0	0.040	0.040	0.120	0.040	0	0	0.080	0.080	170-180	0.008	23.98
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:	
SPECIFICATION:2400K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

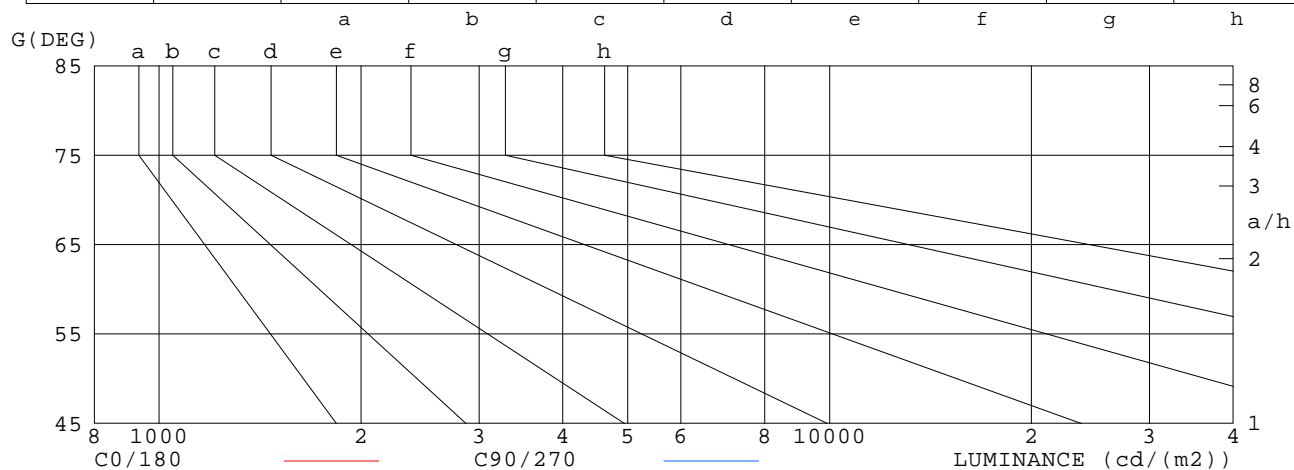

LUMINANCE cd/(m ²)		
G (DEG)	C0/180	C90/270
85	82	50
80	71	58
75	69	65
70	75	72
65	78	71
60	78	75
55	80	75
50	78	77
45	79	75


Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

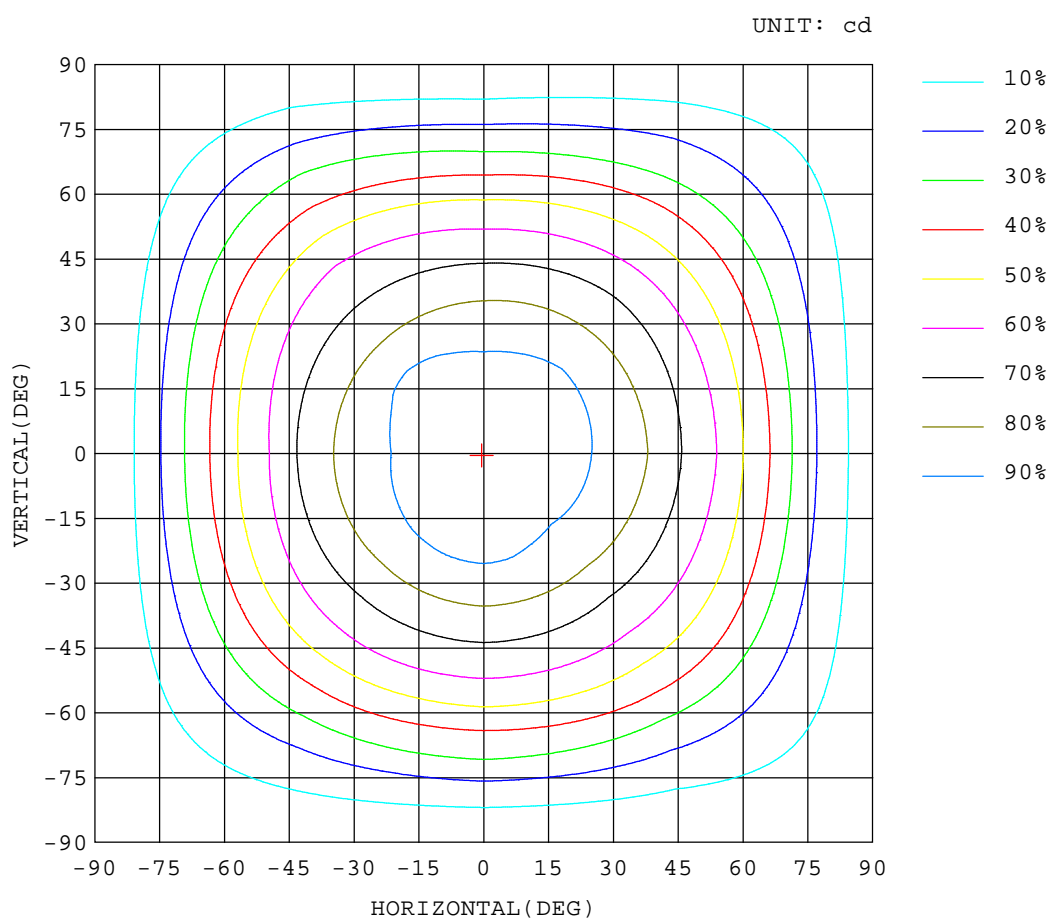

Test System: HOP00 HPG1800
Temperature: 25.3 DEG
Operators:
Test Date: 2019年09月16日


Test Set: 8.0 deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

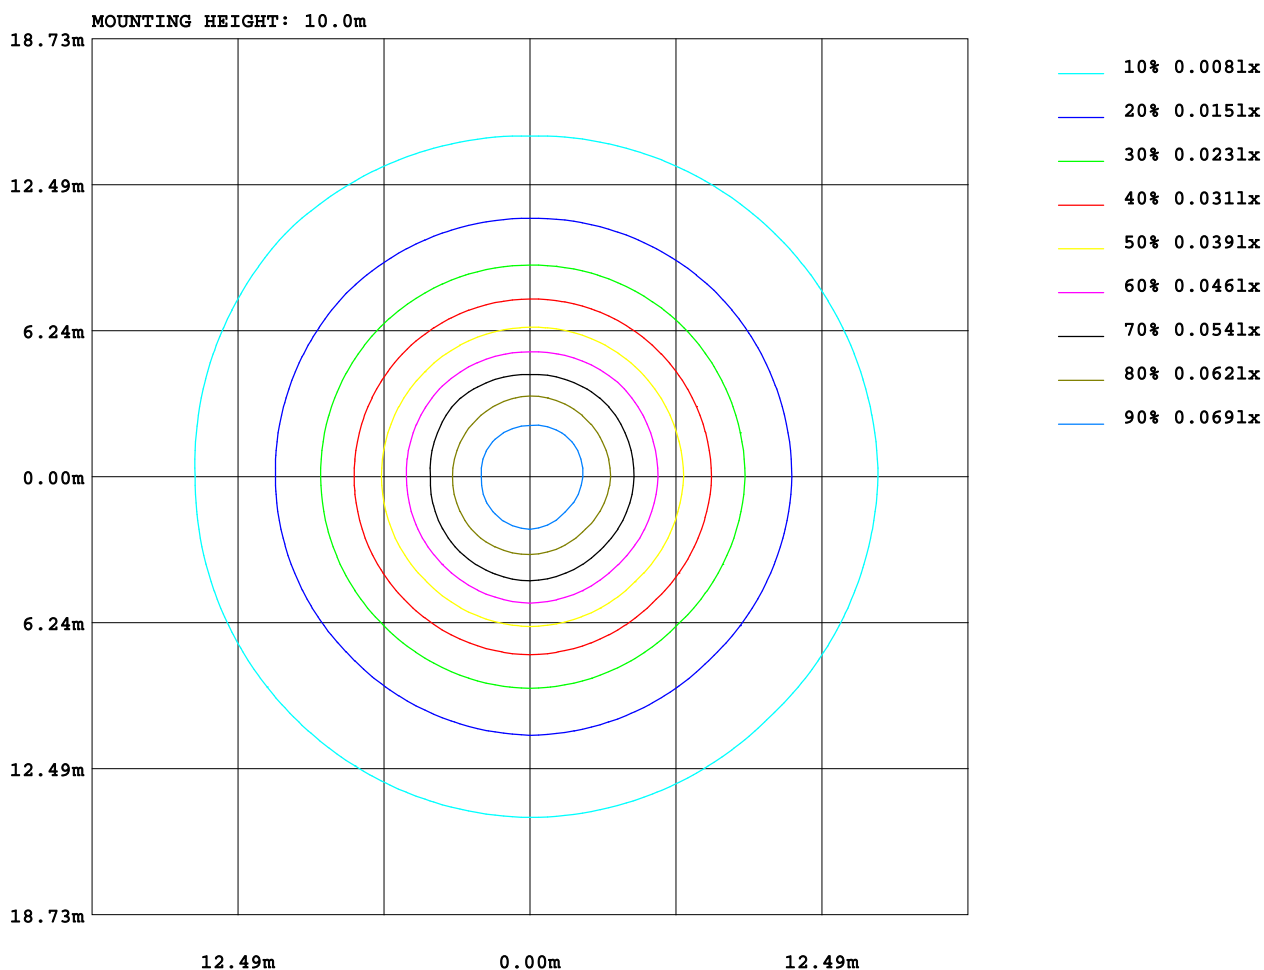

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a		
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.17	0.04		
90	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.48	0.45		
80	0.00	0.00	0.01	0.03	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.83	0.83		
70	0.00	0.01	0.02	0.04	0.06	0.09	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.04	0.02	0.01	0.00	1.18	1.17		
60	0.00	0.01	0.03	0.05	0.08	0.11	0.14	0.15	0.16	0.16	0.15	0.14	0.11	0.08	0.05	0.03	0.01	0.00	1.47	1.47		
50	0.00	0.01	0.03	0.06	0.09	0.13	0.16	0.18	0.19	0.19	0.18	0.16	0.13	0.10	0.06	0.03	0.01	0.00	1.71	1.71		
40	0.00	0.01	0.03	0.07	0.10	0.14	0.17	0.20	0.21	0.21	0.20	0.18	0.14	0.11	0.07	0.04	0.01	0.00	1.90	1.90		
30	0.00	0.01	0.04	0.07	0.11	0.15	0.18	0.21	0.22	0.22	0.21	0.19	0.16	0.12	0.08	0.04	0.01	0.00	2.02	2.02		
	0.00	0.01	0.04	0.07	0.11	0.15	0.19	0.21	0.23	0.23	0.22	0.19	0.16	0.12	0.08	0.04	0.02	0.00	2.08	2.08		
	0.00	0.01	0.04	0.07	0.11	0.15	0.19	0.22	0.23	0.23	0.22	0.19	0.16	0.12	0.08	0.04	0.01	0.00	2.07	2.07		
	0.00	0.01	0.04	0.07	0.11	0.15	0.18	0.21	0.22	0.22	0.21	0.19	0.15	0.11	0.08	0.04	0.01	0.00	2.00	2.00		
-30	0.00	0.01	0.03	0.06	0.10	0.14	0.17	0.20	0.21	0.21	0.20	0.17	0.14	0.11	0.07	0.04	0.01	0.00	1.87	1.87		
-40	0.00	0.01	0.03	0.06	0.09	0.12	0.15	0.18	0.19	0.19	0.18	0.15	0.13	0.09	0.06	0.03	0.01	0.00	1.67	1.67		
-50	0.00	0.01	0.02	0.05	0.08	0.11	0.13	0.15	0.16	0.16	0.15	0.13	0.11	0.08	0.05	0.03	0.01	0.00	1.42	1.42		
-60	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.13	0.13	0.12	0.11	0.08	0.06	0.04	0.02	0.01	0.00	1.12	1.12		
-70	0.00	0.00	0.01	0.02	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.78	0.77		
-80	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.42	0.39		
-90	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.13	0.02		
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)						20	30	40	50	60	70	80	90
Φ t	0.02	0.14	0.41	0.80	1.25	1.72	2.13	2.43	2.60	2.60	2.45	2.16	1.77	1.31	0.87	0.47	0.17	0.03	24			
Φ a	0.00	0.11	0.39	0.78	1.24	1.70	2.11	2.41	2.58	2.58	2.43	2.14	1.75	1.30	0.85	0.45	0.15	0.01		23		

Test System: HOPPO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 6.320 m
 Remarks:


LEDWISE TECHNOLOGY LIMITED TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:	Address:				
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条			WEIGHT:	
SPECIFICATION:2400K	DIMENSION: 10MM*2FT			SERIAL No.:带调光测试	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03
1.0	.03	.03	.03	.03	.03	.03	.03	.03	.02	.03	.02	.02	.02	.02	.02	.02
2.0	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
3.0	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02	.02
4.0	.02	.02	.01	.02	.02	.01	.02	.02	.01	.02	.02	.01	.02	.01	.01	.01
5.0	.02	.01	.01	.02	.01	.01	.02	.01	.01	.02	.01	.01	.01	.01	.01	.01
6.0	.02	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
7.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
8.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
9.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01
10.0	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01	.01

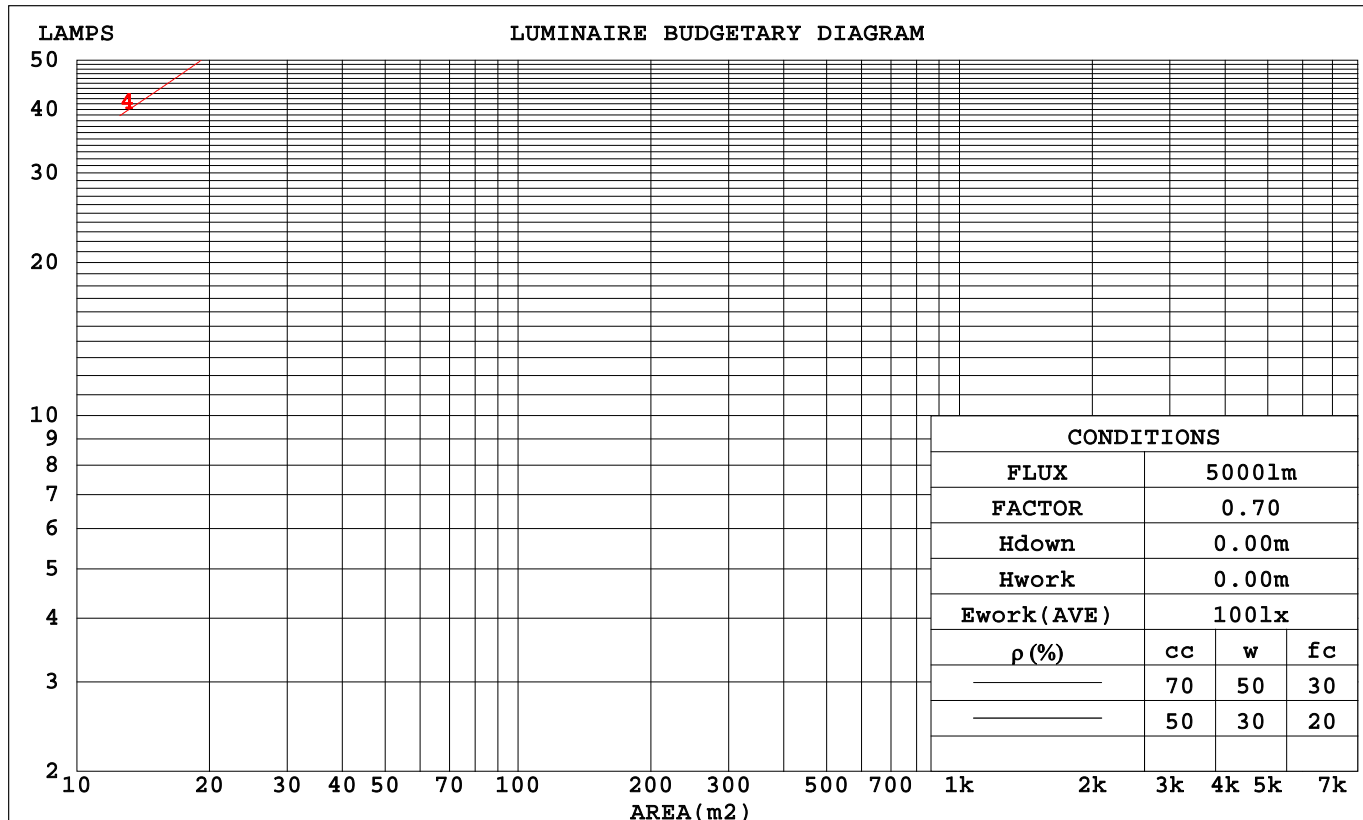

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

WEC AND CCEC

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.009	.005	.002	.009	.005	.002	.008	.005	.002	.008	.005	.001	.008	.004	.001															
2.0	.008	.005	.001	.008	.004	.001	.008	.004	.001	.007	.004	.001	.007	.004	.001															
3.0	.008	.004	.001	.007	.004	.001	.007	.004	.001	.007	.004	.001	.007	.004	.001															
4.0	.007	.004	.001	.007	.004	.001	.007	.003	.001	.006	.003	.001	.006	.003	.001															
5.0	.006	.003	.001	.006	.003	.001	.006	.003	.001	.006	.003	.001	.006	.003	.001															
6.0	.006	.003	.001	.006	.003	.001	.006	.003	.001	.005	.003	.001	.005	.003	.001															
7.0	.006	.003	.001	.005	.003	.001	.005	.003	.001	.005	.003	.001	.005	.003	.001															
8.0	.005	.003	.001	.005	.003	.001	.005	.002	.001	.005	.002	.001	.005	.002	.001															
9.0	.005	.002	.001	.005	.002	.001	.005	.002	.001	.004	.002	.001	.004	.002	.001															
10.0	.005	.002	.001	.004	.002	.001	.004	.002	.001	.004	.002	.001	.004	.002	.001															

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.006	.006	.006	.005	.005	.005	.003	.003	.003	.002	.002	.002	.001	.001	.001		
1.0	.006	.005	.004	.005	.004	.004	.003	.003	.003	.002	.002	.001	.001	.001	.000		
2.0	.005	.004	.003	.005	.004	.003	.003	.002	.002	.002	.001	.001	.001	.000	.000		
3.0	.005	.004	.003	.004	.003	.002	.003	.002	.002	.002	.001	.001	.001	.000	.000		
4.0	.005	.003	.002	.004	.003	.002	.003	.002	.001	.002	.001	.001	.001	.000	.000		
5.0	.005	.003	.002	.004	.003	.002	.003	.002	.001	.002	.001	.001	.001	.000	.000		
6.0	.004	.003	.002	.004	.002	.001	.003	.002	.001	.002	.001	.001	.000	.000	.000		
7.0	.004	.003	.001	.004	.002	.001	.003	.002	.001	.001	.001	.001	.000	.000	.000		
8.0	.004	.002	.001	.004	.002	.001	.002	.001	.001	.001	.001	.000	.000	.000	.000		
9.0	.004	.002	.001	.003	.002	.001	.002	.001	.001	.001	.001	.000	.000	.000	.000		
10.0	.004	.002	.001	.003	.002	.001	.002	.001	.001	.001	.001	.000	.000	.000	.000		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

Uncorrected UGR Table

Report number:

MANUFACTURER:						Address:					
NAME: LTR-S-DTW-24V-3.0W-16						TYPE:软光条			WEIGHT:		
SPECIFICATION:2400K						DIMENSION: 10MM*2FT			SERIAL No.:带调光测试		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.1	5.6	4.4	5.8	6.1	3.8	5.3	4.1	5.5	5.8	
	3H	5.6	7.0	6.0	7.3	7.6	5.4	6.8	5.8	7.1	7.4
	4H	6.3	7.6	6.6	7.9	8.2	6.0	7.4	6.4	7.6	8.0
	6H	6.8	8.1	7.2	8.4	8.7	6.4	7.7	6.8	8.0	8.3
	8H	7.0	8.2	7.4	8.5	8.9	6.5	7.7	6.8	8.0	8.4
	12H	7.2	8.3	7.6	8.7	9.0	6.5	7.7	6.9	8.0	8.4
4H	2H	4.6	5.9	5.0	6.2	6.5	4.4	5.7	4.7	6.0	6.3
	3H	6.3	7.5	6.7	7.8	8.2	6.2	7.3	6.6	7.7	8.0
	4H	7.1	8.2	7.5	8.5	8.9	6.9	7.9	7.3	8.3	8.7
	6H	7.7	8.7	8.2	9.1	9.5	7.4	8.3	7.8	8.7	9.1
	8H	8.0	8.9	8.4	9.3	9.7	7.5	8.4	7.9	8.8	9.2
	12H	8.2	9.0	8.7	9.5	9.9	7.6	8.4	8.0	8.8	9.3
8H	4H	7.3	8.2	7.7	8.6	9.0	7.1	8.0	7.6	8.4	8.8
	6H	8.1	8.8	8.6	9.3	9.7	7.7	8.4	8.2	8.9	9.4
	8H	8.4	9.0	8.9	9.5	10.0	7.9	8.5	8.4	9.0	9.5
	12H	8.7	9.3	9.2	9.8	10.3	8.0	8.6	8.5	9.1	9.6
12H	4H	7.3	8.1	7.8	8.5	9.0	7.1	7.9	7.6	8.3	8.8
	6H	8.1	8.7	8.6	9.2	9.7	7.7	8.4	8.2	8.9	9.4
	8H	8.4	9.0	9.0	9.5	10.0	7.9	8.5	8.4	9.0	9.5
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.0 / - 0.1					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.5					

CIE Pub.117 Corrected 864.2 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.5)

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	2	1	1	2	1	1	1	1	1	1
0.80	2	1	1	2	1	1	2	1	1	1
1.00	2	2	2	2	2	2	2	2	2	1
1.25	2	2	2	2	2	2	2	2	2	1
1.50	2	2	2	2	2	2	2	2	2	2
2.00	3	2	2	3	2	2	2	2	2	2
2.50	3	2	2	3	2	2	3	2	2	2
3.00	3	3	2	3	3	2	3	2	2	2
4.00	3	3	3	3	3	3	3	3	2	2
5.00	3	3	3	3	3	3	3	3	3	2
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

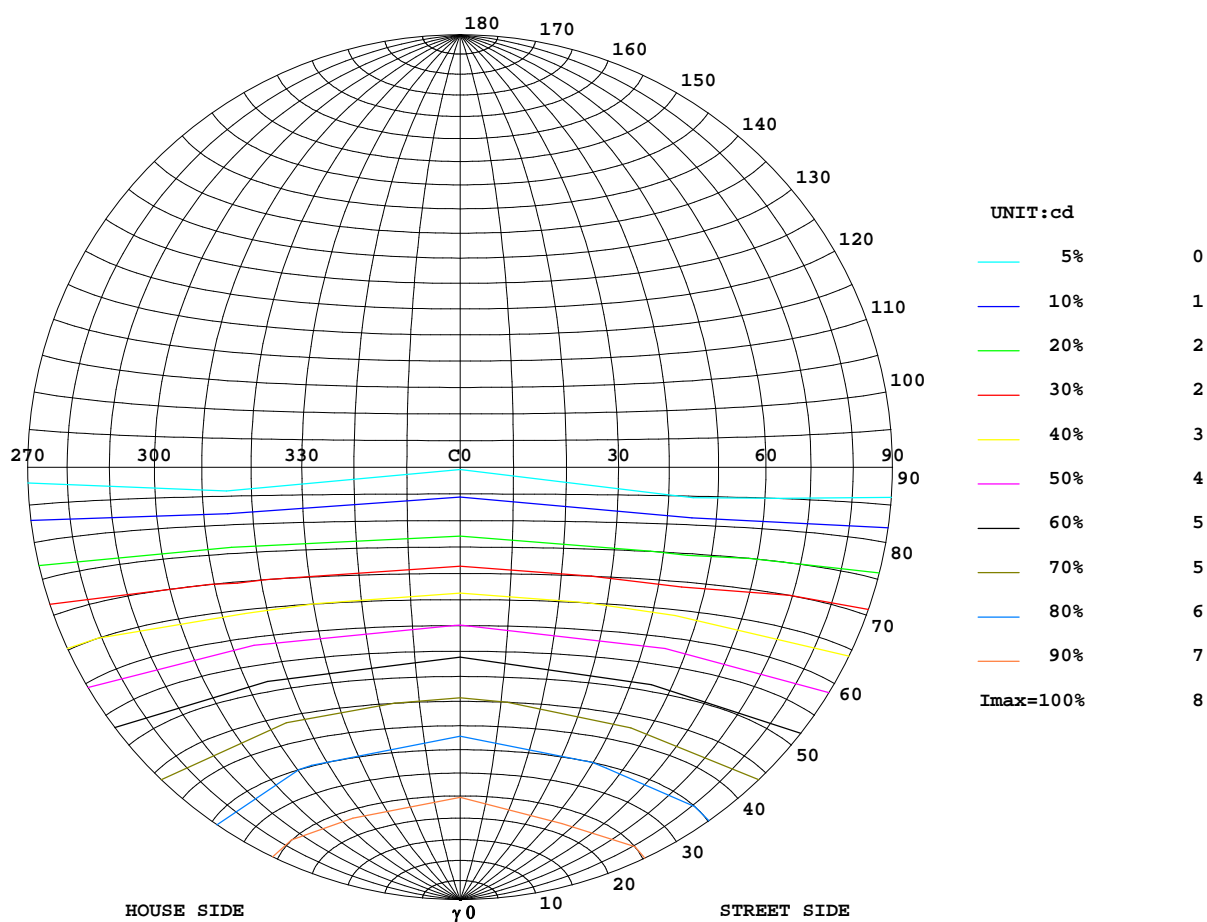

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日



Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

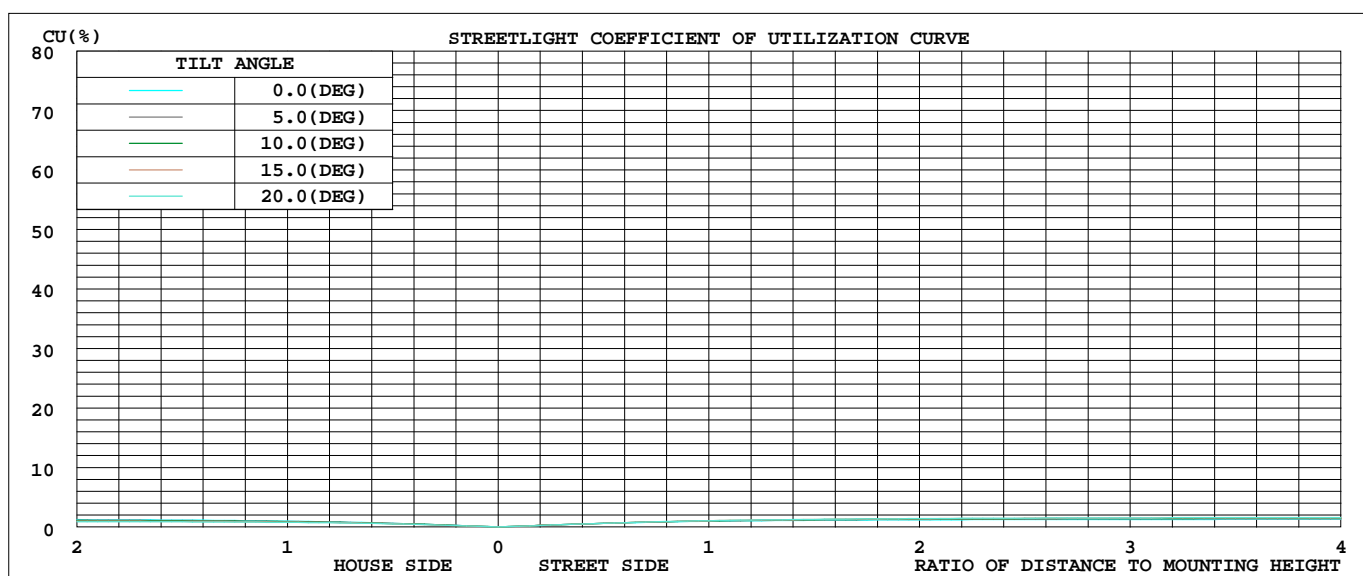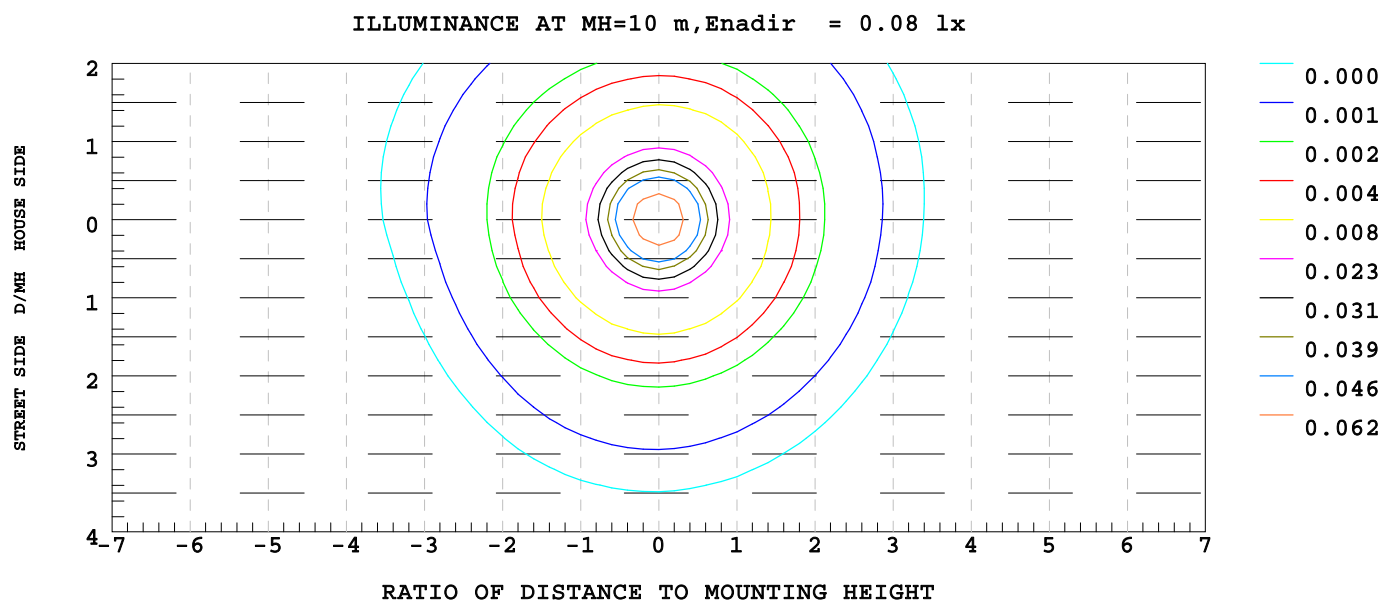


Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2400K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

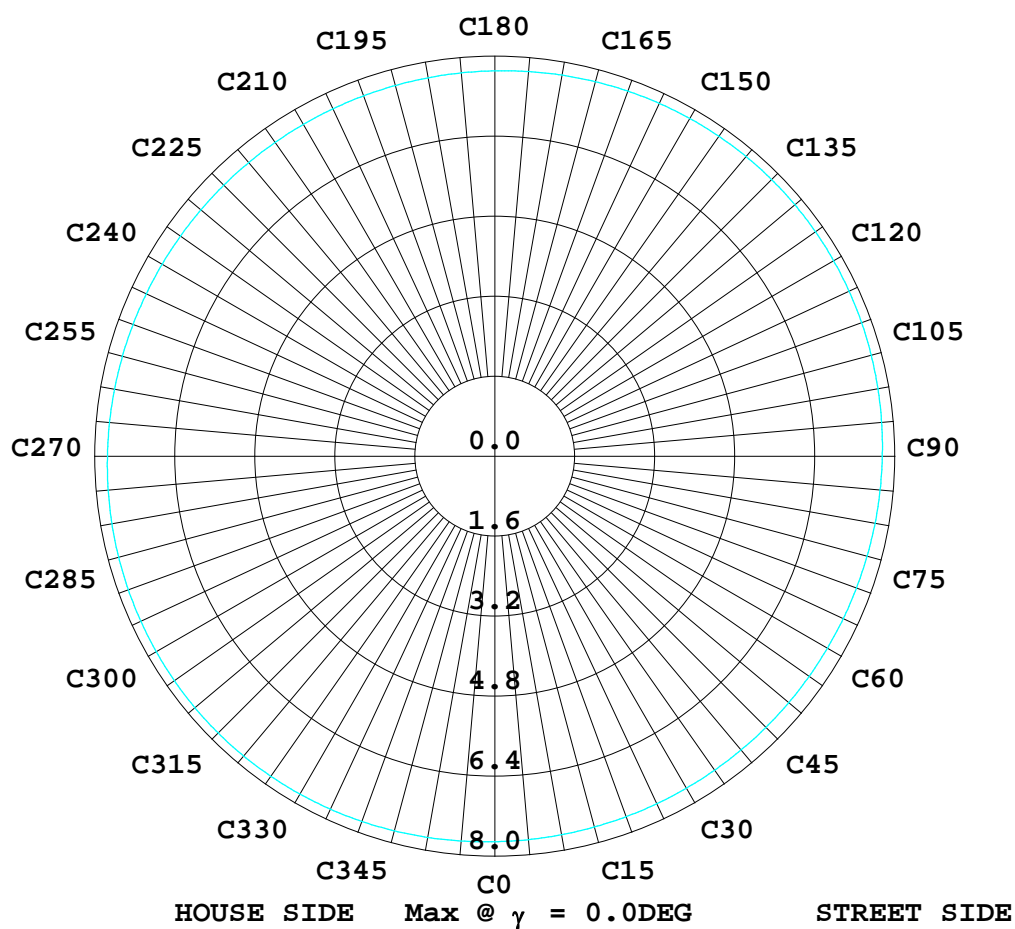

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:
SPECIFICATION:2400K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315
0.0	7.70	7.66	7.74	7.82	7.70	7.66	7.74	7.82
5.0	7.66	7.62	7.62	7.70	7.62	7.70	7.66	7.66
10.0	7.50	7.50	7.58	7.46	7.38	7.54	7.54	7.70
15.0	7.46	7.30	7.38	7.42	7.42	7.34	7.34	7.42
20.0	7.26	7.10	7.14	7.18	7.10	7.18	7.30	7.26
25.0	7.02	6.94	7.06	6.98	6.83	7.10	6.91	7.10
30.0	6.79	6.59	6.67	6.51	6.59	6.63	6.63	6.83
35.0	6.51	6.23	6.27	6.19	6.23	6.19	6.27	6.39
40.0	6.07	5.75	5.95	5.79	5.75	5.95	5.91	5.99
45.0	5.55	5.27	5.31	5.15	5.31	5.31	5.35	5.55
50.0	5.03	4.83	4.95	4.75	4.63	5.03	4.91	5.03
55.0	4.59	4.27	4.31	4.19	4.11	4.47	4.31	4.47
60.0	3.91	3.67	3.75	3.51	3.55	3.83	3.75	3.87
65.0	3.31	2.99	2.99	2.83	2.91	3.15	3.03	3.27
70.0	2.55	2.19	2.47	2.15	2.23	2.55	2.31	2.43
75.0	1.79	1.51	1.67	1.43	1.51	1.87	1.71	1.95
80.0	1.23	0.92	1.00	0.96	0.88	1.03	1.00	1.23
85.0	0.72	0.36	0.44	0.28	0.32	0.60	0.44	0.64
90.0	0.36	0.08	0.20	0.00	0.08	0.24	0.16	0.24
95.0	0.24	0.04	0.04	0.00	0.08	0.24	0.20	0.20
100.0	0.20	0.20	0.20	0.00	0.00	0.12	0.00	0.08
105.0	0.00	0.00	0.20	0.04	0.00	0.24	0.04	0.16
110.0	0.20	0.12	0.12	0.12	0.00	0.16	0.08	0.16
115.0	0.24	0.16	0.12	0.00	0.04	0.16	0.04	0.04
120.0	0.08	0.00	0.12	0.12	0.08	0.12	0.12	0.04
125.0	0.20	0.04	0.04	0.00	0.00	0.12	0.00	0.16
130.0	0.08	0.16	0.04	0.00	0.16	0.08	0.00	0.00
135.0	0.04	0.04	0.04	0.00	0.12	0.00	0.00	0.00
140.0	0.12	0.04	0.04	0.04	0.08	0.12	0.08	0.08
145.0	0.08	0.04	0.16	0.00	0.12	0.08	0.20	0.08
150.0	0.16	0.00	0.08	0.04	0.04	0.12	0.08	0.04
155.0	0.16	0.00	0.08	0.12	0.12	0.20	0.08	0.00
160.0	0.04	0.16	0.04	0.08	0.16	0.08	0.12	0.08
165.0	0.12	0.08	0.12	0.04	0.16	0.12	0.12	0.00
170.0	0.16	0.04	0.04	0.04	0.08	0.12	0.04	0.16
175.0	0.04	0.20	0.04	0.08	0.08	0.04	0.08	0.12
180.0	0.04	0.04	0.12	0.04	0.00	0.00	0.08	0.08

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks: