

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

DATA OF LAMP		Imax(cd)	12.70	S/MH(C0/180)	1.29
MODEL	2216	EFFICIENCY(%)	100.0	S/MH(C90/270)	1.29
NOMINAL POWER(W)	1	TOTAL FLUX(lm)	38.92	Voltage(V)	10.98
RATED VOLTAGE(V)	11	EFFICIENCY(lm/W)	69.5	Current(A)	0.067
NOMINAL FLUX(lm)	38.92	η up(%)	0.1	Power(W)	0.560
LAMPS QUANTITY	1	η down(%)	4.4	Power Factor(PF)	0.750
TEST VOLTAGE(V)	11.0	Effective Flux(lm)	0.0	EEI	0.000

LUMINOUS INTENSITY DISTRIBUTION

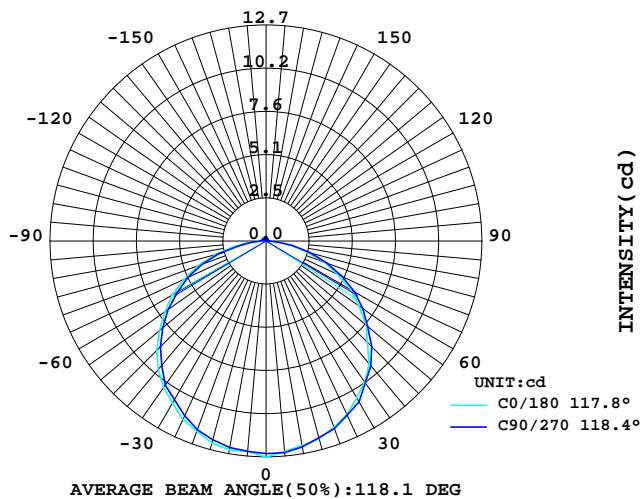

LUMINOUS INTENSITY DISTRIBUTION

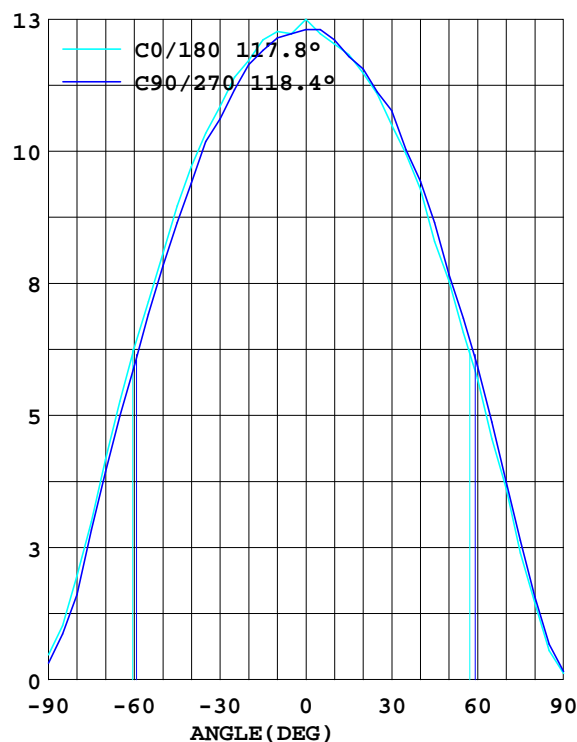

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

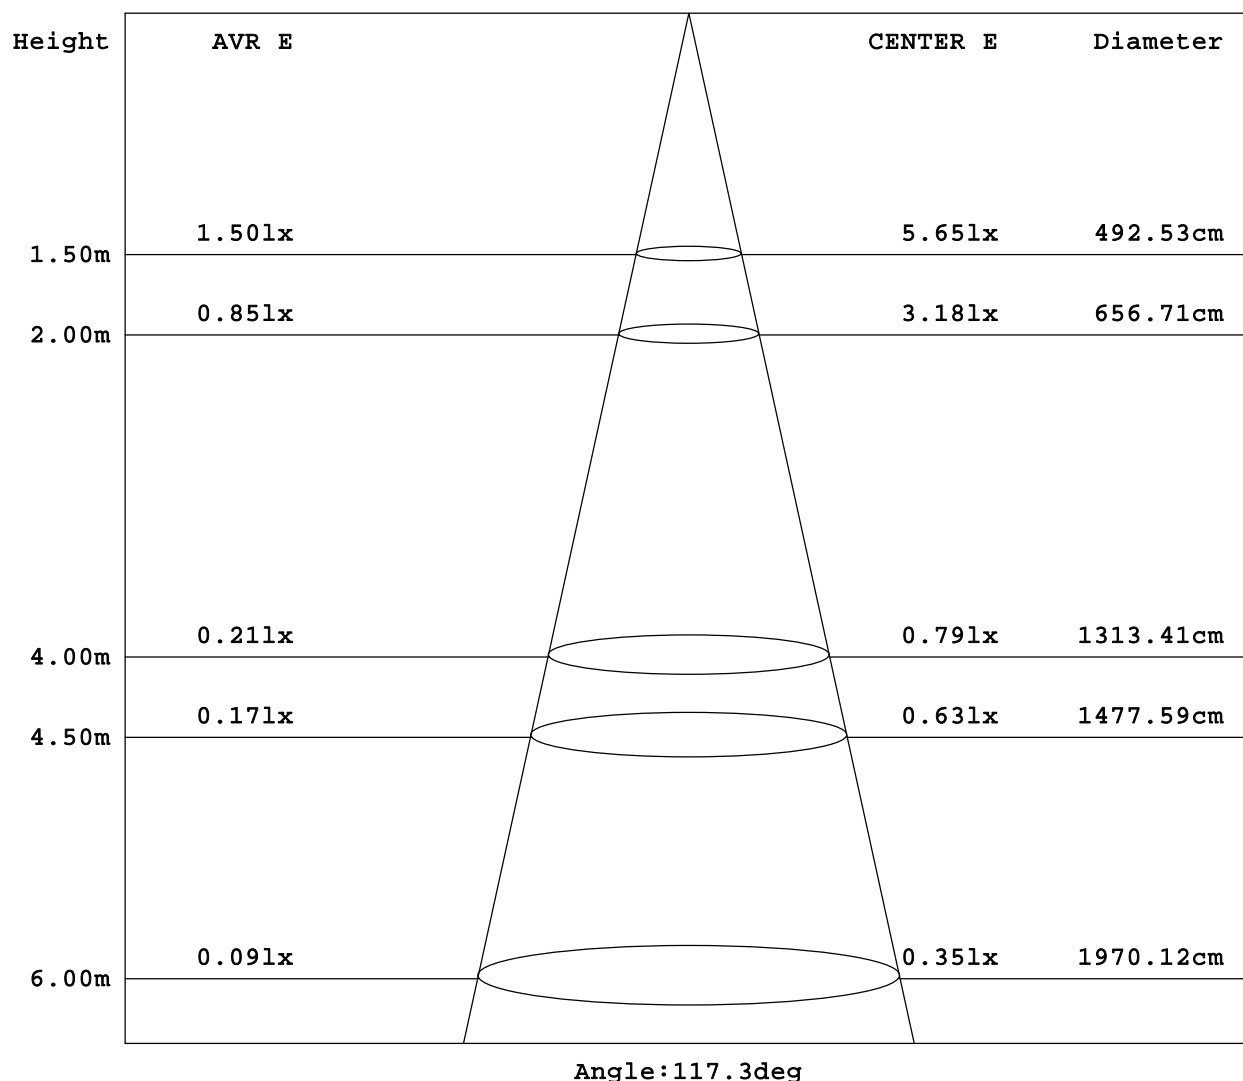

Test System: HOP00 HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	zone	total
10.0	12.46	12.46	12.34	12.22	12.22	12.46	12.30	12.30	0- 10	1.187	1.187
20.0	11.90	11.66	11.82	11.54	11.66	11.98	11.74	11.98	10- 20	3.417	4.604
30.0	11.02	10.70	10.78	10.54	10.66	10.94	10.94	11.06	20- 30	5.240	9.845
40.0	9.865	9.426	9.546	9.386	9.426	9.745	9.586	9.865	30- 40	6.411	16.25
50.0	8.188	7.748	7.948	7.668	7.668	8.068	7.788	8.228	40- 50	6.786	23.04
60.0	6.390	5.831	6.031	5.751	5.791	6.231	6.031	6.270	50- 60	6.261	29.30
70.0	4.233	3.674	3.994	3.594	3.674	4.114	3.794	4.154	60- 70	4.910	34.21
80.0	1.997	1.477	1.637	1.437	1.477	1.797	1.597	1.957	70- 80	2.907	37.12
90.0	0.479	0.040	0.320	0.120	0.120	0.359	0.160	0.399	80- 90	0.961	38.08
100.0	0.280	0	0.320	0.040	0.080	0.200	0.080	0.240	90-100	0.211	38.29
110.0	0.160	0	0.200	0.080	0.040	0.200	0.080	0.120	100-110	0.136	38.43
120.0	0.280	0.160	0.240	0	0.080	0.160	0.040	0.120	110-120	0.132	38.56
130.0	0.160	0	0.120	0.040	0.160	0.080	0.080	0.160	120-130	0.113	38.67
140.0	0.200	0.040	0.160	0.080	0.120	0.120	0.120	0.200	130-140	0.102	38.77
150.0	0.080	0.120	0	0	0.160	0.080	0.080	0	140-150	0.069	38.84
160.0	0.160	0.080	0.120	0	0.040	0.040	0.080	0.120	150-160	0.048	38.89
170.0	0.040	0.120	0	0.080	0.080	0.120	0.160	0.200	160-170	0.025	38.92
180.0	0	0.160	0.120	0.160	0.120	0	0.040	0.160	170-180	0.008	38.92
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

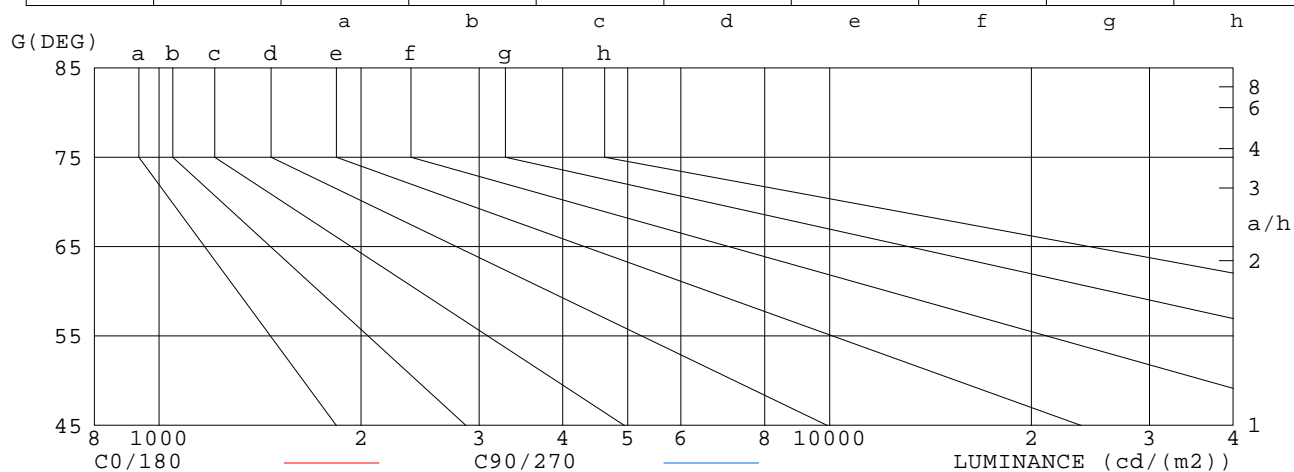

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	119	101
80	115	94
75	117	111
70	124	117
65	127	120
60	128	121
55	127	123
50	127	124
45	129	124


Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

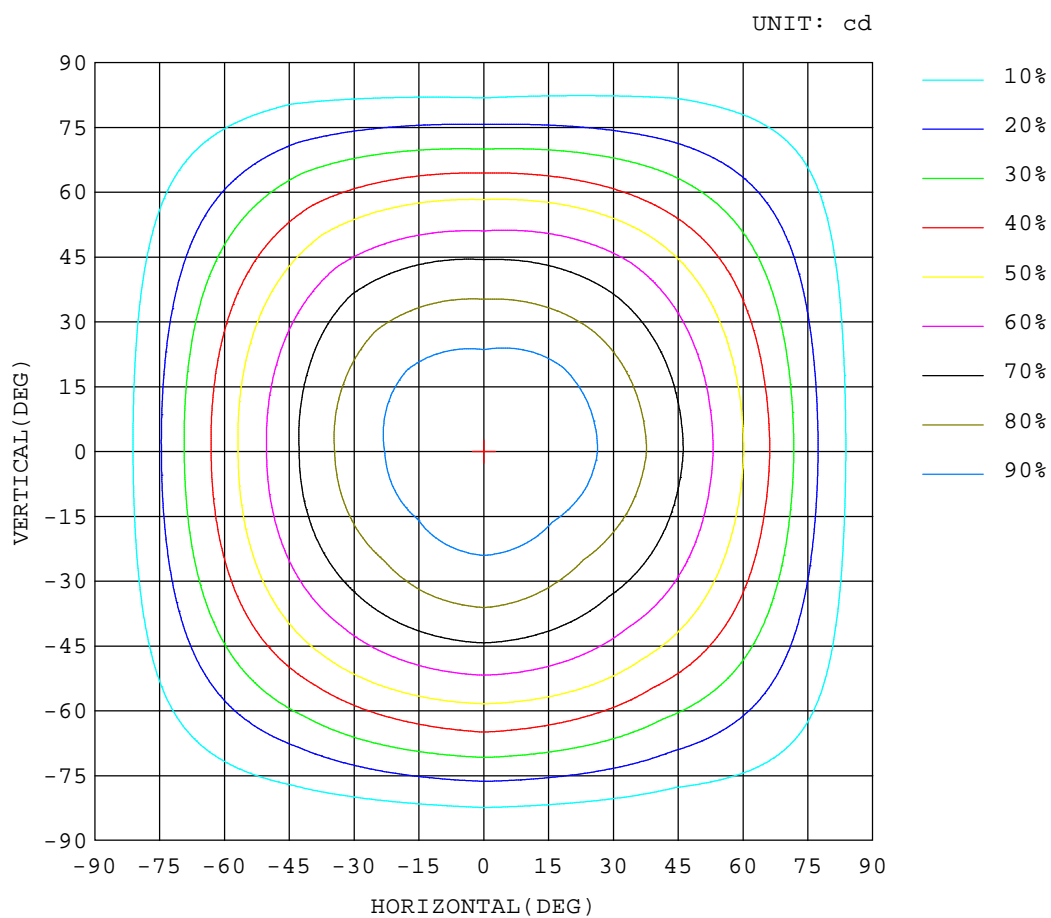

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日


Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

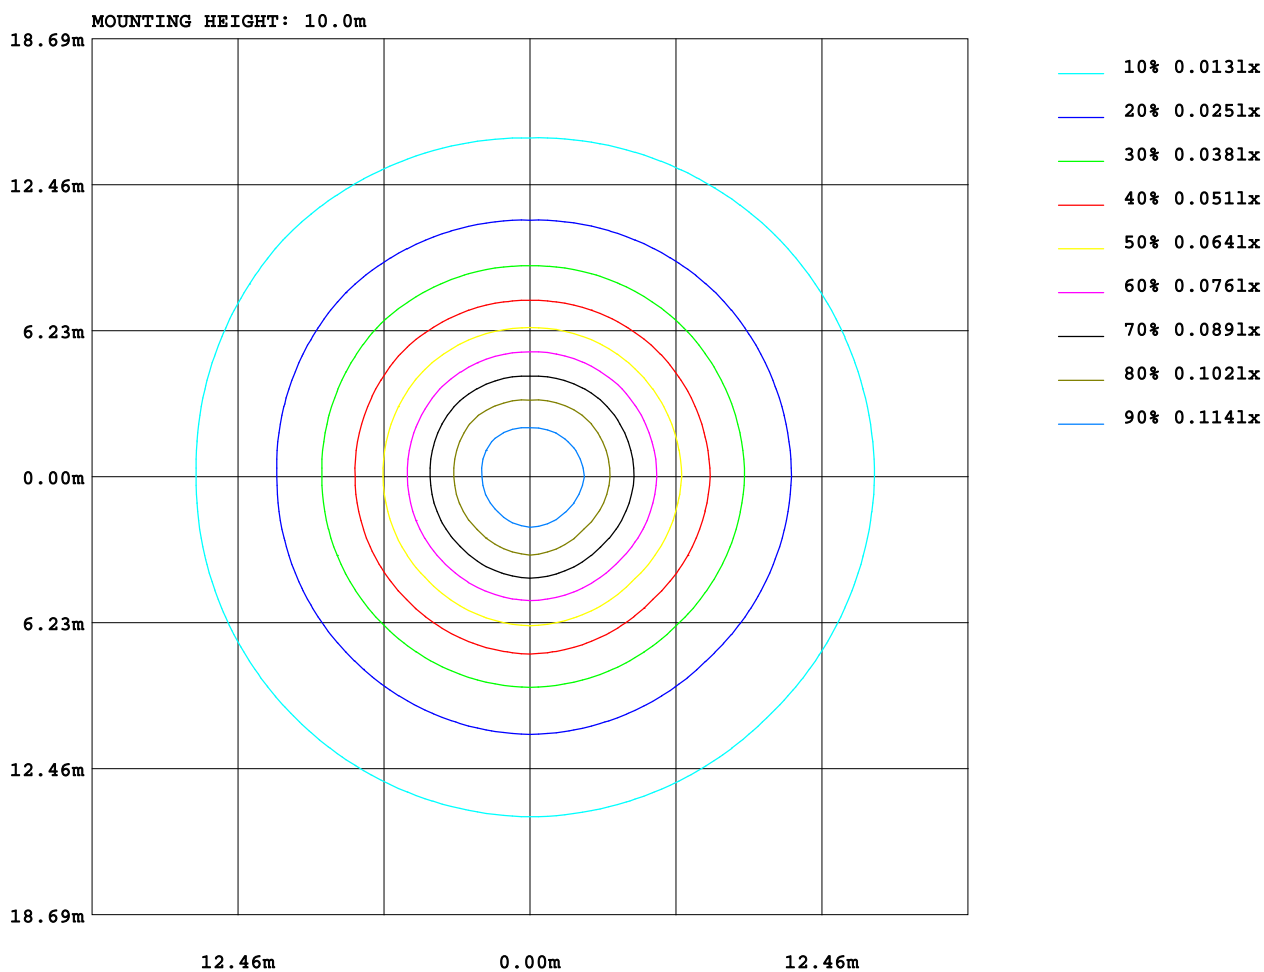

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

VERTICAL (DEG)	AREA FLUX DIAGRAM																	UNIT: lm	Φt	Φa
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.28	0.07
80	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.76	0.72
70	0.00	0.01	0.02	0.04	0.07	0.10	0.12	0.14	0.15	0.15	0.14	0.12	0.10	0.08	0.05	0.03	0.01	0.00	1.34	1.33
60	0.00	0.01	0.03	0.07	0.10	0.14	0.18	0.20	0.21	0.21	0.20	0.18	0.14	0.11	0.07	0.04	0.01	0.00	1.90	1.89
50	0.00	0.01	0.04	0.08	0.13	0.18	0.22	0.25	0.26	0.26	0.25	0.22	0.18	0.13	0.09	0.05	0.02	0.00	2.39	2.38
40	0.00	0.02	0.05	0.10	0.15	0.21	0.26	0.29	0.31	0.31	0.29	0.26	0.21	0.16	0.10	0.06	0.02	0.00	2.80	2.80
30	0.00	0.02	0.06	0.11	0.17	0.23	0.29	0.32	0.34	0.34	0.33	0.29	0.24	0.18	0.12	0.06	0.02	0.00	3.10	3.10
20	0.00	0.02	0.06	0.11	0.18	0.25	0.30	0.35	0.36	0.36	0.35	0.31	0.25	0.19	0.12	0.07	0.02	0.00	3.31	3.30
10	0.00	0.02	0.06	0.12	0.18	0.25	0.31	0.35	0.38	0.38	0.36	0.32	0.26	0.19	0.13	0.07	0.02	0.00	3.40	3.40
0	0.00	0.02	0.06	0.12	0.18	0.25	0.31	0.35	0.37	0.38	0.35	0.31	0.26	0.19	0.13	0.07	0.02	0.00	3.38	3.38
-10	0.00	0.02	0.06	0.11	0.18	0.24	0.30	0.34	0.36	0.36	0.34	0.30	0.25	0.18	0.12	0.07	0.02	0.00	3.25	3.25
-20	0.00	0.02	0.05	0.11	0.16	0.22	0.28	0.32	0.34	0.34	0.32	0.28	0.23	0.17	0.11	0.06	0.02	0.00	3.03	3.03
-30	0.00	0.02	0.05	0.09	0.15	0.20	0.25	0.29	0.31	0.31	0.29	0.25	0.20	0.15	0.10	0.05	0.02	0.00	2.72	2.72
-40	0.00	0.01	0.04	0.08	0.12	0.17	0.21	0.25	0.26	0.26	0.25	0.21	0.17	0.13	0.08	0.04	0.02	0.00	2.31	2.31
-50	0.00	0.01	0.03	0.06	0.09	0.13	0.17	0.20	0.21	0.21	0.20	0.17	0.13	0.10	0.06	0.03	0.01	0.00	1.82	1.81
-60	0.00	0.01	0.02	0.04	0.06	0.09	0.12	0.14	0.15	0.15	0.14	0.12	0.09	0.07	0.04	0.02	0.01	0.00	1.27	1.26
-70	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.08	0.08	0.08	0.07	0.05	0.04	0.02	0.01	0.01	0.00	0.70	0.64
-80	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.23	0.04
-90	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.23	0.04
-90 -80 -70 -60 -50 -40 -30 -20 -10 0 10 20 30 40 50 60 70 80 90																				
Φt	0.03	0.22	0.66	1.29	2.04	2.81	3.48	3.97	4.24	4.24	4.00	3.52	2.87	2.13	1.40	0.76	0.28	0.05	39	
Φa	0.00	0.19	0.63	1.26	2.01	2.78	3.44	3.94	4.20	4.21	3.96	3.48	2.84	2.10	1.37	0.73	0.25	0.02		37

Test System: HOPPO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 6.320 m
 Remarks:


LEDWISE TECHNOLOGY LIMITED TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

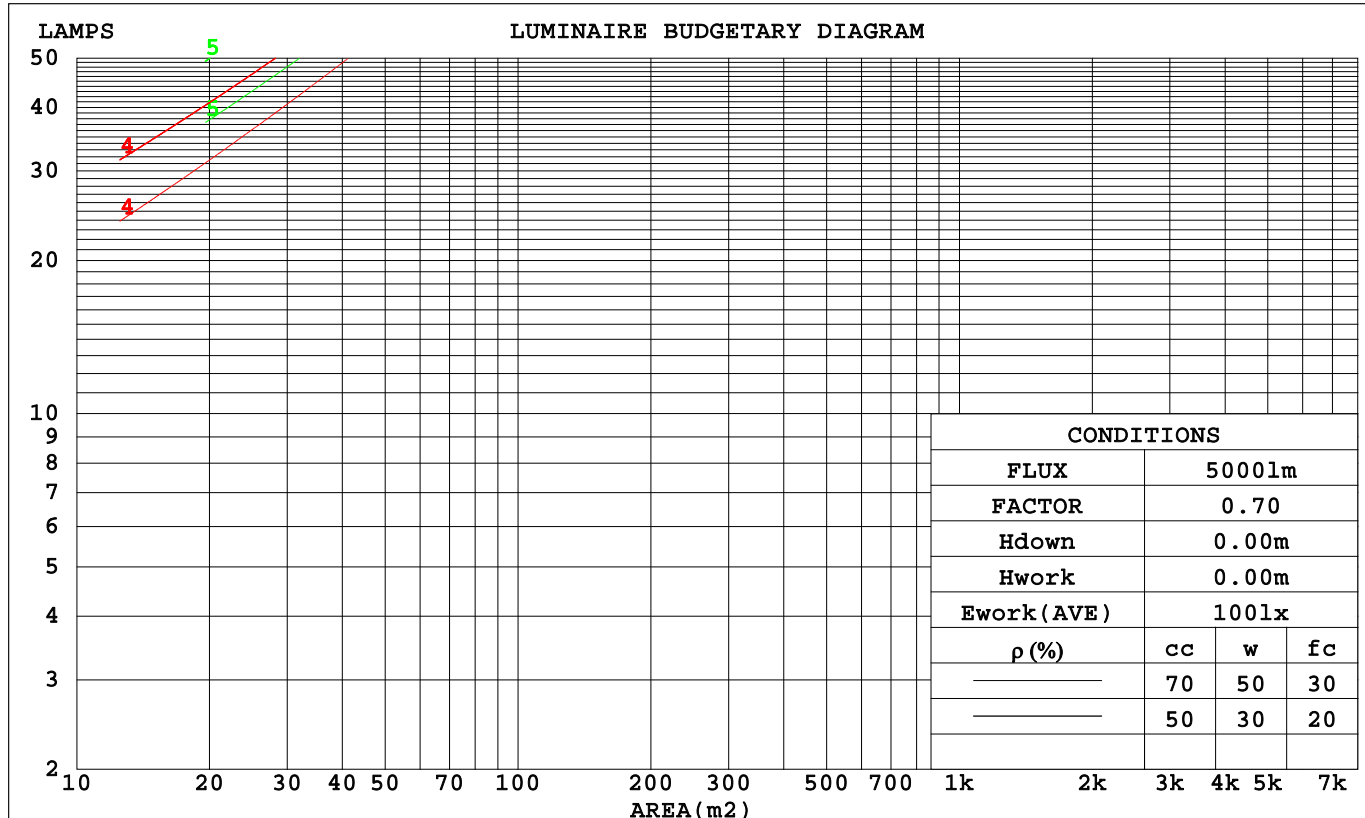

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

WEC AND CCEC

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:	
SPECIFICATION:2700K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试	

ρ_{cc}	80%			70%			50%			30%			10%			0														
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρ_{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.014	.008	.003	.014	.008	.003	.013	.008	.002	.013	.007	.002	.012	.007	.002															
2.0	.013	.007	.002	.013	.007	.002	.013	.007	.002	.012	.007	.002	.012	.007	.002															
3.0	.012	.007	.002	.012	.006	.002	.012	.006	.002	.011	.006	.002	.011	.006	.002															
4.0	.011	.006	.002	.011	.006	.002	.011	.006	.002	.010	.006	.002	.010	.005	.002															
5.0	.011	.005	.002	.010	.005	.002	.010	.005	.002	.010	.005	.001	.009	.005	.001															
6.0	.010	.005	.001	.010	.005	.001	.009	.005	.001	.009	.005	.001	.009	.004	.001															
7.0	.009	.004	.001	.009	.004	.001	.009	.004	.001	.008	.004	.001	.008	.004	.001															
8.0	.008	.004	.001	.008	.004	.001	.008	.004	.001	.008	.004	.001	.007	.004	.001															
9.0	.008	.004	.001	.008	.004	.001	.007	.004	.001	.007	.004	.001	.007	.004	.001															
10.0	.007	.004	.001	.007	.004	.001	.007	.003	.001	.007	.003	.001	.007	.003	.001															

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.009	.009	.009	.008	.008	.008	.005	.005	.005	.003	.003	.003	.001	.001	.001		
1.0	.009	.008	.007	.008	.007	.006	.005	.005	.004	.003	.003	.002	.001	.001	.001		
2.0	.009	.007	.005	.007	.006	.004	.005	.004	.003	.003	.002	.002	.001	.001	.001		
3.0	.008	.006	.004	.007	.005	.004	.005	.004	.002	.003	.002	.001	.001	.001	.000		
4.0	.008	.005	.003	.007	.005	.003	.005	.003	.002	.003	.002	.001	.001	.001	.000		
5.0	.008	.005	.003	.006	.004	.002	.004	.003	.002	.003	.002	.001	.001	.001	.000		
6.0	.007	.004	.003	.006	.004	.002	.004	.003	.002	.002	.002	.001	.001	.001	.000		
7.0	.007	.004	.002	.006	.004	.002	.004	.003	.001	.002	.001	.001	.001	.000	.000		
8.0	.007	.004	.002	.006	.003	.002	.004	.002	.001	.002	.001	.001	.001	.000	.000		
9.0	.006	.004	.002	.005	.003	.002	.004	.002	.001	.002	.001	.001	.001	.000	.000		
10.0	.006	.003	.002	.005	.003	.002	.004	.002	.001	.002	.001	.001	.001	.000	.000		

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

Uncorrected UGR Table

Report number:

MANUFACTURER:						Address:					
NAME: LTR-S-DTW-24V-3.0W-16						TYPE:软光条			WEIGHT:		
SPECIFICATION:2700K						DIMENSION: 10MM*2FT			SERIAL No.:带调光测试		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.7	7.2	6.0	7.4	7.7	5.5	7.0	5.8	7.2	7.5	
	3H	7.4	8.8	7.7	9.0	9.3	7.2	8.6	7.5	8.8	9.1
	4H	8.0	9.4	8.4	9.7	10.0	7.8	9.1	8.2	9.4	9.7
	6H	8.6	9.8	8.9	10.1	10.5	8.2	9.4	8.5	9.7	10.1
	8H	8.7	9.9	9.1	10.2	10.6	8.3	9.5	8.7	9.8	10.2
	12H	8.9	10.0	9.2	10.4	10.7	8.4	9.6	8.8	9.9	10.3
4H	2H	6.2	7.5	6.6	7.8	8.1	6.1	7.4	6.4	7.7	8.0
	3H	8.1	9.3	8.5	9.6	9.9	7.9	9.1	8.3	9.4	9.8
	4H	8.9	9.9	9.3	10.3	10.7	8.7	9.7	9.1	10.1	10.5
	6H	9.5	10.5	9.9	10.9	11.3	9.2	10.1	9.6	10.5	10.9
	8H	9.7	10.6	10.2	11.0	11.4	9.3	10.2	9.8	10.6	11.1
	12H	9.9	10.7	10.4	11.2	11.6	9.5	10.3	10.0	10.7	11.2
8H	4H	9.1	10.0	9.5	10.4	10.8	8.9	9.8	9.3	10.2	10.6
	6H	9.8	10.6	10.3	11.0	11.5	9.5	10.2	10.0	10.7	11.2
	8H	10.1	10.8	10.6	11.3	11.8	9.8	10.4	10.3	10.9	11.4
	12H	10.4	11.0	10.9	11.5	12.0	10.0	10.6	10.5	11.1	11.6
12H	4H	9.1	9.9	9.5	10.3	10.8	8.9	9.7	9.3	10.1	10.6
	6H	9.9	10.5	10.4	11.0	11.5	9.5	10.2	10.0	10.7	11.2
	8H	10.2	10.8	10.7	11.3	11.8	9.8	10.4	10.4	10.9	11.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2					
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.4					
2.0H	+ 0.2 / - 0.2					+ 0.3 / - 0.3					

CIE Pub.117 Corrected 864.2 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.5)

Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:	Address:		
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:	
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试	

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	3	2	2	2	2	2	2	2	2	1
0.80	3	2	2	3	2	2	3	2	2	2
1.00	3	3	2	3	3	2	3	3	2	2
1.25	4	3	3	4	3	3	3	3	3	2
1.50	4	3	3	4	3	3	4	3	3	3
2.00	4	4	4	4	4	3	4	4	3	3
2.50	4	4	4	4	4	4	4	4	4	3
3.00	5	4	4	4	4	4	4	4	4	3
4.00	5	4	4	5	4	4	4	4	4	4
5.00	5	5	4	5	5	4	5	4	4	4
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


Test System:HOP00 HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:6.320 m
 Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

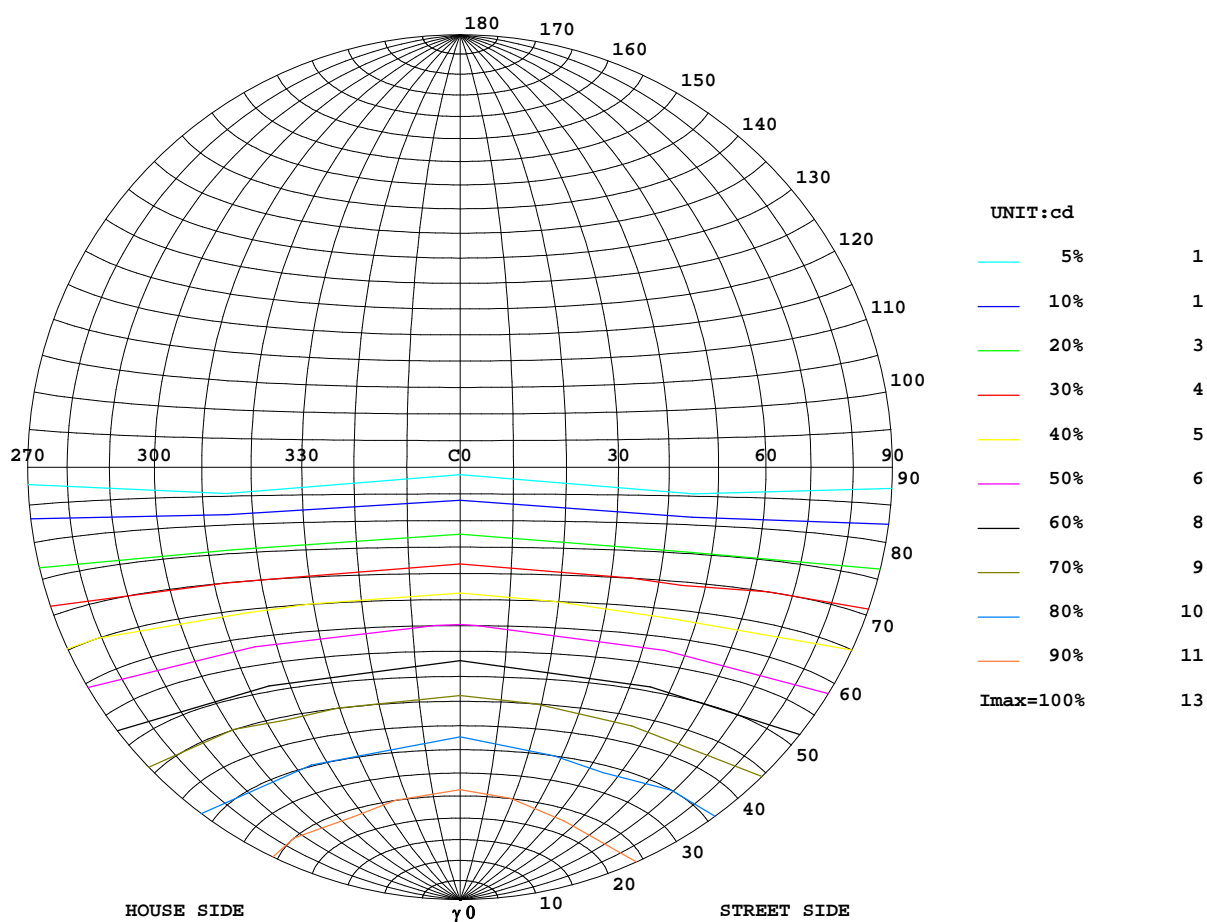

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日



Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

ISOLUX DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

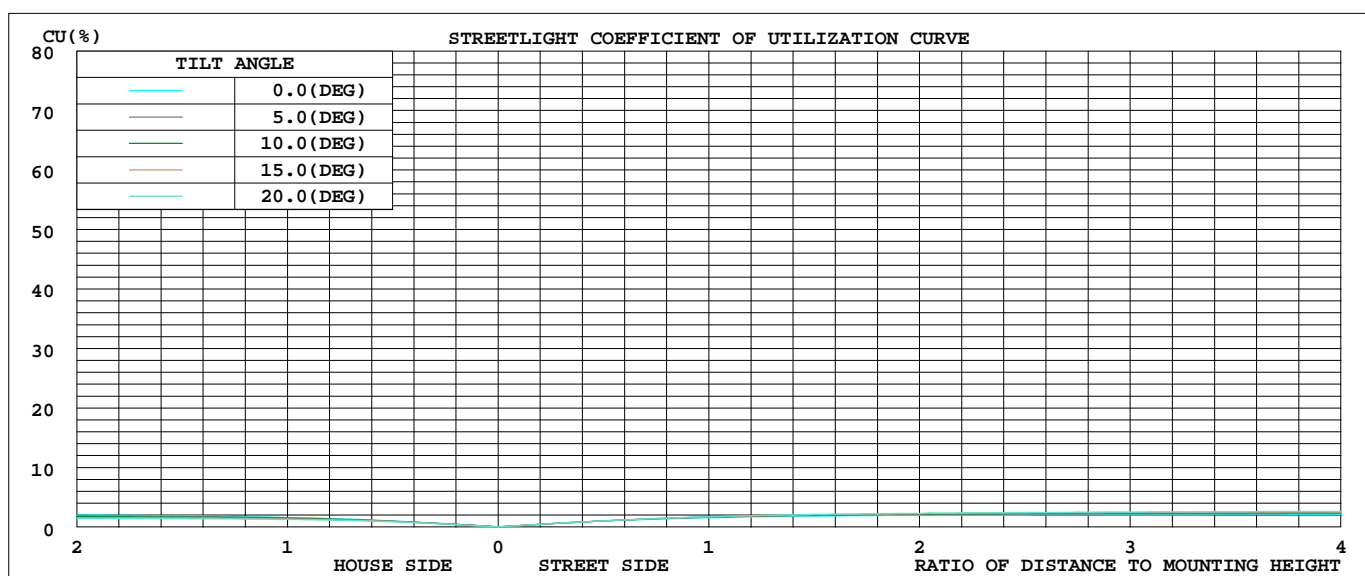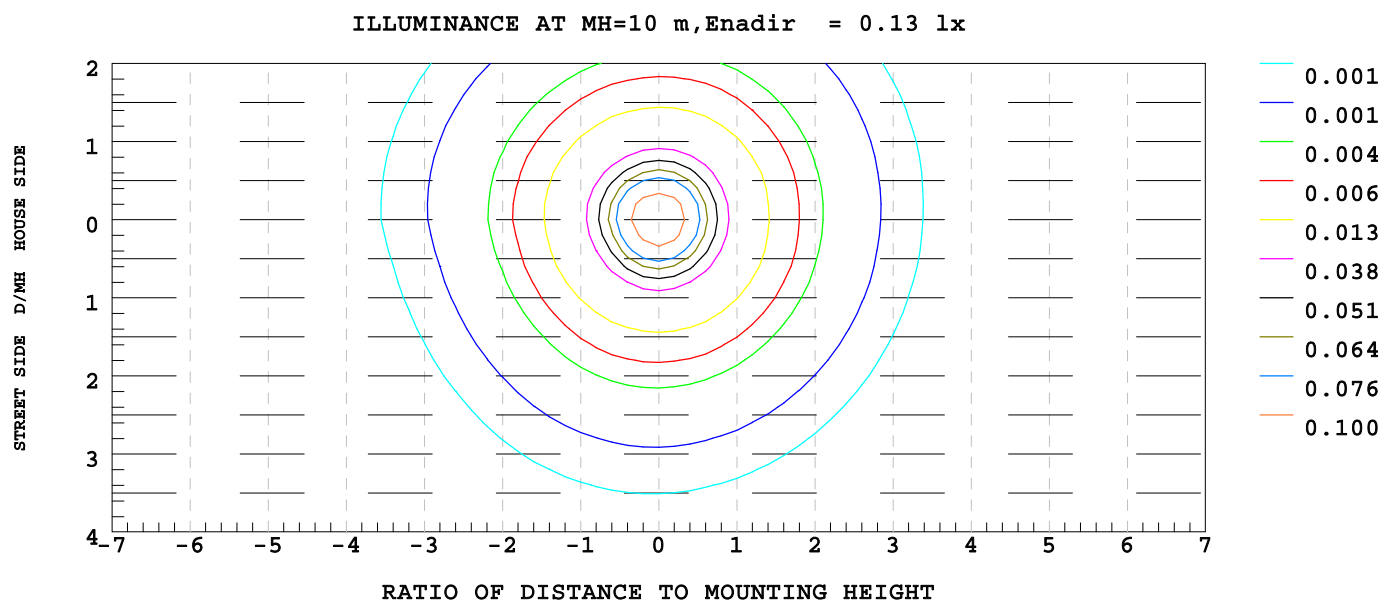


Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE: 软光条	WEIGHT:
SPECIFICATION: 2700K	DIMENSION: 10MM*2FT	SERIAL No.: 带调光测试

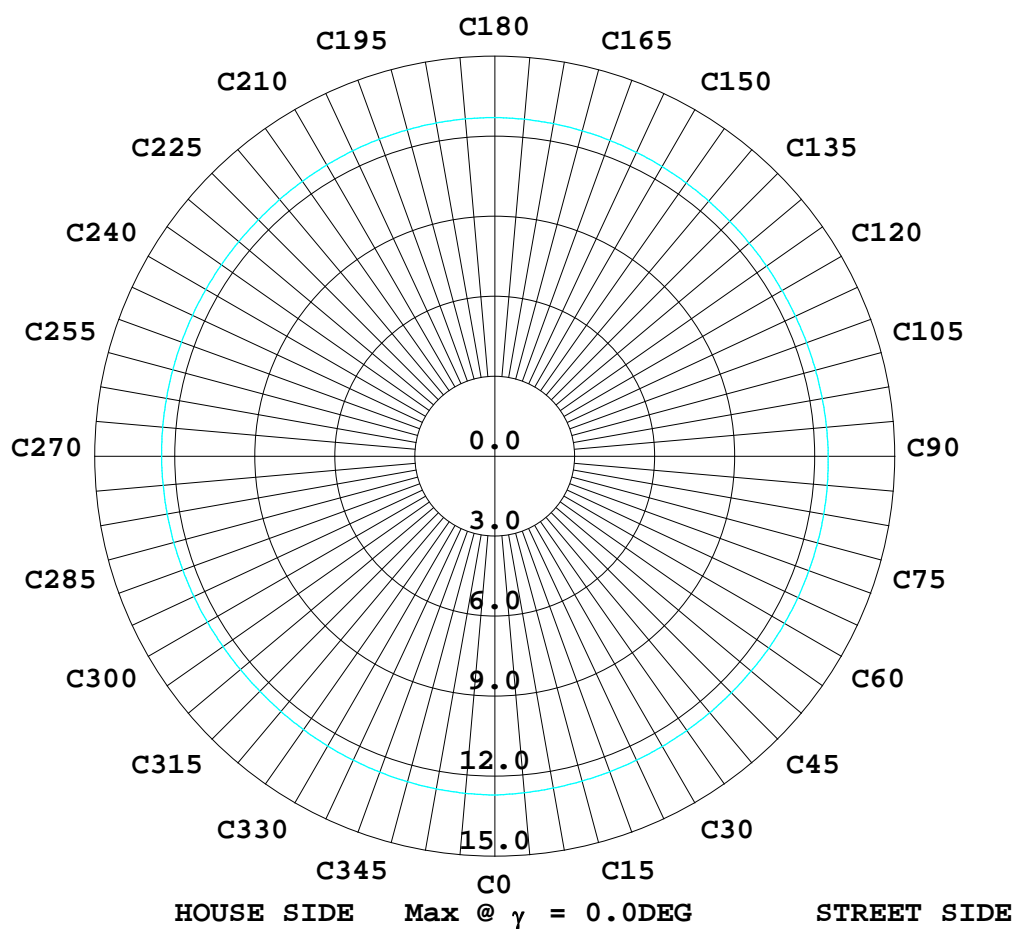

Test System: HOP00 HPG1800
Temperature: 25.3DEG
Operators:
Test Date: 2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 6.320 m
Remarks:

LEDWISE TECHNOLOGY LIMITED TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER:	Address:	
NAME: LTR-S-DTW-24V-3.0W-16	TYPE:软光条	WEIGHT:
SPECIFICATION:2700K	DIMENSION: 10MM*2FT	SERIAL No.:带调光测试

UNIT: cd

C(DEG) γ (DEG)	0	45	90	135	180	225	270	315
0.0	12.7	12.5	12.5	12.4	12.7	12.5	12.5	12.4
5.0	12.4	12.4	12.4	12.5	12.4	12.6	12.5	12.4
10.0	12.4	12.4	12.3	12.2	12.2	12.4	12.3	12.3
15.0	12.3	11.9	12.1	11.9	12.0	12.1	11.9	12.2
20.0	11.9	11.6	11.8	11.5	11.6	11.9	11.7	11.9
25.0	11.5	11.2	11.3	11.2	11.2	11.5	11.3	11.5
30.0	11.0	10.7	10.7	10.5	10.6	10.9	10.9	11.0
35.0	10.5	9.94	10.3	10.0	10.1	10.3	10.1	10.3
40.0	9.86	9.42	9.54	9.38	9.42	9.74	9.58	9.86
45.0	9.10	8.58	8.78	8.58	8.42	9.10	8.78	9.02
50.0	8.18	7.74	7.94	7.66	7.66	8.06	7.78	8.22
55.0	7.26	6.91	7.02	6.83	6.67	7.14	6.94	7.26
60.0	6.39	5.83	6.03	5.75	5.79	6.23	6.03	6.27
65.0	5.35	4.71	5.07	4.59	4.63	5.11	4.95	5.11
70.0	4.23	3.67	3.99	3.59	3.67	4.11	3.79	4.15
75.0	3.03	2.59	2.87	2.39	2.43	2.87	2.67	2.87
80.0	1.99	1.47	1.63	1.43	1.47	1.79	1.59	1.95
85.0	1.03	0.68	0.88	0.52	0.56	0.96	0.68	1.11
90.0	0.48	0.04	0.32	0.12	0.12	0.36	0.16	0.40
95.0	0.28	0.08	0.32	0.08	0.12	0.16	0.16	0.28
100.0	0.28	0.00	0.32	0.04	0.08	0.20	0.08	0.24
105.0	0.28	0.00	0.16	0.04	0.08	0.12	0.04	0.28
110.0	0.16	0.00	0.20	0.08	0.04	0.20	0.08	0.12
115.0	0.24	0.12	0.20	0.04	0.16	0.16	0.08	0.16
120.0	0.28	0.16	0.24	0.00	0.08	0.16	0.04	0.12
125.0	0.16	0.04	0.16	0.12	0.12	0.28	0.12	0.08
130.0	0.16	0.00	0.12	0.04	0.16	0.08	0.08	0.16
135.0	0.32	0.12	0.16	0.08	0.04	0.20	0.16	0.12
140.0	0.20	0.04	0.16	0.08	0.12	0.12	0.12	0.20
145.0	0.16	0.08	0.20	0.04	0.08	0.12	0.08	0.20
150.0	0.08	0.12	0.00	0.00	0.16	0.08	0.08	0.00
155.0	0.12	0.08	0.20	0.16	0.12	0.08	0.12	0.20
160.0	0.16	0.08	0.12	0.00	0.04	0.04	0.08	0.12
165.0	0.04	0.12	0.08	0.16	0.00	0.12	0.04	0.12
170.0	0.04	0.12	0.00	0.08	0.08	0.12	0.16	0.20
175.0	0.20	0.04	0.00	0.04	0.12	0.12	0.00	0.08
180.0	0.00	0.16	0.12	0.16	0.12	0.00	0.04	0.16

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:2019年09月16日

Test Set: 8.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:6.320 m
Remarks: