


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.91 lm/W			
MODEL	NMS1217-Plus	Imax(cd)	143.6	S/MH(C0/180)	1.31
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	478.18	h UP,DN(C0-180)	3.9,46.4
NOMINAL FLUX(lm)	478.183	CIE CLASS	DIRECT	h UP,DN(C180-360)	3.6,46.1
LAMPS INSIDE	1	h up(%)	7.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	92.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

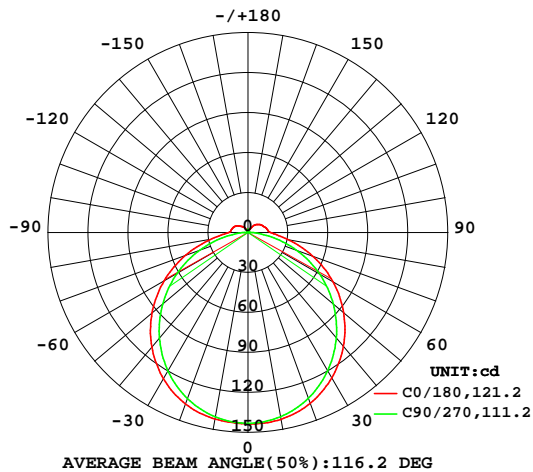

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

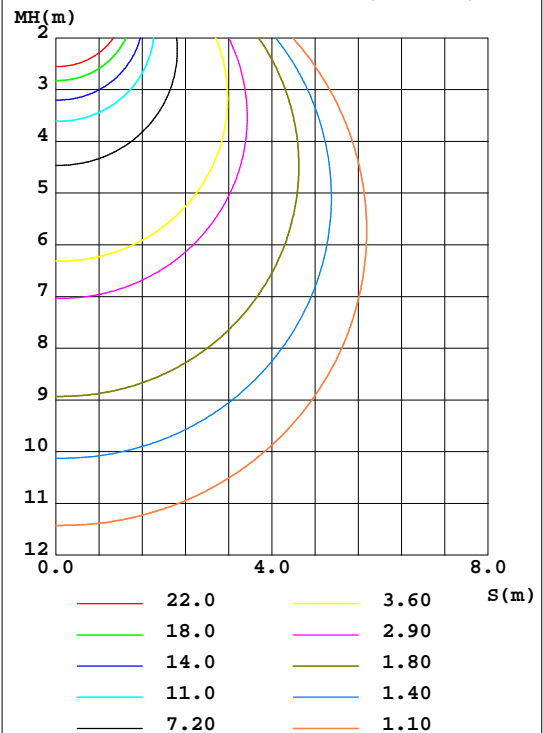

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:COLORS  
 Test Date:2019-10-23

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	142.4	141.6	140.4	140.9	142.1	141.4	140.6	141.2	0~ 10	13.58	13.58	2.84,2.84
20	136.5	135.1	132.4	134.8	137.0	135.3	132.7	134.5	10~ 20	39.14	52.73	11,11
30	125.9	123.9	119.8	124.2	126.8	124.4	120.0	123.2	20~ 30	59.79	112.5	23.5,23.5
40	111.5	108.8	103.2	109.4	112.3	109.3	103.4	108.0	30~ 40	72.78	185.3	38.8,38.8
50	93.77	90.48	83.66	91.06	94.06	90.72	83.57	89.45	40~ 50	76.58	261.9	54.8,54.8
60	73.55	69.82	61.89	69.89	72.78	69.38	61.46	68.55	50~ 60	70.86	332.7	69.6,69.6
70	51.57	47.60	38.68	46.77	49.62	46.30	38.06	45.90	60~ 70	56.50	389.2	81.4,81.4
80	30.15	26.02	16.07	23.95	27.45	23.94	15.85	23.99	70~ 80	36.11	425.4	89,89
90	17.09	13.02	2.217	10.26	14.63	10.96	2.735	12.06	80~ 90	16.95	442.3	92.5,92.5
100	14.72	10.53	0.5010	8.581	12.70	9.312	0.3541	9.232	90~100	9.885	452.2	94.6,94.6
110	13.00	8.957	0.7210	7.250	11.75	7.957	0.6153	7.333	100~110	8.248	460.4	96.3,96.3
120	11.58	7.129	1.042	4.908	10.07	5.488	0.9090	6.241	110~120	6.533	467.0	97.7,97.7
130	9.489	5.758	1.341	4.137	7.532	4.629	1.149	4.663	120~130	4.848	471.8	98.7,98.7
140	7.185	3.213	1.556	1.663	5.623	1.650	1.350	3.046	130~140	3.105	474.9	99.3,99.3
150	2.506	1.970	1.670	1.850	2.643	1.810	1.577	1.770	140~150	1.545	476.5	99.6,99.6
160	2.371	1.944	2.004	2.051	1.997	2.004	1.931	1.856	150~160	0.9084	477.4	99.8,99.8
170	2.218	2.211	2.317	2.231	1.990	2.184	2.292	2.198	160~170	0.5953	478.0	100,100
180	2.104	2.478	2.532	2.545	2.117	2.465	2.558	2.552	170~180	0.2169	478.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

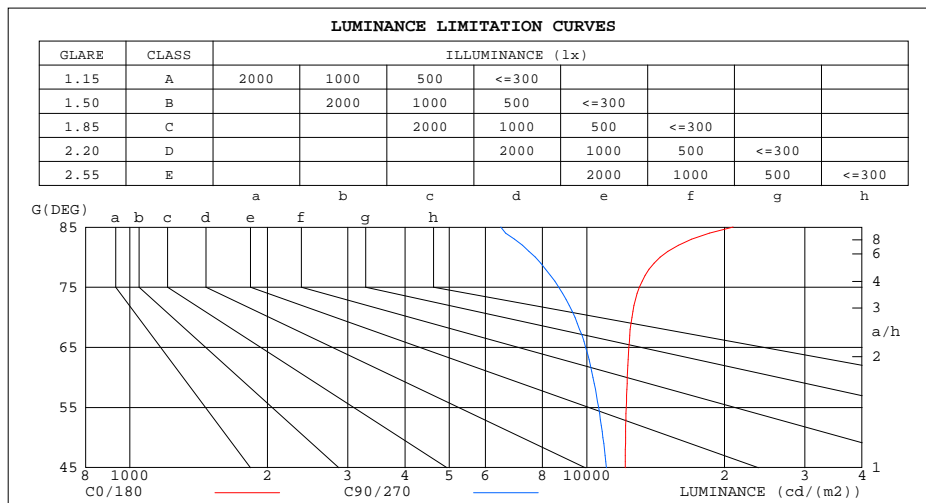

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	20894	6482
80	14469	7714
75	13037	8684
70	12564	9424
65	12351	9944
60	12259	10316
55	12200	10610
50	12157	10846
45	12138	11044


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

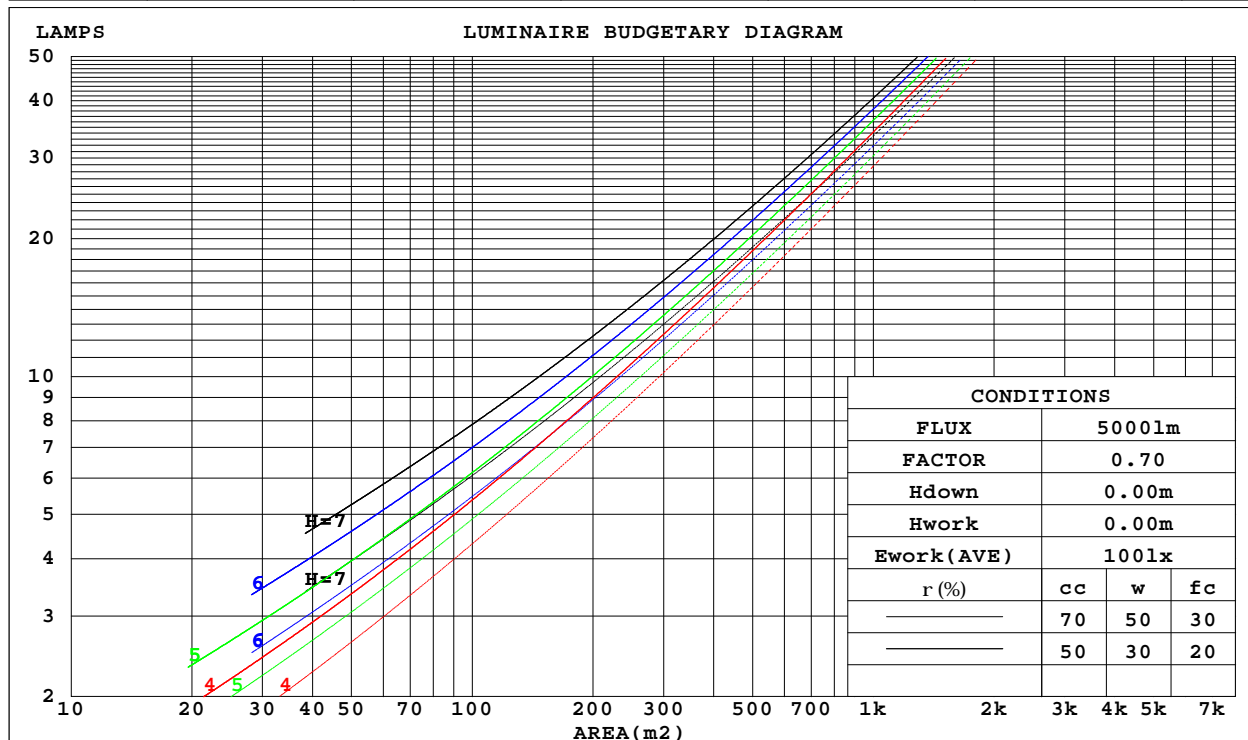

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:COLORS  
 Test Date:2019-10-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0														
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
rfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.332	.189	.060	.322	.184	.058	.305	.175	.056	.288	.166	.053	.273	.158	.051															
2.0	.303	.166	.051	.295	.162	.050	.279	.155	.048	.265	.148	.046	.251	.142	.045															
3.0	.277	.147	.044	.270	.144	.043	.255	.138	.042	.242	.133	.041	.230	.127	.039															
4.0	.254	.132	.039	.247	.129	.038	.234	.124	.037	.223	.119	.036	.212	.115	.035															
5.0	.233	.119	.034	.227	.117	.034	.216	.112	.033	.205	.108	.032	.195	.104	.031															
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.181	.095	.028															
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.177	.091	.026	.169	.088	.026															
8.0	.186	.091	.026	.182	.090	.025	.174	.087	.025	.166	.084	.024	.158	.081	.024															
9.0	.174	.084	.024	.170	.083	.023	.163	.080	.023	.155	.078	.022	.149	.075	.022															
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.073	.021	.140	.070	.020															

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.248	.248	.248	.212	.212	.212	.144	.144	.144	.083	.083	.083	.027	.027	.027	
1.0	.239	.214	.190	.205	.183	.164	.140	.126	.113	.081	.073	.066	.026	.023	.021	
2.0	.232	.190	.155	.199	.163	.134	.136	.113	.093	.078	.066	.055	.025	.021	.018	
3.0	.224	.173	.132	.192	.149	.114	.132	.103	.080	.076	.060	.047	.024	.020	.015	
4.0	.217	.160	.116	.186	.138	.101	.128	.096	.071	.074	.056	.042	.024	.018	.014	
5.0	.209	.150	.106	.180	.129	.092	.124	.090	.065	.072	.053	.038	.023	.017	.013	
6.0	.202	.141	.098	.174	.122	.085	.120	.086	.060	.069	.050	.036	.022	.016	.012	
7.0	.195	.135	.092	.168	.117	.080	.116	.082	.057	.067	.048	.034	.022	.016	.011	
8.0	.189	.129	.088	.162	.112	.077	.112	.078	.054	.065	.046	.032	.021	.015	.011	
9.0	.182	.124	.084	.157	.108	.074	.109	.076	.052	.063	.045	.031	.021	.015	.010	
10.0	.177	.120	.082	.152	.104	.071	.106	.073	.051	.062	.043	.030	.020	.014	.010	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm											
NAME: NMS1217-Plus					TYPE:			WEIGHT:			
SPEC.:NMS1217-9DW24NSN050CC0100-Plus					DIM.: 1000*12*17			SERIAL No.:			
MFR.: COLORS					SUR.:1000*12			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	23.8	25.3	24.2	25.6	25.9	23.2	24.7	23.6	25.0	25.3	
	3H	25.6	27.0	26.0	27.3	27.7	24.7	26.1	25.1	26.4	26.8
	4H	26.5	27.8	26.9	28.2	28.6	25.3	26.6	25.7	27.0	27.4
	6H	27.3	28.5	27.7	28.9	29.3	25.7	26.9	26.2	27.3	27.8
	8H	27.7	28.8	28.1	29.3	29.7	25.9	27.0	26.3	27.4	27.9
	12H	28.1	29.2	28.6	29.7	30.1	25.9	27.1	26.4	27.5	27.9
4H	2H	24.4	25.7	24.8	26.1	26.5	23.9	25.2	24.4	25.6	26.0
	3H	26.4	27.5	26.9	28.0	28.4	25.7	26.8	26.1	27.2	27.7
	4H	27.4	28.5	27.9	28.9	29.4	26.4	27.4	26.9	27.9	28.4
	6H	28.4	29.3	28.9	29.8	30.3	27.0	27.9	27.5	28.4	28.9
	8H	28.9	29.7	29.4	30.2	30.8	27.2	28.0	27.7	28.5	29.1
	12H	29.4	30.2	30.0	30.7	31.3	27.3	28.1	27.8	28.6	29.2
8H	4H	27.7	28.6	28.3	29.1	29.6	26.9	27.7	27.4	28.2	28.7
	6H	28.9	29.6	29.5	30.1	30.7	27.7	28.4	28.2	28.9	29.5
	8H	29.5	30.2	30.1	30.7	31.3	28.0	28.6	28.5	29.1	29.8
	12H	30.3	30.8	30.8	31.4	32.0	28.2	28.8	28.8	29.3	30.0
12H	4H	27.8	28.5	28.3	29.0	29.6	26.9	27.7	27.5	28.2	28.8
	6H	29.0	29.6	29.6	30.2	30.8	27.8	28.4	28.4	29.0	29.6
	8H	29.7	30.2	30.3	30.8	31.5	28.2	28.8	28.8	29.3	30.0
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117, 478.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.6)

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	53	42	35	51	41	34	28
0.80	64	52	44	62	51	44	60	50	43	36
1.00	72	60	52	70	59	52	68	60	51	43
1.25	79	68	60	77	67	59	74	65	58	50
1.50	84	73	66	82	72	65	78	70	63	55
2.00	91	82	74	89	80	73	84	77	71	62
2.50	95	86	80	92	85	79	88	81	76	66
3.00	99	91	85	96	89	83	91	85	80	70
4.00	103	96	91	100	94	89	94	90	86	75
5.00	105	100	95	102	97	93	97	93	89	78
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

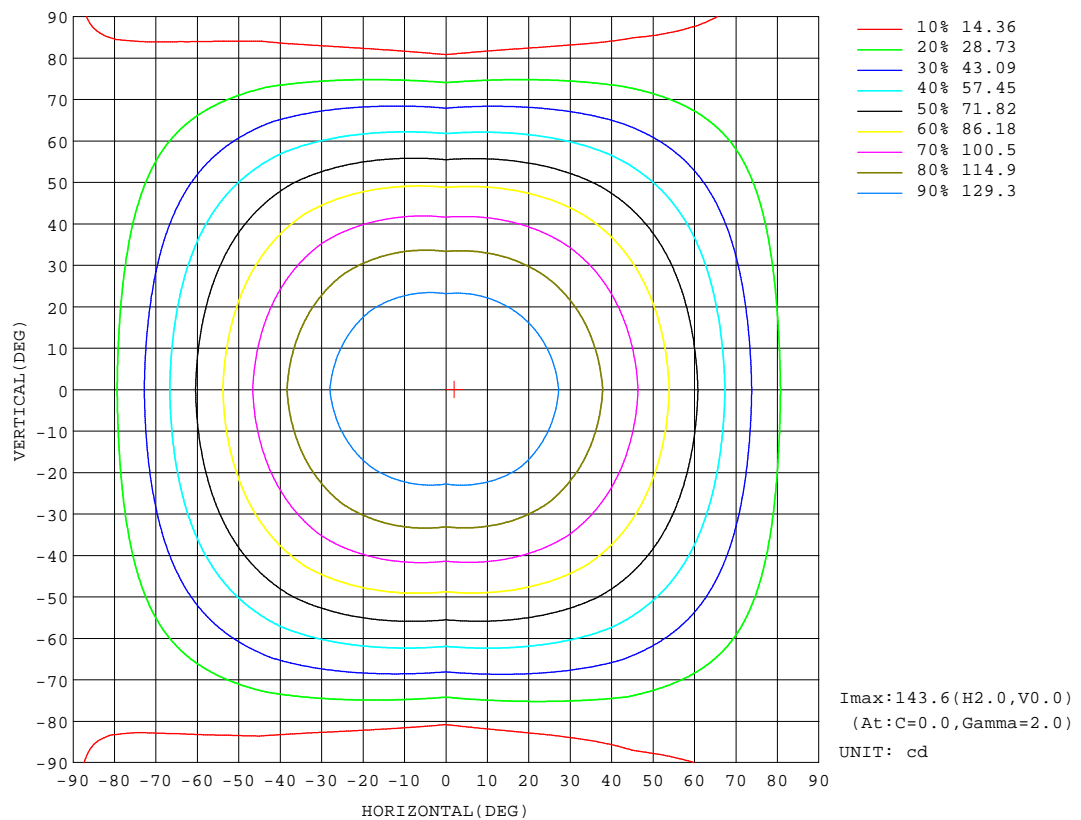

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

Flux out:326.2 lm

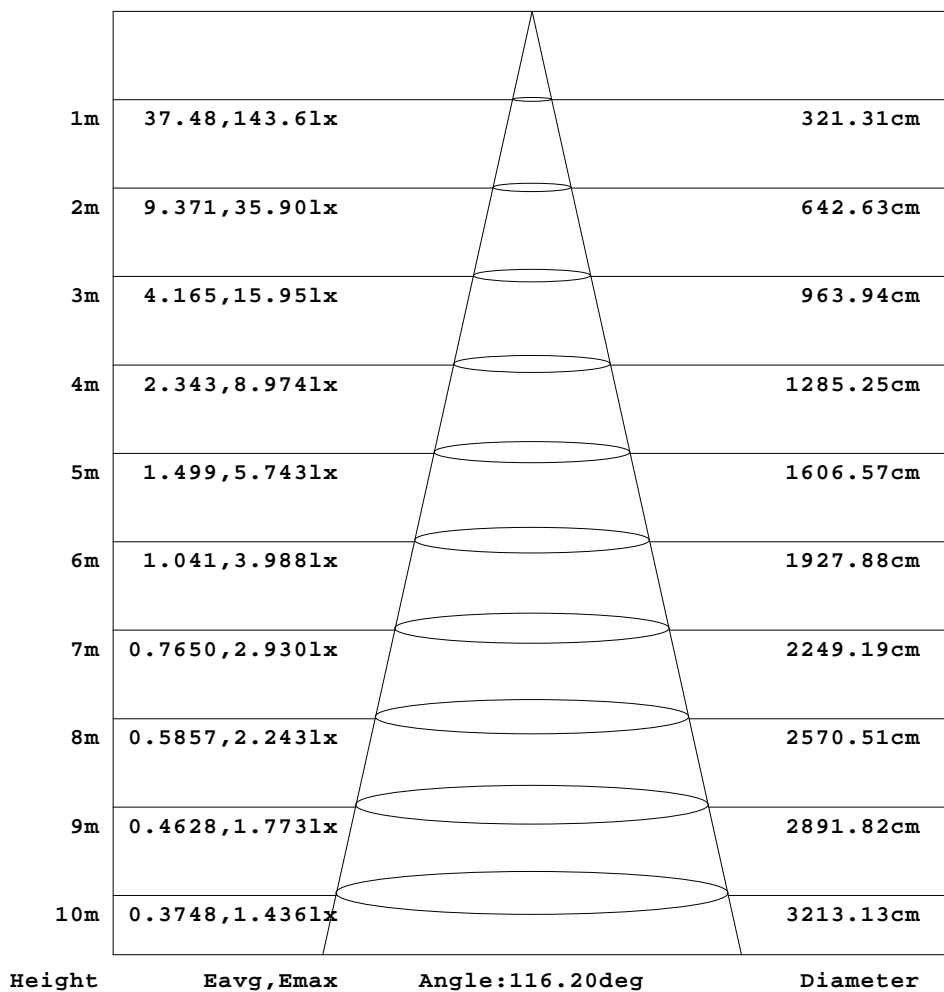


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

# ISOLUX DIAGRAM

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

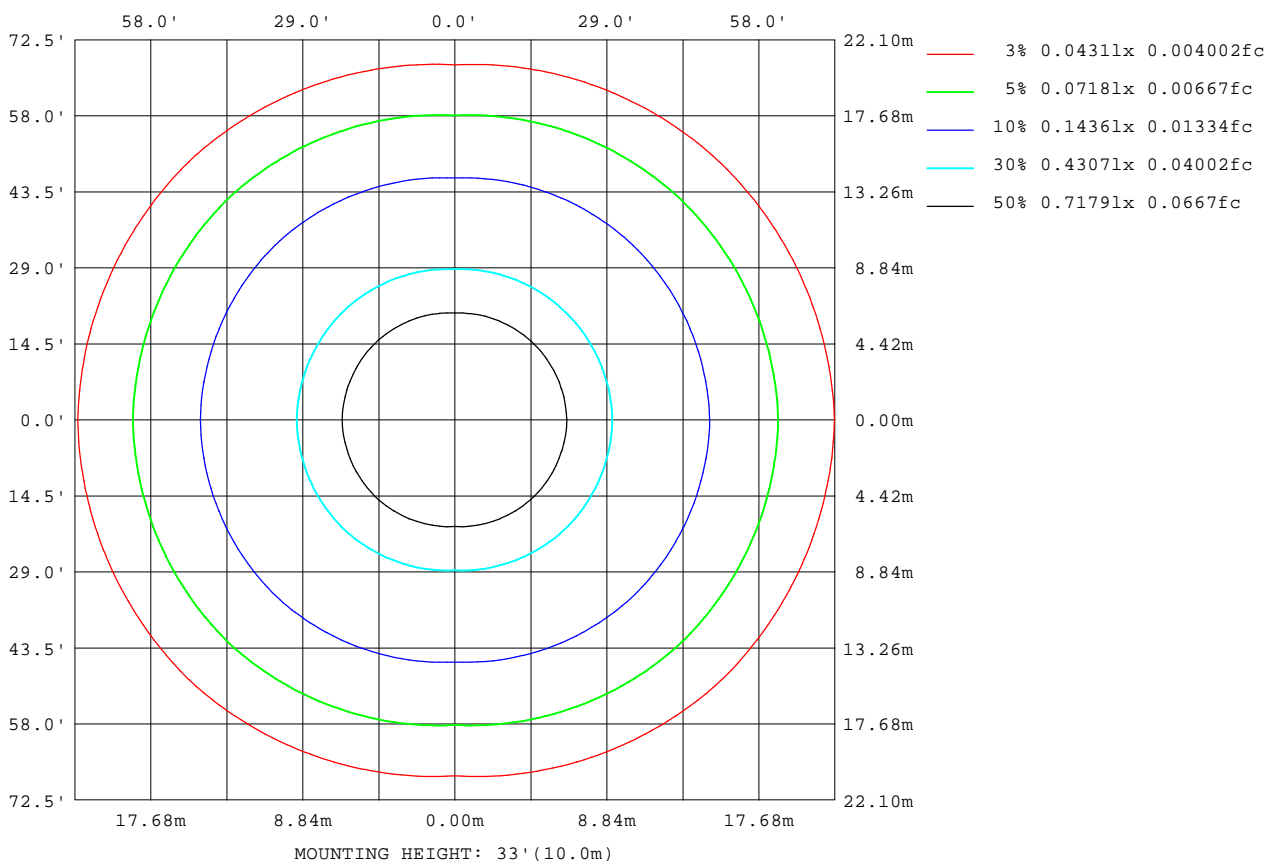

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

### LED Avg.L Report

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	12220
L_0~180(75)av	12650
L_0~180(85)av	19579
L_90~270(65)av	9887
L_90~270(75)av	8609
L_90~270(85)av	6626
L_45(65)av	11468
L_45(75)av	11316
L_45(85)av	15259

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

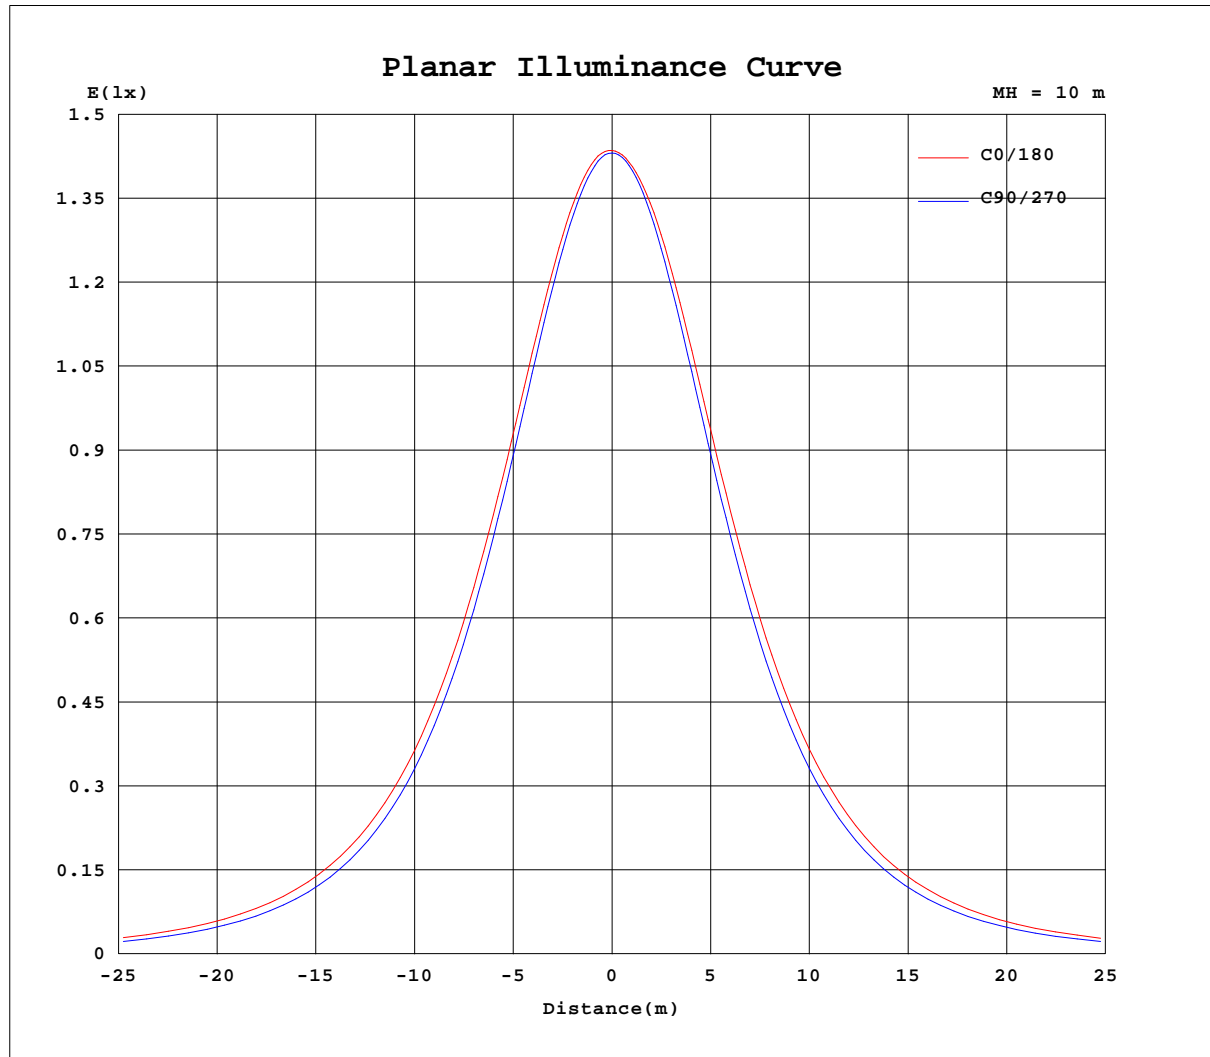

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: COLORS  
Test Date: 2019-10-23

deg Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.950m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4160A P:9.980W PF:0 Freq:1.000Hz Lamp Flux:478.183x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9DW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	144	143	143	143	144	143	143	143										
5	144	143	142	142	143	143	143	143										
10	142	142	140	141	142	141	141	141										
15	140	139	137	138	140	139	137	138										
20	136	135	132	135	137	135	133	134										
25	132	130	127	130	133	130	127	129										
30	126	124	120	124	127	124	120	123										
35	119	117	112	117	120	117	112	116										
40	111	109	103	109	112	109	103	108										
45	103	100.0	93.7	101	104	100	93.9	99.0										
50	93.8	90.5	83.7	91.1	94.1	90.7	83.6	89.5										
55	84.0	80.4	73.0	80.8	83.7	80.3	72.7	79.3										
60	73.6	69.8	61.9	69.9	72.8	69.4	61.5	68.6										
65	62.6	58.9	50.4	58.5	61.3	57.9	49.9	57.3										
70	51.6	47.6	38.7	46.8	49.6	46.3	38.1	45.9										
75	40.5	36.4	27.0	35.0	38.1	34.7	26.5	34.6										
80	30.2	26.0	16.1	24.0	27.5	23.9	15.9	24.0										
85	21.9	17.6	6.78	15.0	19.1	15.4	7.08	15.8										
90	17.1	13.0	2.22	10.3	14.6	11.0	2.74	12.1										
95	15.4	11.7	1.57	8.96	13.2	9.84	1.27	10.0										
100	14.7	10.5	0.50	8.58	12.7	9.31	0.35	9.23										
105	14.0	9.78	0.55	8.01	12.3	8.74	0.47	8.78										
110	13.0	8.96	0.72	7.25	11.7	7.96	0.62	7.33										
115	12.3	8.30	0.95	6.08	11.1	6.69	0.78	6.48										
120	11.6	7.13	1.04	4.91	10.1	5.49	0.91	6.24										
125	10.7	6.57	1.18	4.68	8.73	5.00	1.04	5.42										
130	9.49	5.76	1.34	4.14	7.53	4.63	1.15	4.66										
135	8.41	4.77	1.44	2.35	6.57	3.00	1.26	3.95										
140	7.18	3.21	1.56	1.66	5.62	1.65	1.35	3.05										
145	4.45	2.02	1.60	1.76	4.07	1.66	1.44	1.93										
150	2.51	1.97	1.67	1.85	2.64	1.81	1.58	1.77										
155	2.38	1.89	1.82	1.94	2.00	1.88	1.77	1.81										
160	2.37	1.94	2.00	2.05	2.00	2.00	1.93	1.86										
165	2.37	2.06	2.13	2.12	2.01	2.05	2.11	2.02										
170	2.22	2.21	2.32	2.23	1.99	2.18	2.29	2.20										
175	2.10	2.39	2.44	2.38	1.98	2.32	2.48	2.43										
180	2.10	2.48	2.53	2.54	2.12	2.46	2.56	2.55										

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:COLORS  
Test Date:2019-10-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks: