


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 45.82 lm/W			
MODEL	NMS1217-Plus	Imax(cd)	137.6	S/MH(C0/180)	1.28
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	458.18	h UP,DN(C0-180)	4.0,46.8
NOMINAL FLUX(lm)	458.18	CIE CLASS	DIRECT	h UP,DN(C180-360)	3.6,45.6
LAMPS INSIDE	1	h up(%)	7.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	92.4	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

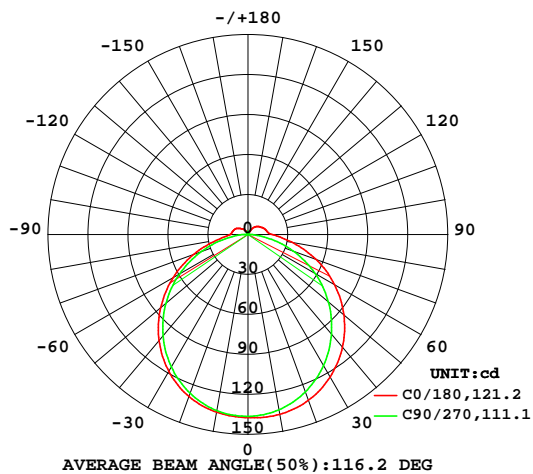

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

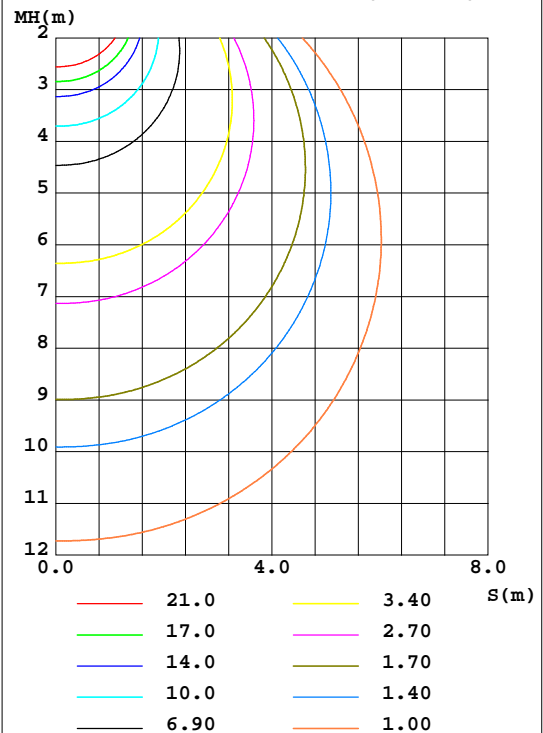

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:COLORS
 Test Date:2019-10-23

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	137.1	135.2	133.6	134.2	135.5	134.6	134.2	135.2	0- 10	12.97	12.97	2.83,2.83
20	132.5	129.4	125.8	127.9	129.4	128.3	126.9	129.7	10- 20	37.39	50.36	11,11
30	123.4	119.3	113.5	117.1	118.7	117.5	115.0	119.6	20- 30	57.12	107.5	23.5,23.5
40	110.4	105.3	97.52	102.5	103.9	102.5	99.28	105.8	30- 40	69.52	177.0	38.6,38.6
50	93.99	88.23	78.87	84.58	85.61	83.93	80.46	88.59	40- 50	73.12	250.1	54.6,54.6
60	74.96	68.86	58.11	64.20	64.97	62.89	59.27	69.06	50- 60	67.63	317.8	69.4,69.4
70	54.02	47.91	35.86	42.20	43.14	40.63	36.92	47.86	60- 70	53.96	371.7	81.1,81.1
80	33.15	27.01	14.37	21.46	23.14	20.06	15.79	27.13	70- 80	34.72	406.4	88.7,88.7
90	18.30	12.49	2.018	10.56	13.76	9.727	2.496	13.22	80- 90	16.72	423.1	92.4,92.4
100	14.56	10.15	0.4615	8.964	12.03	8.677	0.3213	9.914	90-100	9.750	432.9	94.5,94.5
110	13.17	8.859	0.6076	7.979	11.01	7.421	0.6348	7.425	100-110	8.144	441.0	96.3,96.3
120	11.20	6.612	0.9552	5.337	9.509	4.965	0.9020	6.504	110-120	6.354	447.4	97.6,97.6
130	9.460	5.202	1.168	4.500	7.075	4.013	1.136	5.088	120-130	4.755	452.1	98.7,98.7
140	7.160	2.961	1.369	1.816	5.214	1.591	1.316	2.535	130-140	2.981	455.1	99.3,99.3
150	2.422	1.703	1.583	1.824	2.301	1.677	1.491	1.476	140-150	1.465	456.6	99.7,99.7
160	2.104	1.811	1.830	1.957	1.924	1.843	1.831	1.630	150-160	0.8280	457.4	99.8,99.8
170	2.024	2.104	2.117	2.104	1.917	2.010	2.164	2.004	160-170	0.5548	458.0	100,100
180	1.957	2.324	2.438	2.398	2.004	2.318	2.438	2.398	170-180	0.2033	458.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

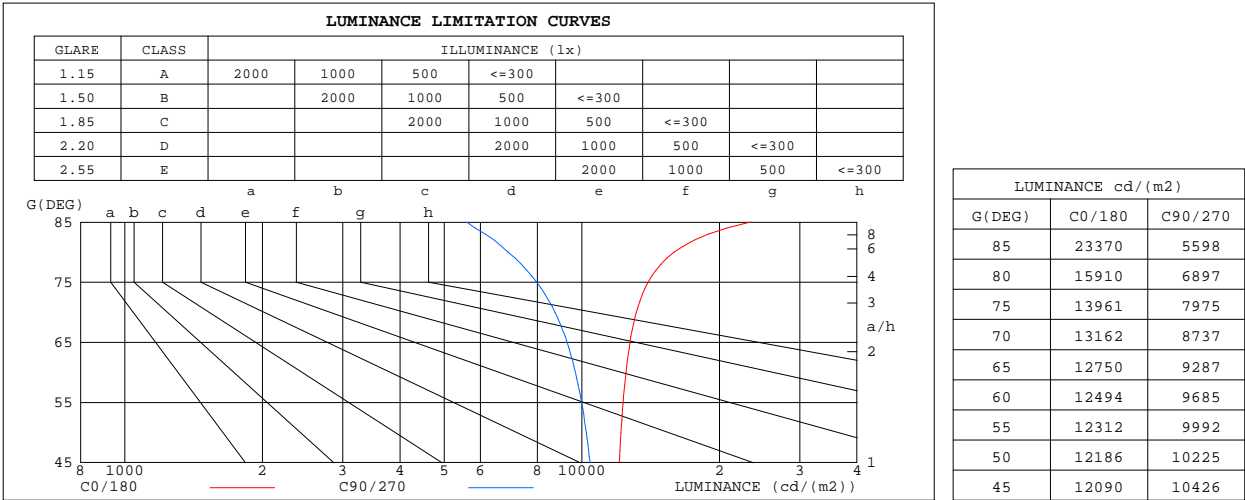


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.92
1.0	1.01	.96	.92	.98	.94	.90	.92	.89	.86	.87	.84	.82	.82	.80	.78	.75
2.0	.87	.80	.74	.85	.78	.73	.80	.75	.70	.76	.71	.67	.71	.68	.64	.62
3.0	.76	.68	.61	.74	.66	.60	.70	.63	.58	.66	.61	.56	.63	.58	.54	.52
4.0	.67	.58	.52	.66	.57	.51	.62	.55	.49	.59	.53	.48	.56	.51	.46	.44
5.0	.60	.51	.44	.58	.50	.44	.55	.48	.42	.53	.46	.41	.50	.45	.40	.38
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.41	.36	.45	.40	.35	.33
7.0	.49	.40	.34	.48	.39	.33	.45	.38	.33	.43	.37	.32	.41	.36	.31	.29
8.0	.44	.36	.30	.43	.35	.30	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
9.0	.41	.32	.27	.40	.32	.27	.38	.31	.26	.37	.30	.26	.35	.29	.25	.23
10.0	.38	.30	.24	.37	.29	.24	.35	.28	.24	.34	.28	.23	.32	.27	.23	.21

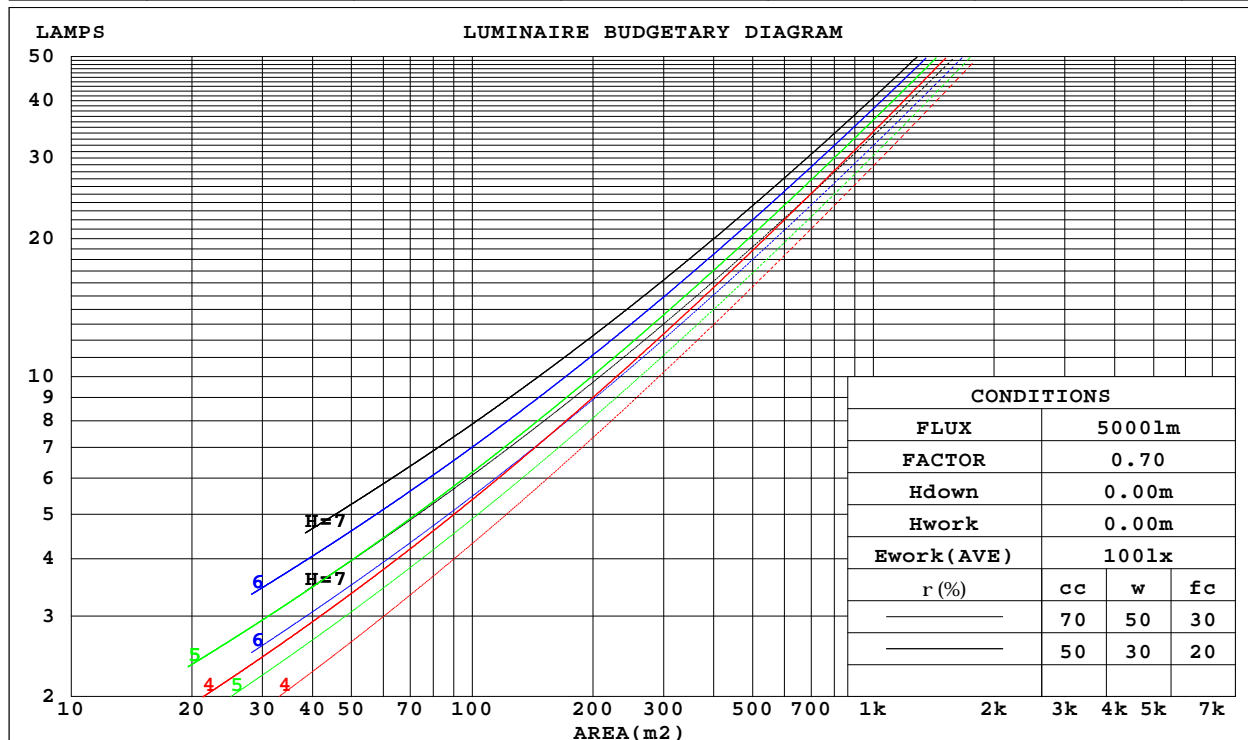

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0														
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
rfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.333	.189	.060	.323	.184	.059	.306	.175	.056	.289	.167	.054	.274	.159	.051															
2.0	.304	.167	.051	.295	.163	.050	.280	.155	.048	.265	.149	.047	.251	.142	.045															
3.0	.277	.148	.044	.270	.144	.043	.256	.139	.042	.242	.133	.041	.230	.128	.039															
4.0	.254	.132	.039	.247	.129	.038	.234	.124	.037	.223	.120	.036	.212	.115	.035															
5.0	.233	.119	.034	.227	.117	.034	.216	.112	.033	.205	.108	.032	.195	.104	.031															
6.0	.216	.108	.031	.210	.106	.031	.200	.102	.030	.190	.099	.029	.181	.095	.028															
7.0	.200	.099	.028	.195	.097	.028	.186	.094	.027	.177	.091	.026	.169	.088	.026															
8.0	.187	.091	.026	.182	.090	.025	.173	.087	.025	.165	.084	.024	.158	.081	.024															
9.0	.174	.084	.024	.170	.083	.023	.163	.080	.023	.155	.078	.022	.148	.075	.022															
10.0	.164	.079	.022	.160	.077	.022	.153	.075	.021	.146	.073	.021	.140	.070	.020															

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.249	.249	.249	.213	.213	.213	.145	.145	.145	.083	.083	.083	.027	.027	.027	
1.0	.241	.215	.191	.206	.184	.165	.141	.127	.114	.081	.073	.066	.026	.024	.021	
2.0	.233	.191	.156	.200	.164	.135	.137	.114	.094	.079	.066	.055	.025	.021	.018	
3.0	.225	.174	.133	.193	.150	.115	.133	.104	.081	.077	.061	.048	.025	.020	.016	
4.0	.218	.161	.117	.187	.139	.102	.128	.097	.072	.074	.057	.042	.024	.018	.014	
5.0	.210	.151	.107	.181	.130	.093	.124	.091	.066	.072	.053	.039	.023	.017	.013	
6.0	.203	.142	.099	.175	.123	.086	.120	.086	.061	.070	.051	.036	.023	.017	.012	
7.0	.196	.136	.093	.169	.118	.081	.117	.082	.058	.068	.049	.034	.022	.016	.011	
8.0	.190	.130	.089	.163	.113	.078	.113	.079	.055	.066	.047	.033	.021	.015	.011	
9.0	.184	.125	.086	.158	.109	.075	.110	.076	.053	.064	.045	.032	.021	.015	.010	
10.0	.178	.121	.083	.153	.105	.072	.106	.074	.051	.062	.044	.031	.020	.014	.010	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm										
NAME: NMS1217-Plus					TYPE:			WEIGHT:		
SPEC.:NMS1217-9WW24NSN050CC0100-Plus					DIM.: 1000*12*17			SERIAL No.:		
MFR.: COLORS					SUR.:1000*12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.1	25.5	24.5	25.9	26.2	23.2	24.7	23.6	25.0	25.3
3H	26.0	27.4	26.5	27.7	28.1	24.7	26.0	25.1	26.4	26.8
4H	27.0	28.2	27.4	28.6	29.0	25.3	26.5	25.7	26.9	27.4
6H	27.9	29.1	28.3	29.5	29.9	25.7	26.9	26.1	27.3	27.7
8H	28.3	29.5	28.8	29.9	30.3	25.8	26.9	26.2	27.4	27.8
12H	28.8	29.9	29.3	30.3	30.8	25.8	27.0	26.3	27.4	27.9
4H 2H	24.7	26.0	25.1	26.3	26.8	24.0	25.3	24.4	25.7	26.1
3H	26.8	27.9	27.3	28.4	28.8	25.7	26.8	26.2	27.3	27.7
4H	27.9	28.9	28.4	29.4	29.9	26.5	27.5	26.9	27.9	28.4
6H	29.0	29.9	29.5	30.4	30.9	27.0	27.9	27.5	28.4	28.9
8H	29.5	30.4	30.0	30.9	31.4	27.2	28.0	27.7	28.5	29.1
12H	30.1	30.9	30.6	31.4	32.0	27.3	28.1	27.8	28.6	29.2
8H 4H	28.2	29.0	28.7	29.5	30.1	27.0	27.8	27.5	28.3	28.9
6H	29.5	30.2	30.0	30.7	31.3	27.7	28.5	28.3	29.0	29.6
8H	30.2	30.8	30.7	31.4	32.0	28.1	28.7	28.6	29.2	29.9
12H	31.0	31.5	31.5	32.1	32.7	28.3	28.8	28.9	29.4	30.0
12H 4H	28.2	29.0	28.8	29.5	30.1	27.1	27.8	27.6	28.3	28.9
6H	29.6	30.2	30.1	30.7	31.4	28.0	28.6	28.5	29.1	29.7
8H	30.3	30.9	30.9	31.4	32.1	28.4	28.9	29.0	29.5	30.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 458.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	53	42	35	51	41	34	28
0.80	64	51	44	62	51	44	60	50	43	36
1.00	72	60	52	70	59	52	67	60	51	43
1.25	79	68	60	77	67	59	74	65	58	50
1.50	84	73	66	82	72	65	78	70	63	55
2.00	91	81	74	88	80	73	84	77	71	62
2.50	95	86	80	92	85	78	87	81	76	66
3.00	98	91	85	96	89	83	91	85	80	70
4.00	103	96	91	100	94	89	94	89	85	74
5.00	105	100	95	102	97	93	96	92	89	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

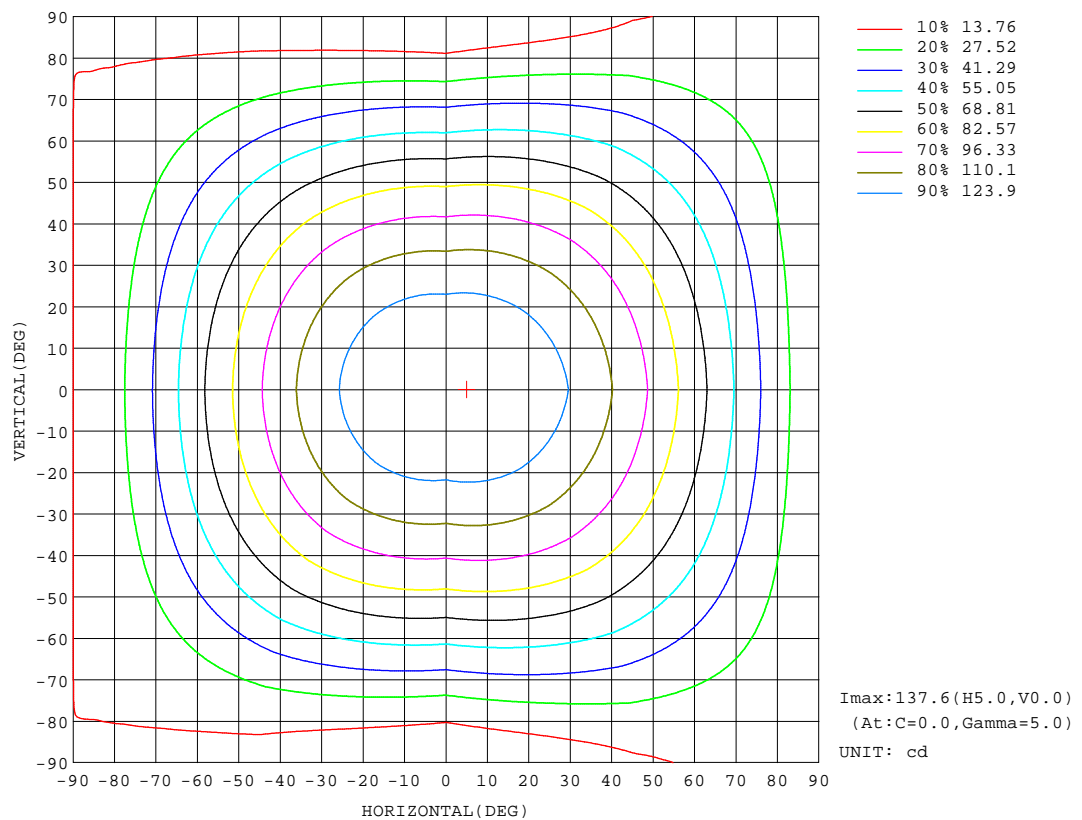


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

Flux out:291.9 lm

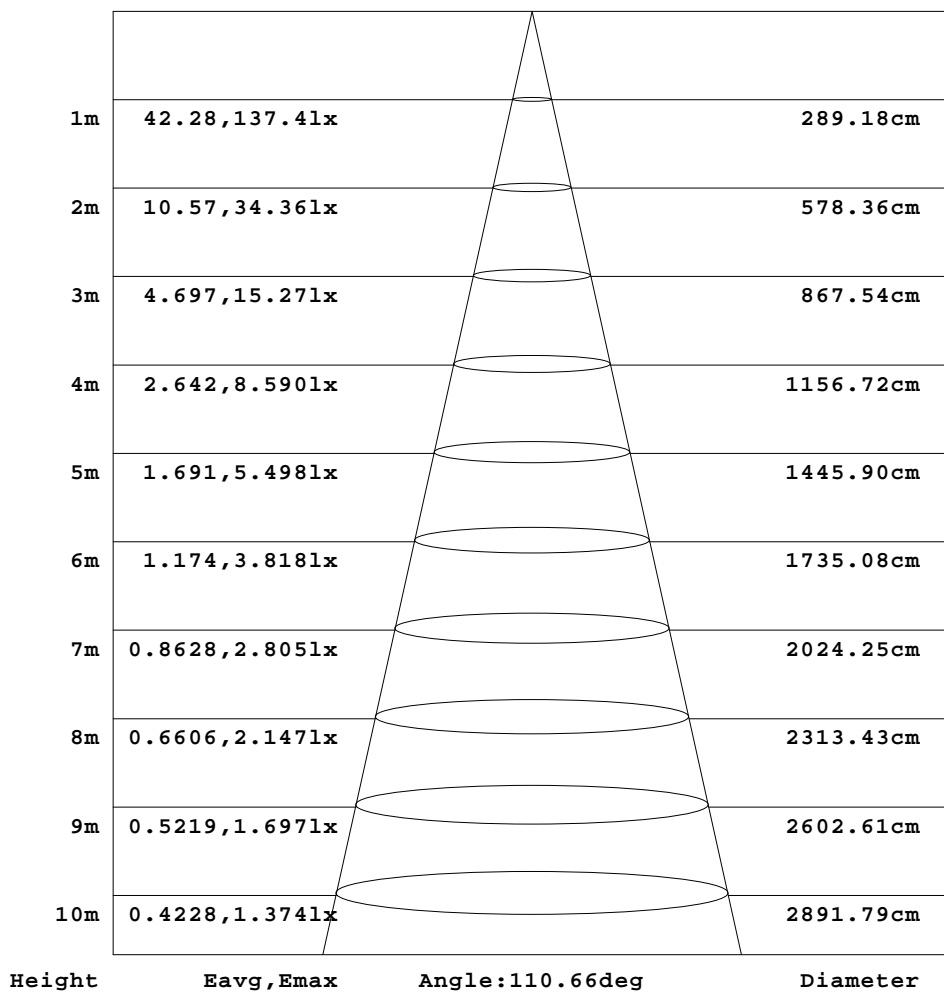


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

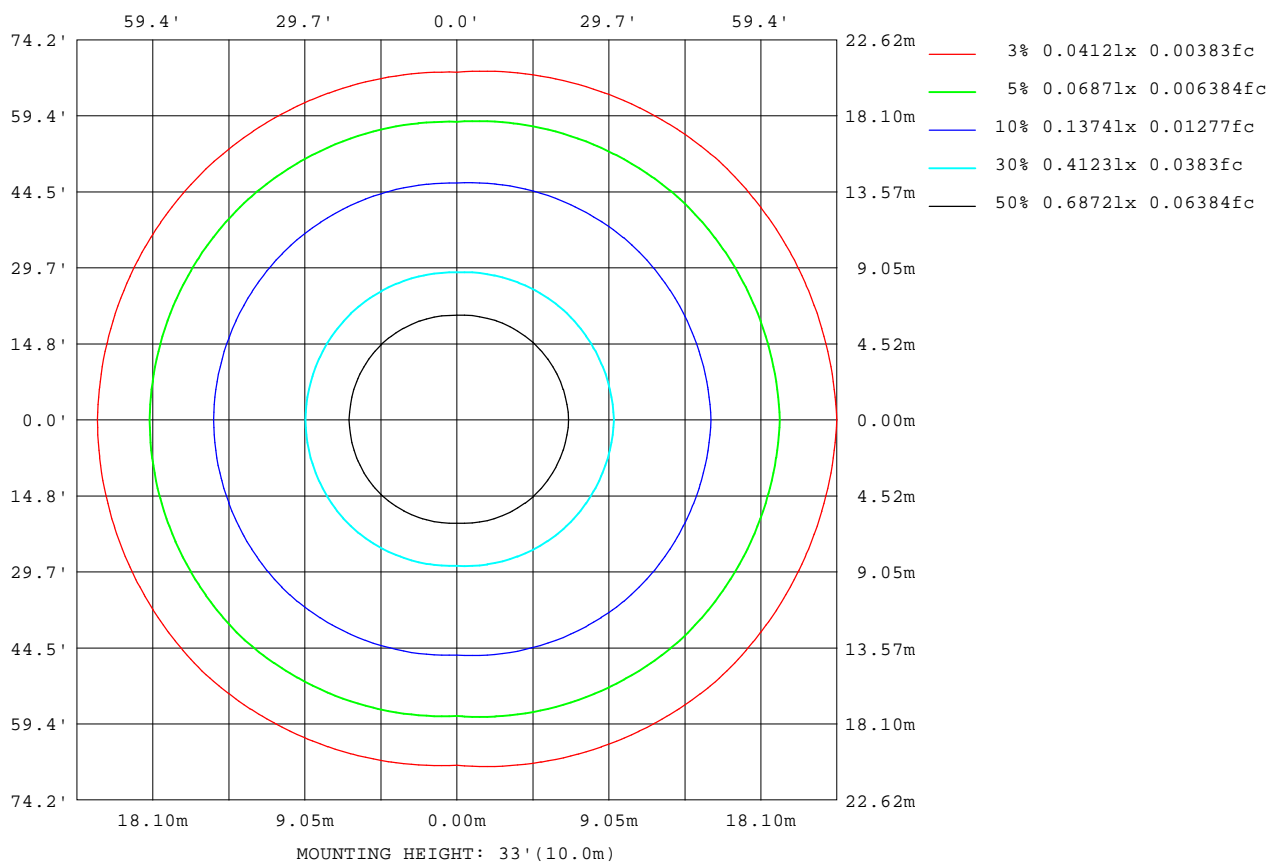

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	11709
L_0~180(75)av	12216
L_0~180(85)av	19667
L_90~270(65)av	9391
L_90~270(75)av	8165
L_90~270(85)av	6215
L_45(65)av	10955
L_45(75)av	10915
L_45(85)av	15157

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

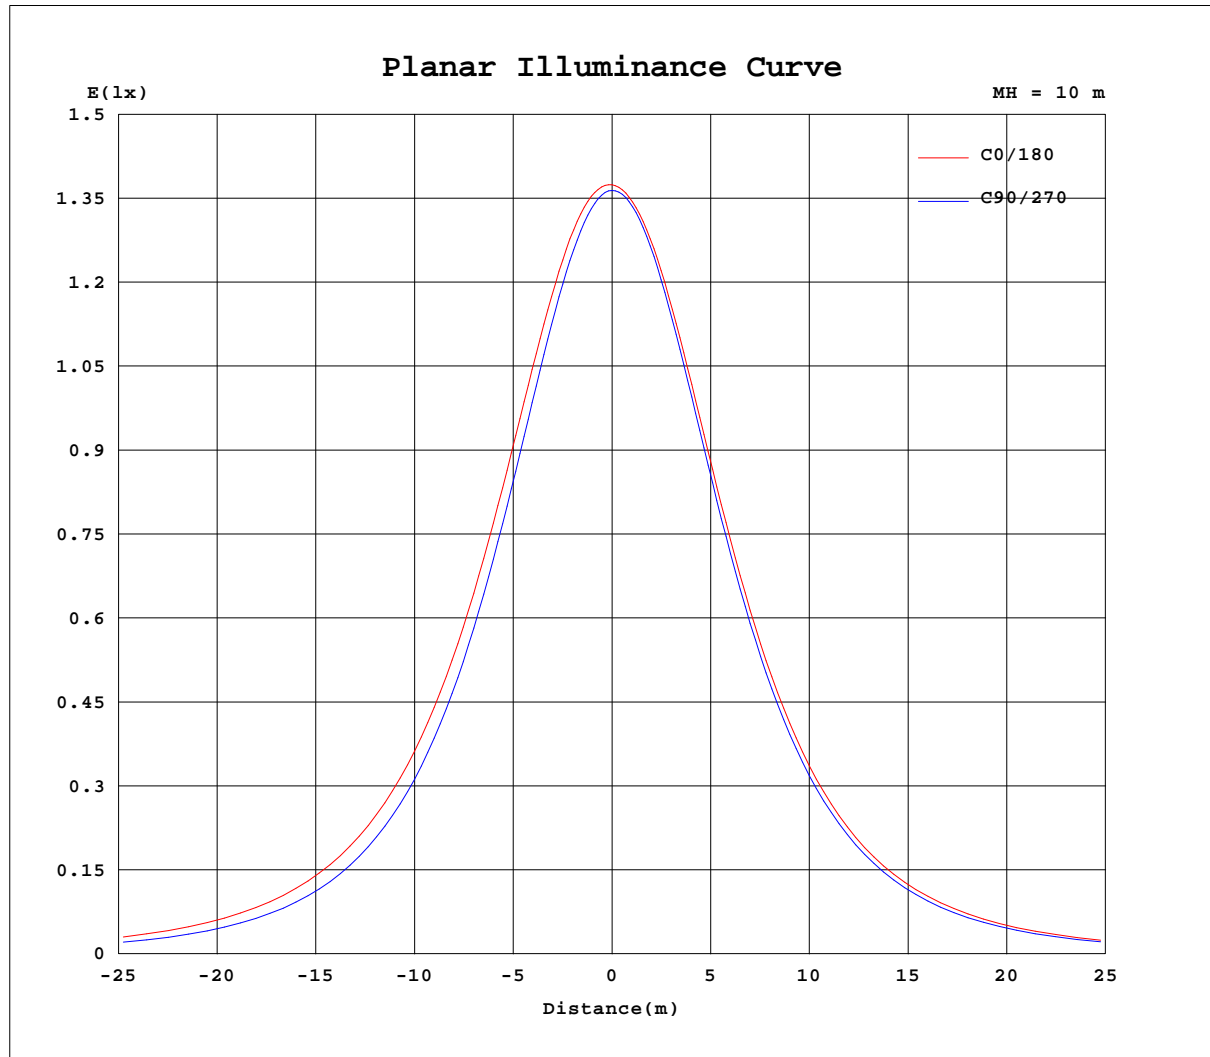

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: COLORS
Test Date: 2019-10-23

deg Range: 0 - 180DEG
deg Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4190A P:10.00W PF:0 Freq:1.000Hz Lamp Flux:458.18x1 lm		
NAME: NMS1217-Plus	TYPE:	WEIGHT:
SPEC.:NMS1217-9WW24NSN050CC0100-Plus	DIM.: 1000*12*17	SERIAL No.:
MFR.: COLORS	SUR.:1000*12	Shielding Angle:

Table--1

UNIT: cd

C(DEC) g (DEC)	0	45	90	135	180	225	270	315										
0	137	137	136	136	137	137	136	136										
5	138	136	136	136	137	136	136	136										
10	137	135	134	134	135	135	134	135										
15	135	133	130	132	133	132	131	133										
20	132	129	126	128	129	128	127	130										
25	129	125	120	123	125	123	122	125										
30	123	119	113	117	119	117	115	120										
35	117	113	106	110	112	110	108	113										
40	110	105	97.5	102	104	102	99.3	106										
45	103	97.1	88.5	93.9	95.1	93.6	90.2	97.5										
50	94.0	88.2	78.9	84.6	85.6	83.9	80.5	88.6										
55	84.7	78.8	68.8	74.6	75.5	73.7	70.1	79.1										
60	75.0	68.9	58.1	64.2	65.0	62.9	59.3	69.1										
65	64.7	58.6	47.1	53.3	54.1	51.8	48.2	58.6										
70	54.0	47.9	35.9	42.2	43.1	40.6	36.9	47.9										
75	43.4	37.2	24.8	31.4	32.5	29.8	26.0	37.2										
80	33.2	27.0	14.4	21.5	23.1	20.1	15.8	27.1										
85	24.4	18.1	5.85	14.0	16.7	12.8	7.15	18.6										
90	18.3	12.5	2.02	10.6	13.8	9.73	2.50	13.2										
95	15.5	10.2	1.31	9.48	12.6	9.03	1.29	11.2										
100	14.6	10.1	0.46	8.96	12.0	8.68	0.32	9.91										
105	13.9	9.40	0.48	8.55	11.5	8.16	0.48	9.24										
110	13.2	8.86	0.61	7.98	11.0	7.42	0.63	7.42										
115	12.3	7.57	0.77	6.70	10.4	6.08	0.78	6.48										
120	11.2	6.61	0.96	5.34	9.51	4.97	0.90	6.50										
125	10.5	6.13	1.04	4.98	8.32	4.63	1.02	5.89										
130	9.46	5.20	1.17	4.50	7.08	4.01	1.14	5.09										
135	8.42	4.23	1.27	2.67	6.02	2.27	1.23	4.11										
140	7.16	2.96	1.37	1.82	5.21	1.59	1.32	2.54										
145	4.46	1.79	1.46	1.78	3.81	1.60	1.38	1.48										
150	2.42	1.70	1.58	1.82	2.30	1.68	1.49	1.48										
155	2.06	1.74	1.68	1.87	1.89	1.81	1.67	1.58										
160	2.10	1.81	1.83	1.96	1.92	1.84	1.83	1.63										
165	2.11	1.94	2.01	2.04	1.92	1.92	2.00	1.82										
170	2.02	2.10	2.12	2.10	1.92	2.01	2.16	2.00										
175	1.93	2.26	2.29	2.24	1.92	2.16	2.33	2.21										
180	1.96	2.32	2.44	2.40	2.00	2.32	2.44	2.40										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: