

24VDC PLUG-IN ELECTRONIC POWER SUPPLY

FOR SLIMEDGE™ AND LARC6 FIXTURES ONLY

GM Lighting®

Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

A 24VDC constant voltage, 24W and 36W power supply that is especially suitable for GM Lighting LED SlimEdge and LARC6 undercabinet LED fixtures. 60" cord and 2-prong plug.

NOTE: If using the SlimEdge or LARC6 touch dimmer (TD), you must use these power supplies only.



FEATURES

- For SlimEdge and LARC6 fixtures
- 24VDC constant voltage output
- 120V input
- Plug-in
- Cooling by air convection



SPECIFICATIONS

ELECTRICAL

- 24VDC output
- 120V input
- 24W or 36W

CERTIFICATION

- UL

OPERATING TEMP

- -4°F - 107°F

WARRANTY


- 5-year warranty

ORDERING INFORMATION

Example: DPPS-24W-24V

Model	Description
DPPS-24W-24V	24V - 24W - Class 2 power supply with cord and plug for LARC6 and Slim Edge only
DPPS-36-24V	24V - 36W - Class 2 power supply with cord and plug for LARC6 and Slim Edge only

DIMENSIONS

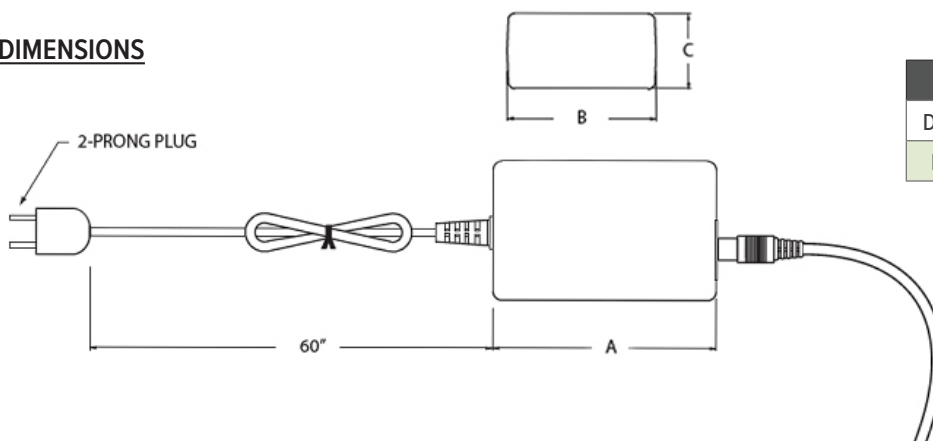

Model	A	B	C
DPPS-24W-24V	4.25"	2"	1.5"
DPPS-36-24V	4.25"	2"	1.5"