

120V 90+ CRI Surface Mount
Wet Location LED Light Squares

Project Name

Type

Catalog #

Date

PRODUCT OVERVIEW

GeoTask™ 120V 90 CRI Wet Location LED Surface Mount Light Squares are perfect for accent lighting, hospitality lighting, task lighting, light mosaics, entertainment centers kitchen, bath and vanity, residential and commercial lighting. Complies with ADA when wall mounted.



FEATURES

- 5CCT Selectable: 2700K / 3000K / 3500K / 4000K / 5000K
- 120V
- Dimmable (Triac)
- Shallow profile
- Mounts to standard J-Box
- Wet Location (ceiling mount only)
- ADA Compliant (wall mounted)
- Edge-Lit Technology for diode-free illumination

SPECIFICATIONS

ELECTRICAL

- 120V
- 10W / 15W / 22W

CERTIFICATIONS

- ETL
- Title 24 / JA8

PHOTOMETRIC


- 90+ CRI
- 5CCT Selectable:
2700K / 3000K / 3500K / 4000K / 5000K

OPERATING TEMP

- -4°F to 104°F (-20°C to 40°C)

WARRANTY

- 5 years

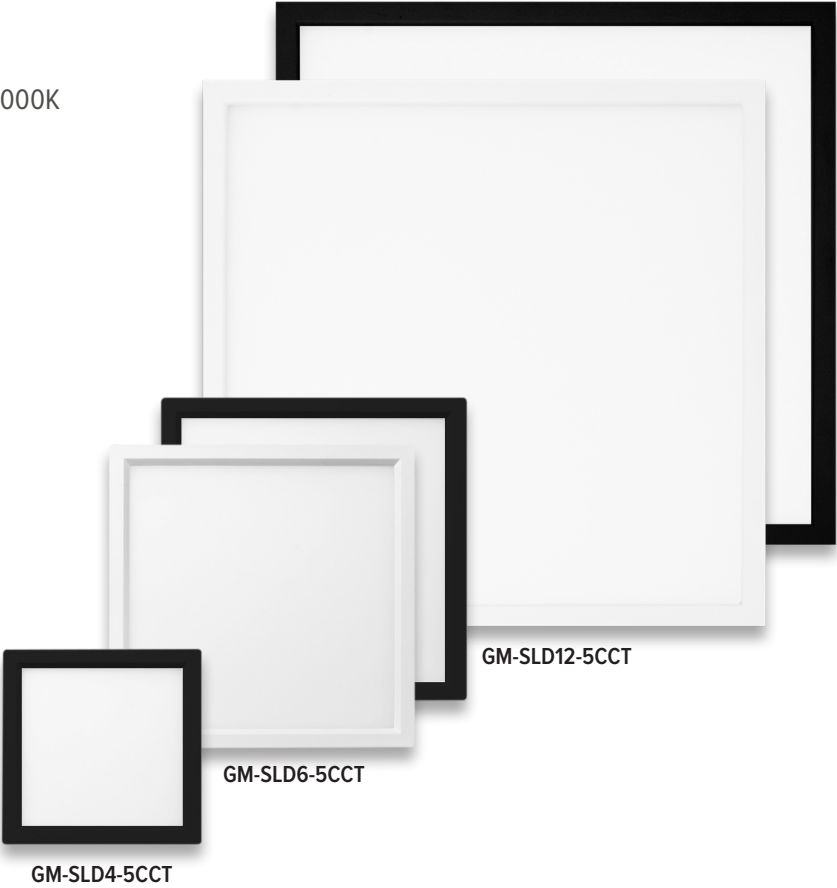

ORDERING INFORMATION



EXAMPLE: GM-SLD6-5CCT-WH

Catalog No.	Size	Color Temp	Finish
GM-SLD	4" Diameter	5CCT Selectable: 2700K / 3000K / 3500K / 4000K / 5000K	BK (Black)
	6" Diameter		WH (White) / BK (Black)
	12" Diameter		WH (White) / BK (Black)


PHOTOMETRIC INFORMATION

Catalog No.	Wattage	2700K	3000K	3500K	4000K	5000K
GM-SLD4-5CCT	10W	769 lm	783 lm	801 lm	807 lm	811 lm
GM-SLD6-5CCT	15W	1238 lm	1279 lm	1349 lm	1345 lm	1302 lm
GM-SLD12-5CCT	22W	1250 lm	1297 lm	1363 lm	1372 lm	1302 lm

DIMENSIONS

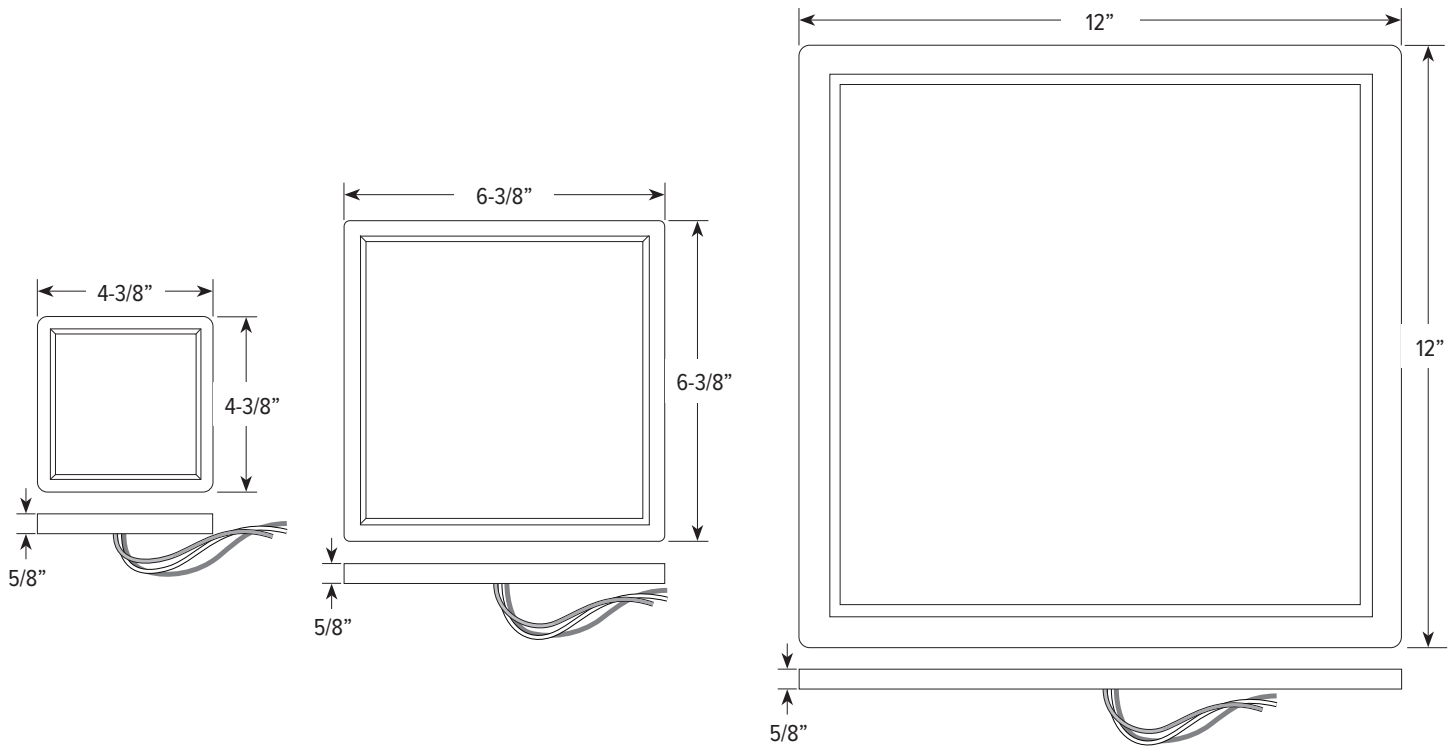

Standard
Junction Box
(Not Included)

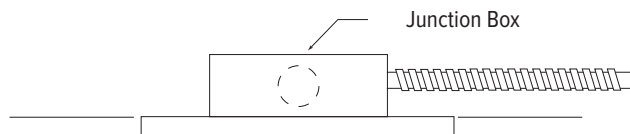

NOTE: Mounts to 2-3/4" or 3-1/2" standard junction box

NOTES:

12" not compatible with mud in ring or pancake box

Fixture has gasket to seal at outer edge for smooth surfaces. For improved seal against water entry or for uneven surfaces, use silicone sealant to fill gaps between the fixture and mounting surface.