

Lamina

24VDC Configural Laminated Sheet

| | |
|--------------|------|
| Project Name | Type |
| Catalog # | Date |

PRODUCT OVERVIEW

Lamina is a 24VDC flexible light sheet that can be cut in the field into geometric or irregular shapes, creating limitless illumination for signage, light panels, retail display, backlighting and themed lighting applications. Easy installation with no heat sink required. Standard 12" x 12" sheets make it easy to plan your layout and install (see next page).



FEATURES

- Flexible - conforms to curvilinear shapes like round columns
- Dimmable
- 12" x 12" with 48" leads and sheet to sheet connectors
- 1/8" depth
- Connectible via integral push-in connectors
- 3M backing layer adheres to most flat or curved surfaces
- 3M tape, staple or screw mounting options
- Invisible Stand-Off support option allows even illumination with translucent panels (easily raises diffusion translucent panels 0.91" - 2.0" above Lamina. For horizontal surface use only).
- Not intended for outdoor use
- Operating temp. -4°F - 122°F*

SPECIFICATIONS

ELECTRICAL

- 24VDC
- SO: 5W / Sq. Ft.
HO: 10W / Sq. Ft.
- Connectors every 4" around perimeter

LABEL

- ETL
- Closet Rated

OPTICS

- 2700K, 3000K, 3500K, 4000K
- 90+ CRI


WARRANTY

- 5-years

* Do not install in an application that is outside of the products listed ambient temperature and in an area that is not easily accessed for service requirements.



**EVEN ILLUMINATION
FIELD CUT VERSATILITY**

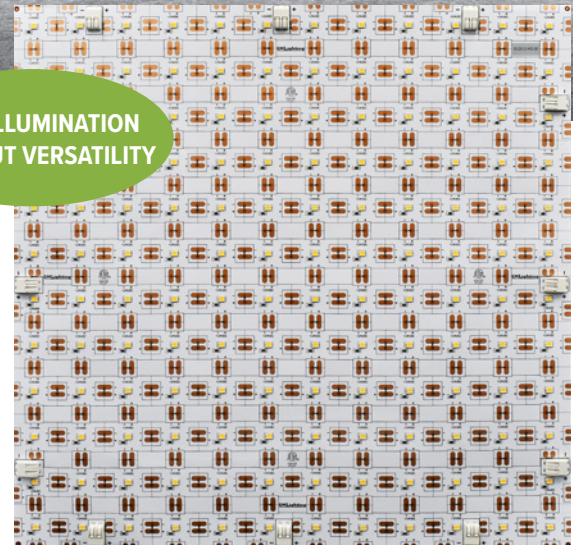


ORDERING INFORMATION

Example: S12X12-HO-30

| Model | Series | Color Temp. |
|--------|---------------|-------------|
| S12X12 | SO (Standard) | 27 (2700K) |
| | | 30 (3000K) |
| | HO (High) | 35 (3500K) |
| | | 40 (4000K) |

CONNECTORS

| Catalog No. | Description |
|-------------|-------------------------------|
| S12X12-SSC | Sheet to Sheet Wire Connector |

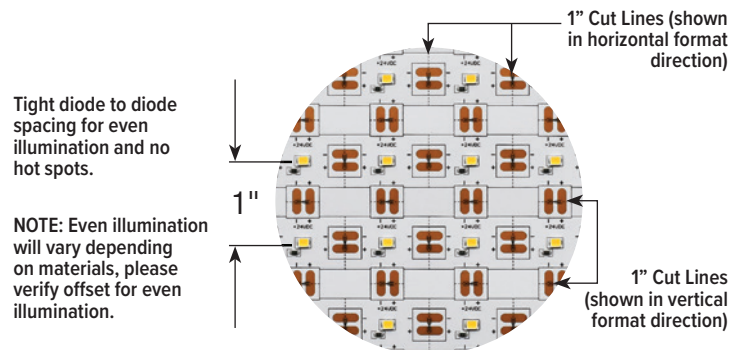

| Catalog No. | Output | Dimension | Watts | Lumens | CRI | Color Temp. |
|--------------|-----------------|-----------|---------------|----------------|-----|-------------|
| S12X12-SO-27 | Standard Output | 12" x 12" | 5W / Sq. Ft. | 500 / Sq. Ft. | 90+ | 2700K |
| S12X12-SO-30 | | | | | | 3000K |
| S12X12-SO-35 | | | | | | 3500K |
| S12X12-SO-40 | | | | | | 4000K |
| S12X12-HO-27 | High Output | | 10W / Sq. Ft. | 1000 / Sq. Ft. | | 2700K |
| S12X12-HO-30 | | | | | | 3000K |
| S12X12-HO-35 | | | | | | 3500K |
| S12X12-HO-40 | | | | | | 4000K |

STAND-OFF ACCESSORIES

| Model | Description | Diameter | Height Range | Max. Load | Recommended Screw Size (not included) |
|----------|--------------------------------|--------------|------------------------------|-----------|---------------------------------------|
| GM-SOC-1 | Clear, Acrylic w/clear 3M tape | 13mm (0.62") | 23mm (0.91") to 33mm (1.30") | 6 lbs. | #6 x 3/4" Pan Head Sheet Metal Screw |
| GM-SOC-1 | Clear, Acrylic w/clear 3M tape | 19mm (0.75") | 36mm (1.42") to 51mm (2.00") | 10 lbs. | #8 x 3/4" Pan Head Sheet Metal Screw |

Note: Stand-offs come in sets of 4

COMPATIBLE CONTROLLERS


| Model | Description |
|--------------------|--|
| SHWC | LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage |
| SHWD | LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage |
| SWD-60W-24VDC-DIM | SwitchLD All-in-One Dimmer and Driver, 60W, 24VDC |
| SWD-100W-24VDC-DIM | SwitchLD All-in-One Dimmer and Driver, 100W, 24VDC |

RECOMMENDED DRIVERS

| Catalog No. | Description | Watts | Specification Sheet |
|-------------|--|--------------------------------------|---------------------|
| LD-ED-UNV | LineDrive Electronic Dimmable Power Supply, 12VDC or 24VDC | 20W, 40W, 60W, 96W, 150W, 200W, 300W | View Spec Sheet |
| LD-E-UNV | LineDrive Electronic Non-Dimmable Power Supply, 12VDC or 24VDC | 30W, 60W, 96W, 200W, 300W | View Spec Sheet |
| LD-MD-UNV | LineDrive Magnetic Dimmable Power Supply, 12VDC or 24VDC | 30W, 60W, 96W, 150W, 200W, 300W | View Spec Sheet |
| LD-EDM | LineDrive Electronic Dimmable MINI Power Supply, 12VDC or 24VDC | 60W | View Spec Sheet |
| LD-ED010 | LineDrive Electronic Dimmable 0-10V Power Supply, 12VDC or 24VDC | 60W, 96W | View Spec Sheet |
| LTP | Cord and Plug Power Supply, 12VDC or 24VDC | 25W, 48W, 60W, 90W | View Spec Sheet |
| PSD | Electronic Dimmable Power Supply, 12VDC or 24VDC | 15W, 24W, 60W, 90W | View Spec Sheet |

Please see our website for updated power supply specifications and information.

LAMINA DIAGRAM

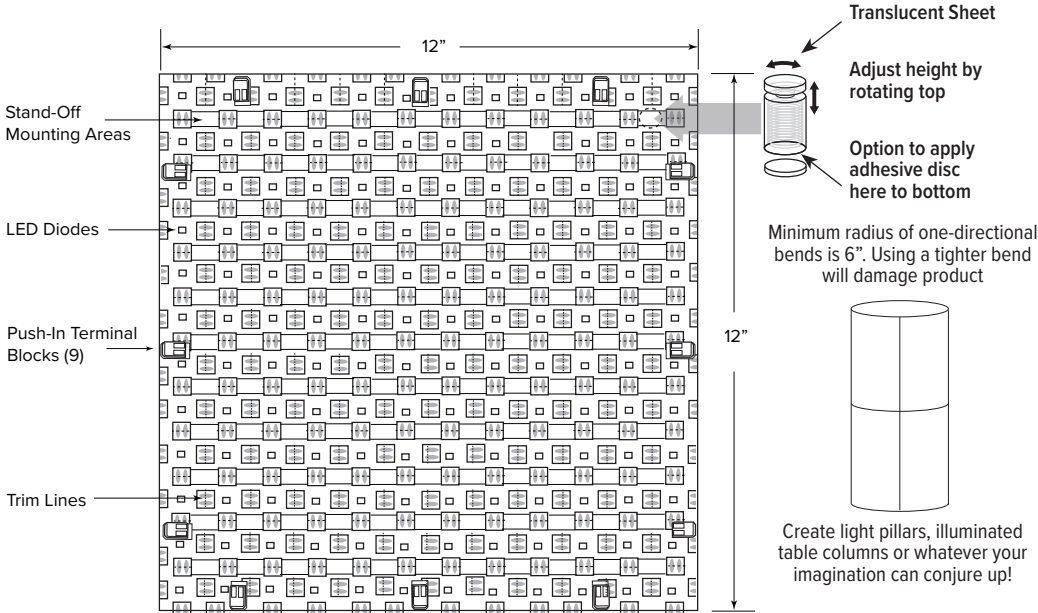

SO: 10 Sheets MAX on a lead
HO: 5 Sheets MAX on a lead


Installation:

Attach stand-off to Lamina board on center with rectangles. Use adhesive disc or #6 screw (by others). Space out as needed to distribute weight of translucent sheet evenly.


CAUTION:

Stand-offs are to be used on top of horizontal surfaces only. Not for vertical wall or ceiling applications.

Create light pillars, illuminated table columns or whatever your imagination can conjure up!

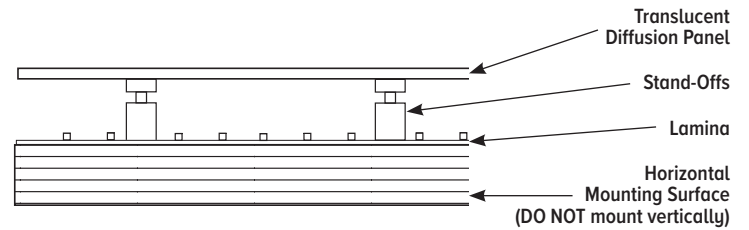

MULTIPLE PANEL CONNECTION DIAGRAM

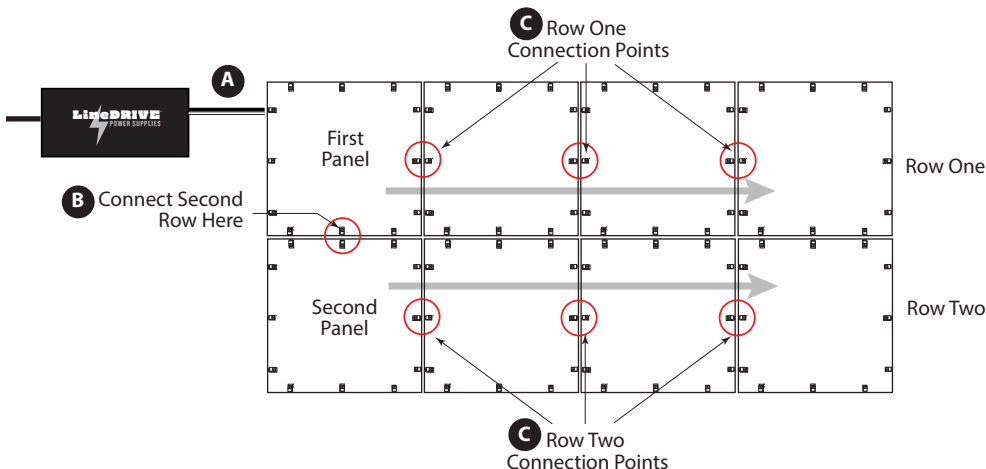




Layout & Wiring Tips (See example):

- A.** Connect power to first panel (1) in group.
- B.** Connect panel in Row Two, making connection between bottom of First Panel and top of first panel in Row Two.
- C.** Connect additional panels in each row as you see in the diagram. Remaining panels are connected in one direction only.

Many other layouts can be created for different shapes depending on panel cuts and position.


SHWC LUXCONTROL WIFI CONTROLLER

**GROUP MULTIPLE
CONTROLLERS IN THE
LUXCONTROL APP**

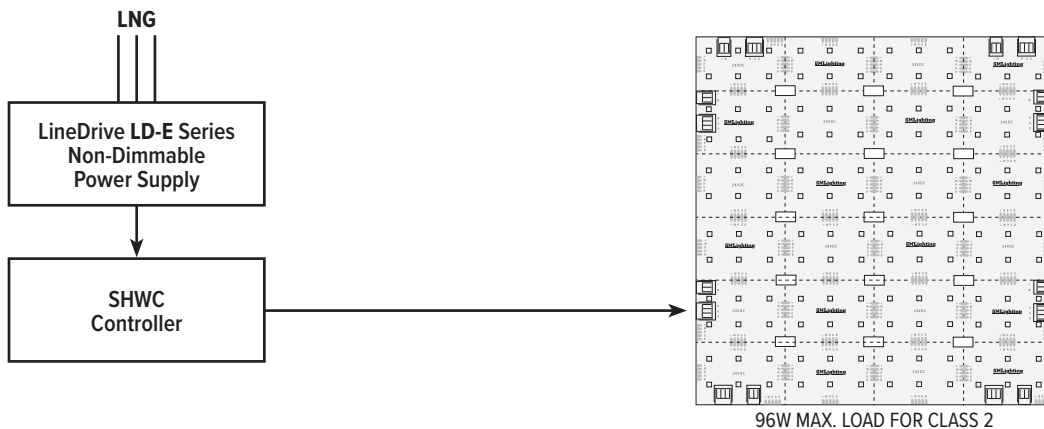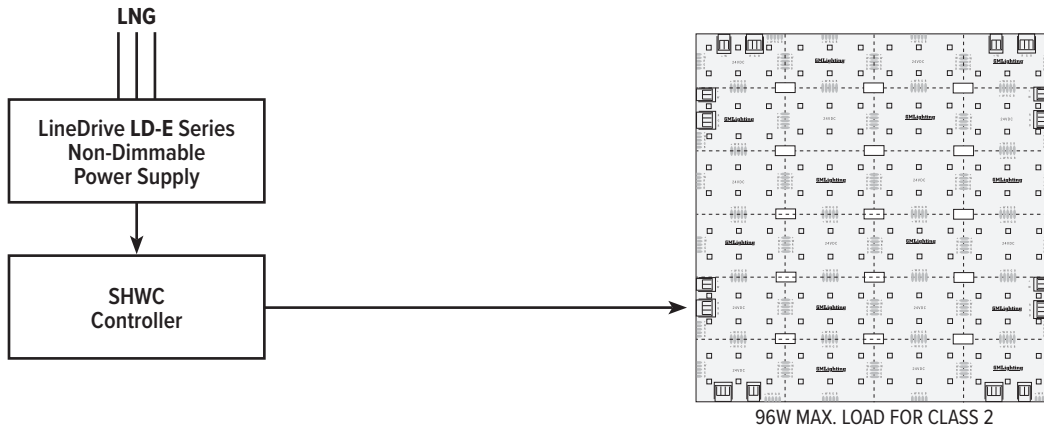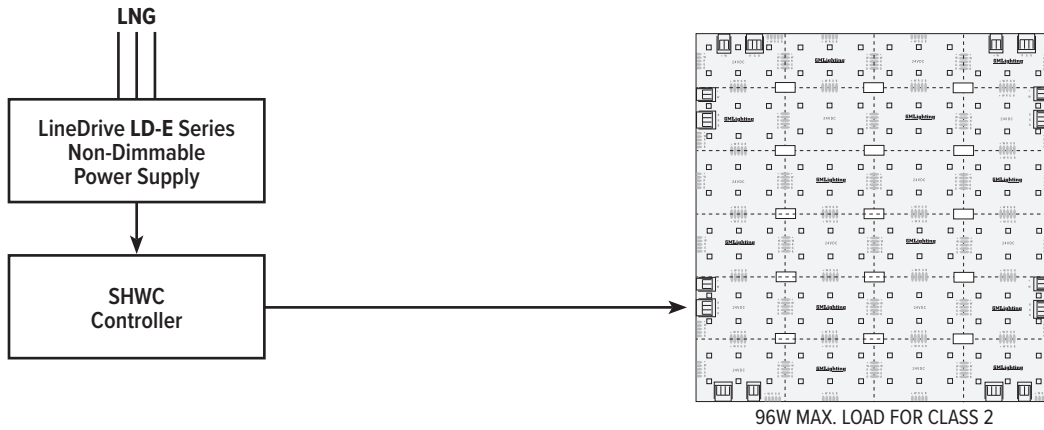


SHWC LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER

THIS CONFIGURATION WILL SHOW UP AS ONE GROUP IN THE LUXCONTROL APP

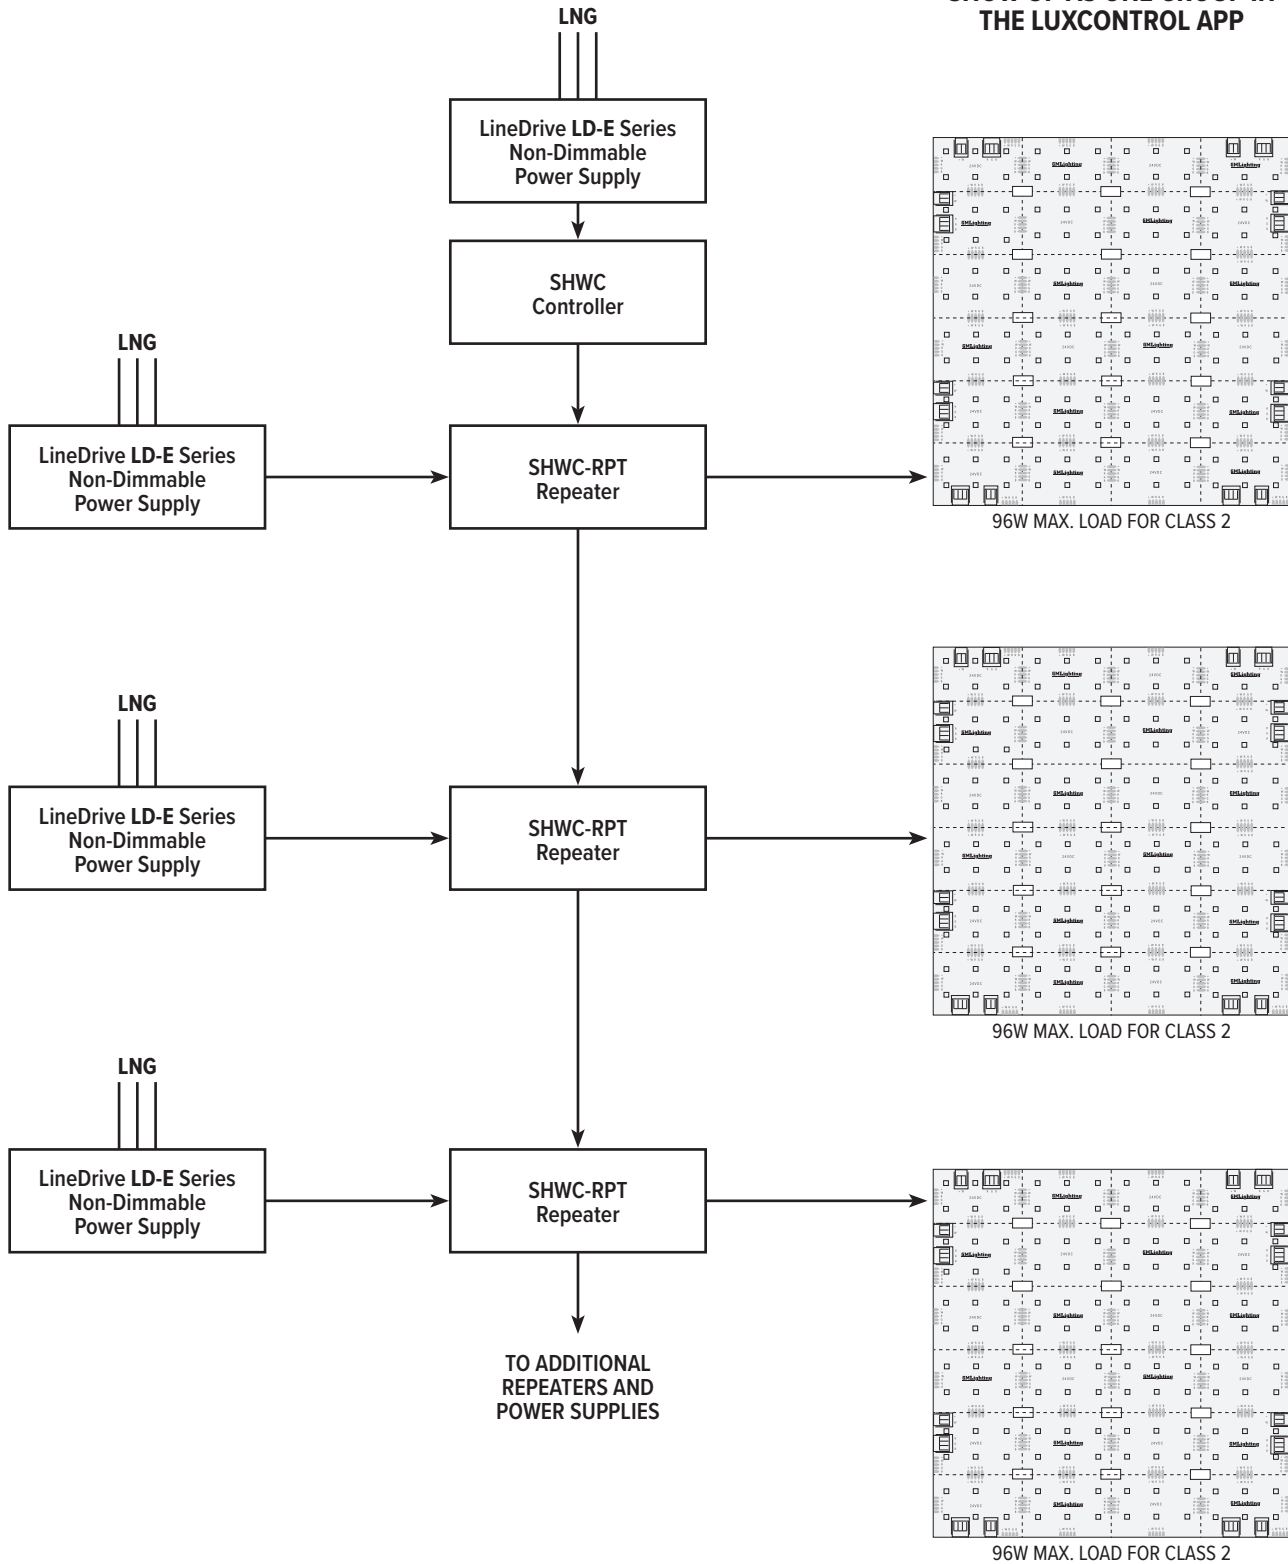

SHWD LUXCONTROL WIFI DIMMER

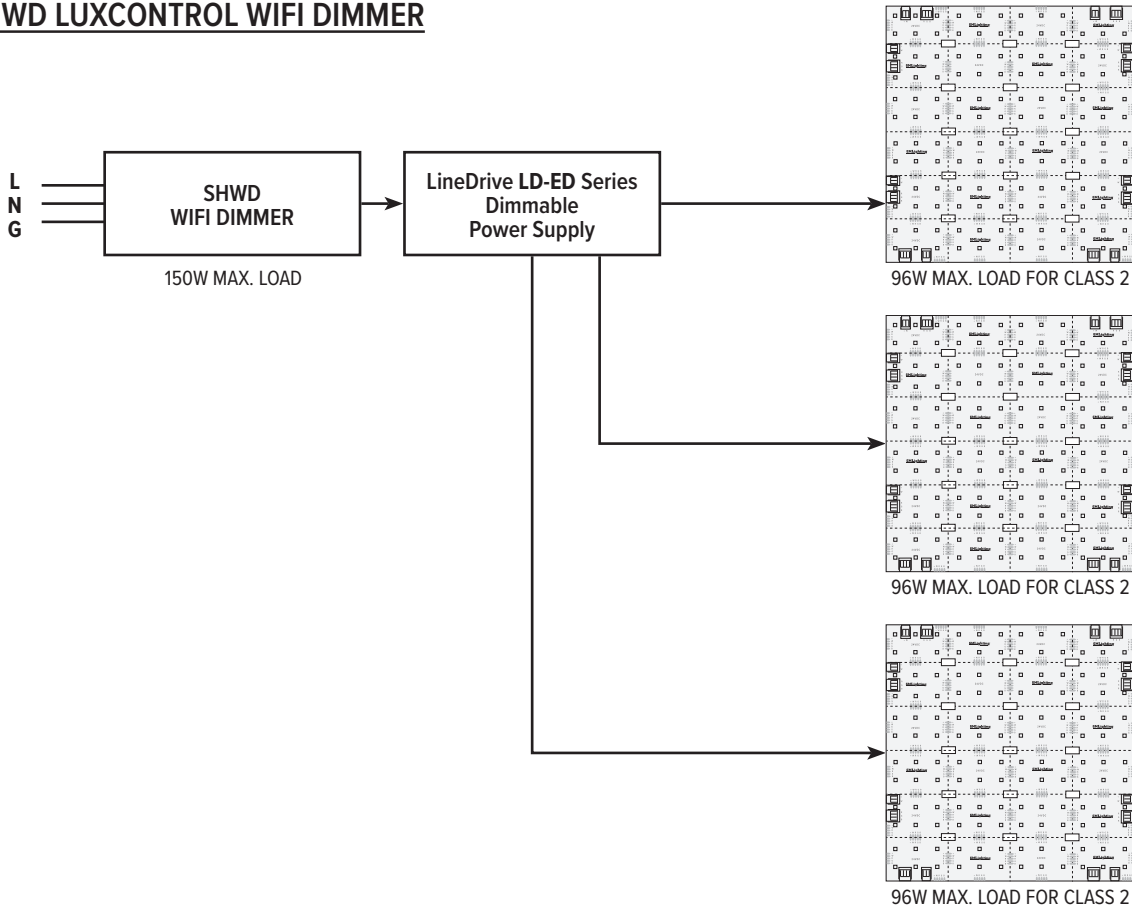

SWITCHLD SWD DRIVER AND DIMMER

