

# NeoVision24 TopFlex

## 24VDC 3W LED Tape Specification Sheet



Project Name	Type
--------------	------

Catalog #	Date
-----------	------


### PRODUCT OVERVIEW

A 24VDC high transmission, flexible linear 'neon' tape that is field cuttable and joinable. Designed for applications that require ultra-rich light and color saturation that is characteristic of neon. TopFlex enables vertical bending that conforms tape around curvilinear surfaces.



### FEATURES

- 24VDC operation
- Wet location - IP65
- Multiple power feed options
- Tape encased in UV stable silicone (UV protected)
- Dimmable
- Wireless control with LUXcontrol App and controller
- 2700K, 3000K, 4000K / Amber, Blue, Green or Red
- 120° viewing angle
- Maximum run: 32'-8"
- Field cuttable and joinable in 2 inch increments while retaining IP65
- Each run requires an end cap (sold separately)
- No tools required for capping and joining
- Mounting clips included (recommend use 1 per foot)

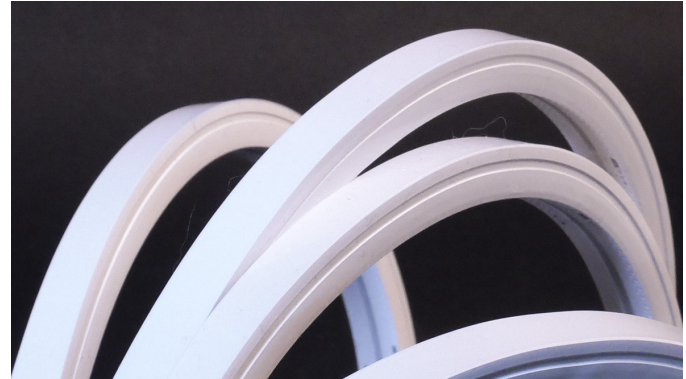

### SPECIFICATIONS

#### ELECTRICAL

- 24VDC
- 3W per foot

#### PHOTOMETRIC

- 90+ CRI

#### WARRANTY



- 5-year warranty when paired with GM power supply

#### CERTIFICATION

- 24VDC UL compliant
- IP65

#### ACCESSORIES

- LineDRIVE 24V Power Supplies
- Aluminum Channels (below)
- Connectors (below)
- Tape Cutting Tool (below)



### ORDERING INFORMATION

Example: NV24T-3W-30K-16

Model	-	Watts / Foot	Color Temp.	Reel Length
NV24T		3W	2700K (27K)	
			3000K (30K)	16 (16'-4")
			4000K (40K)	32 (32'-8")
			Amber (AM)	
			Blue (BL)	
			Green (GR)	
			Red (RD)	



### CONTROLLERS

Model	Description
SHWC	Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, 1-Channel / 2-Wire
SHWC-RGBW-RPT	Universal Smart Power Repeater

### CONNECTORS

Catalog No.	Description
NV24T-PF-EF8	Tape to power flexible end feed - 8 ft. length
NV24T-PF-BF8	Tape to power flexible bottom feed - 8 ft. length
NV24T-SP	Tape to tape splice connector
NV24T-CHL-A4	Aluminum channel - 4 ft. length
NV24T-CHL-A8	Aluminum channel - 8 ft. length
NV24T-MC-A	Aluminum mounting clips (set of 20)

Catalog No.	Description
NV24T-TTC6	Tape to tape 6" flexible connector
NV24T-TTC12	Tape to tape 12" flexible connector
NV24T-TTC24	Tape to tape 24" flexible connector
NV24T-FLEX-CHL	Flexible mounting channel - 39.5"
NV24-CT	Tape cutting tool
NV24T-EC	End cap

The above connectors, channels, mounting clips and caps are for the exclusive use of NeoVision24 TopFlex Neon Tape and are ordered separately. See website for accessory images.



# NeoVision24 TopFlex


## 24VDC 3W LED Tape Specification Sheet



Catalog No.	Length	Lumens per Foot	CRI	Color Temp.	Max. Run
NV24T-3W-27K-16	16'-4"	215	90+	2700K	32'-8"
NV24T-3W-27K-32	32'-8"	215	90+	2700K	32'-8"
NV24T-3W-30K-16	16'-4"	230	90+	3000K	32'-8"
NV24T-3W-30K-32	32'-8"	230	90+	3000K	32'-8"
NV24T-3W-40K-16	16'-4"	215	90+	4000K	32'-8"
NV24T-3W-40K-32	32'-8"	215	90+	4000K	32'-8"
NV24T-3W-AM-16	16'-4"	N/A	90+	AMBER	32'-8"
NV24T-3W-AM-32	32'-8"	N/A	90+	AMBER	32'-8"
NV24T-3W-BL-16	16'-4"	N/A	90+	BLUE	32'-8"
NV24T-3W-BL-32	32'-8"	N/A	90+	BLUE	32'-8"
NV24T-3W-GR-16	16'-4"	N/A	90+	GREEN	32'-8"
NV24T-3W-GR-32	32'-8"	N/A	90+	GREEN	32'-8"
NV24T-3W-RD-16	16'-4"	N/A	90+	RED	32'-8"
NV24T-3W-RD-32	32'-8"	N/A	90+	RED	32'-8"

Kelvin temperature (color) ±100K.

Every reel includes (1) NV24T-PF-EF (tape to power feed with 48" of lead.). 16' reel includes (16) NV24T-MC-A mounting clips and screws. 32' reel comes with (32) NV24T-MC-A mounting clips and screws. Operating temp.: -4° - 130°F.

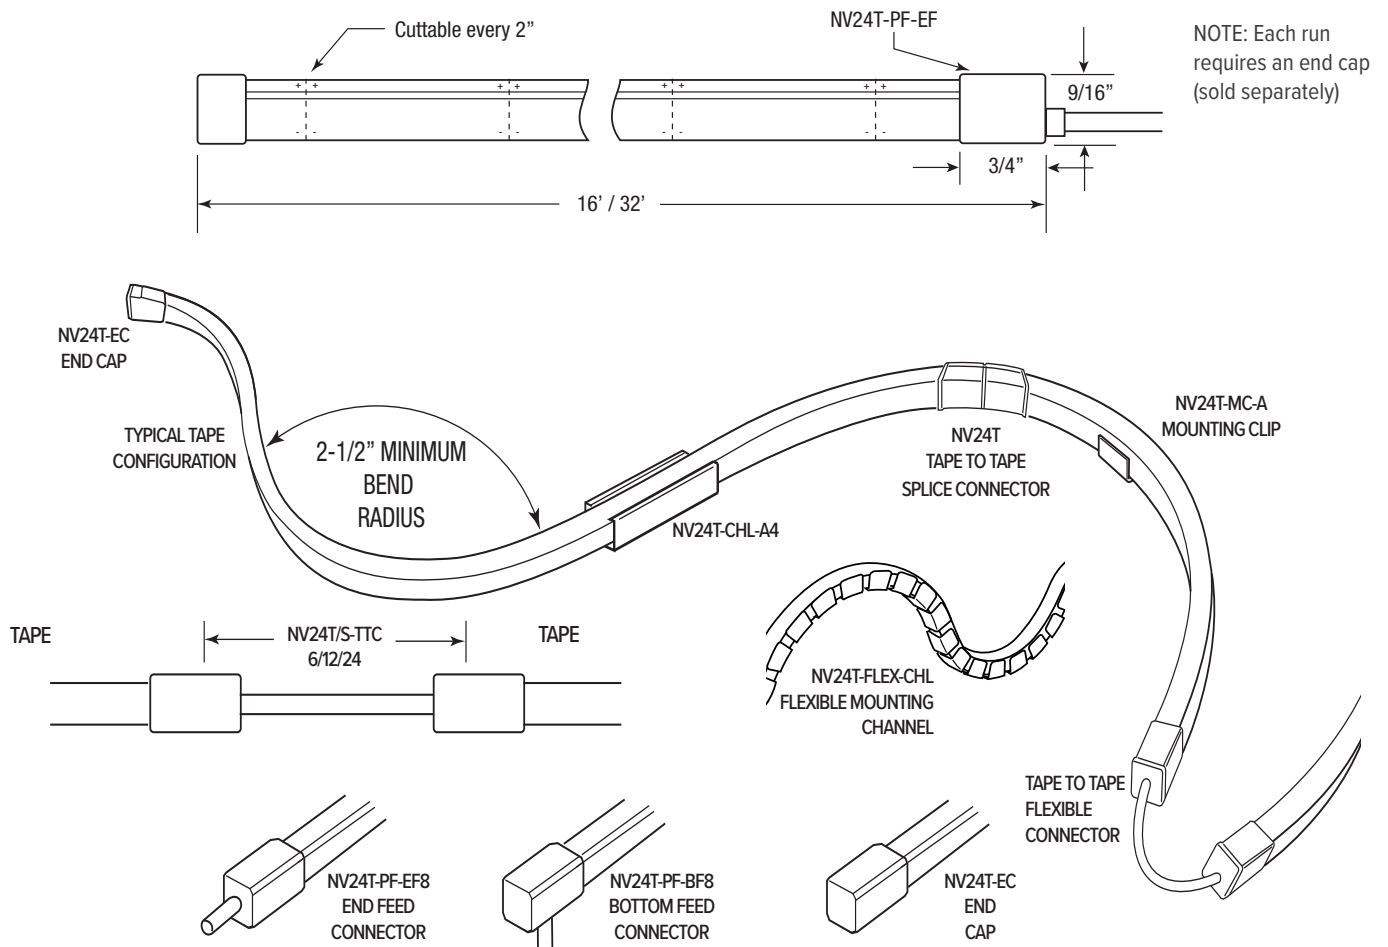


# NeoVision24 TopFlex

## 24VDC 3W

### LED Tape Specification Sheet





#### WIRING DIAGRAM

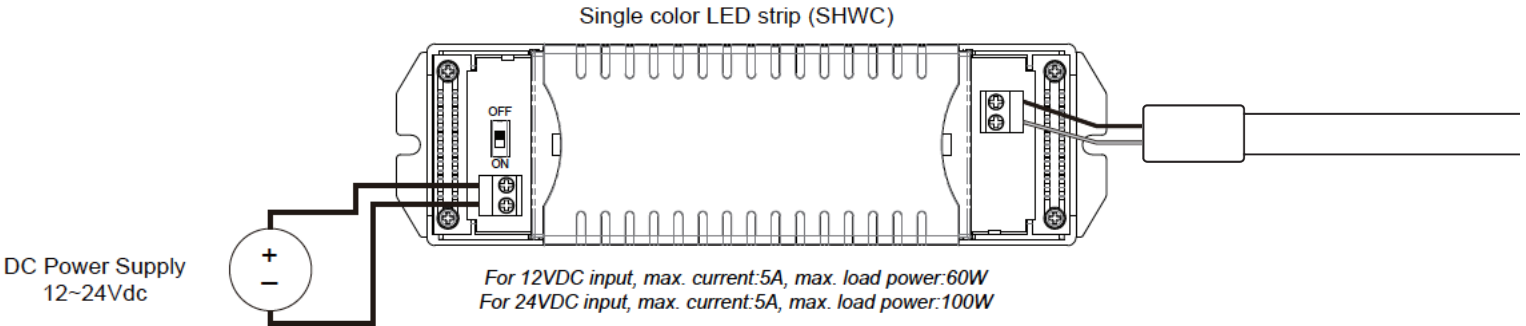


#### SHWC and Repeater Wiring

Single color connection (1 channel)

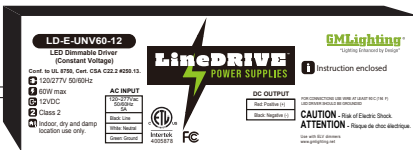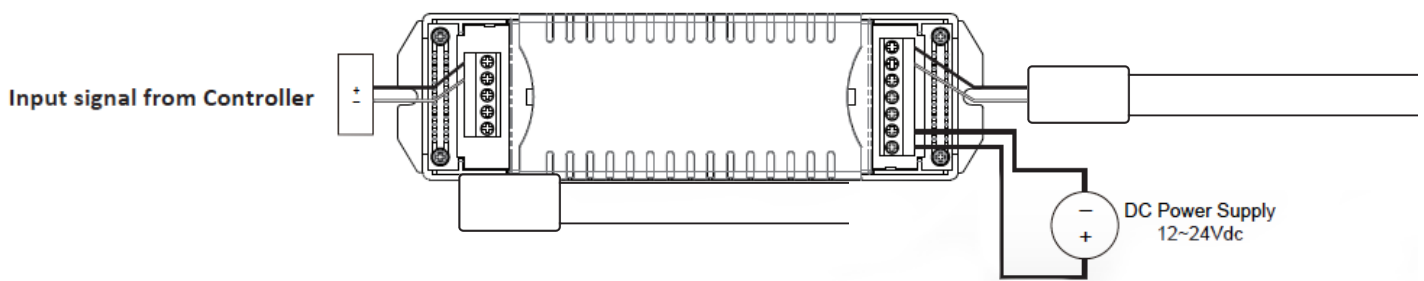

#### NeoVision24™ LED Tape

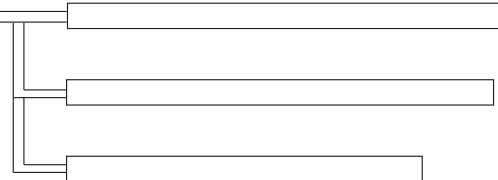

Remote WiFi Control



Expandable with universal power repeater (SHWC-RGBW-RPT) for larger projects

Note: For use with LD-E (non-dimmable) or LD-ED (dimmable) power supply only. Not compatible with LD-MD (magnetic) power supply.




# NeoVision24 TopFlex

24VDC 3W

## LED Tape Specification Sheet



### SHWC LUXCONTROL WIFI CONTROLLER

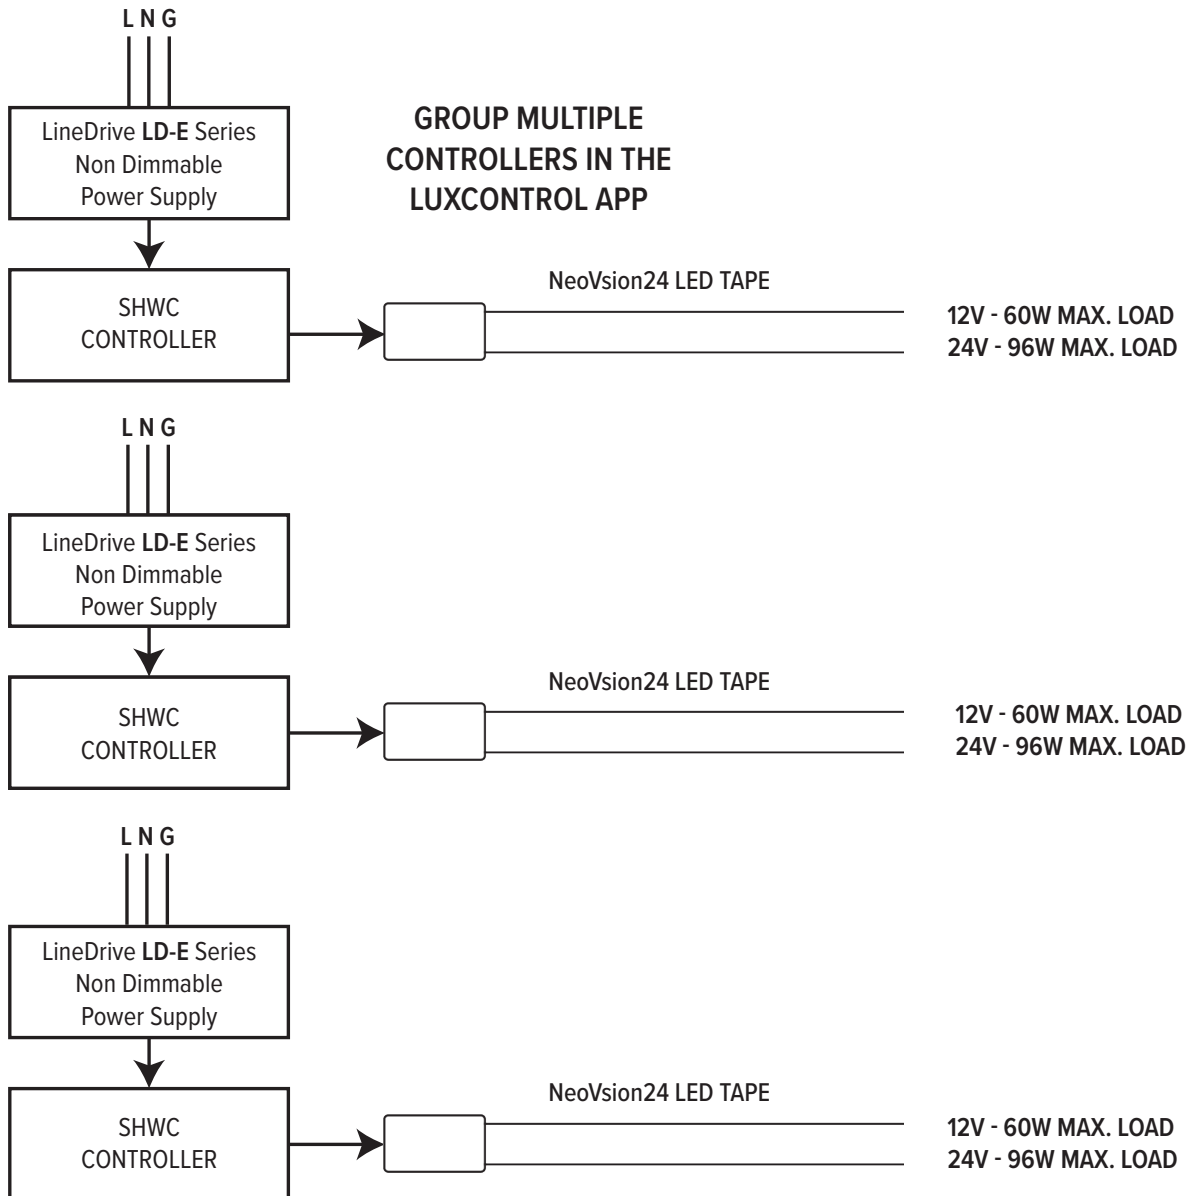


# NeoVision24 TopFlex

## 24VDC 3W

### LED Tape Specification Sheet

#### SHWC LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER

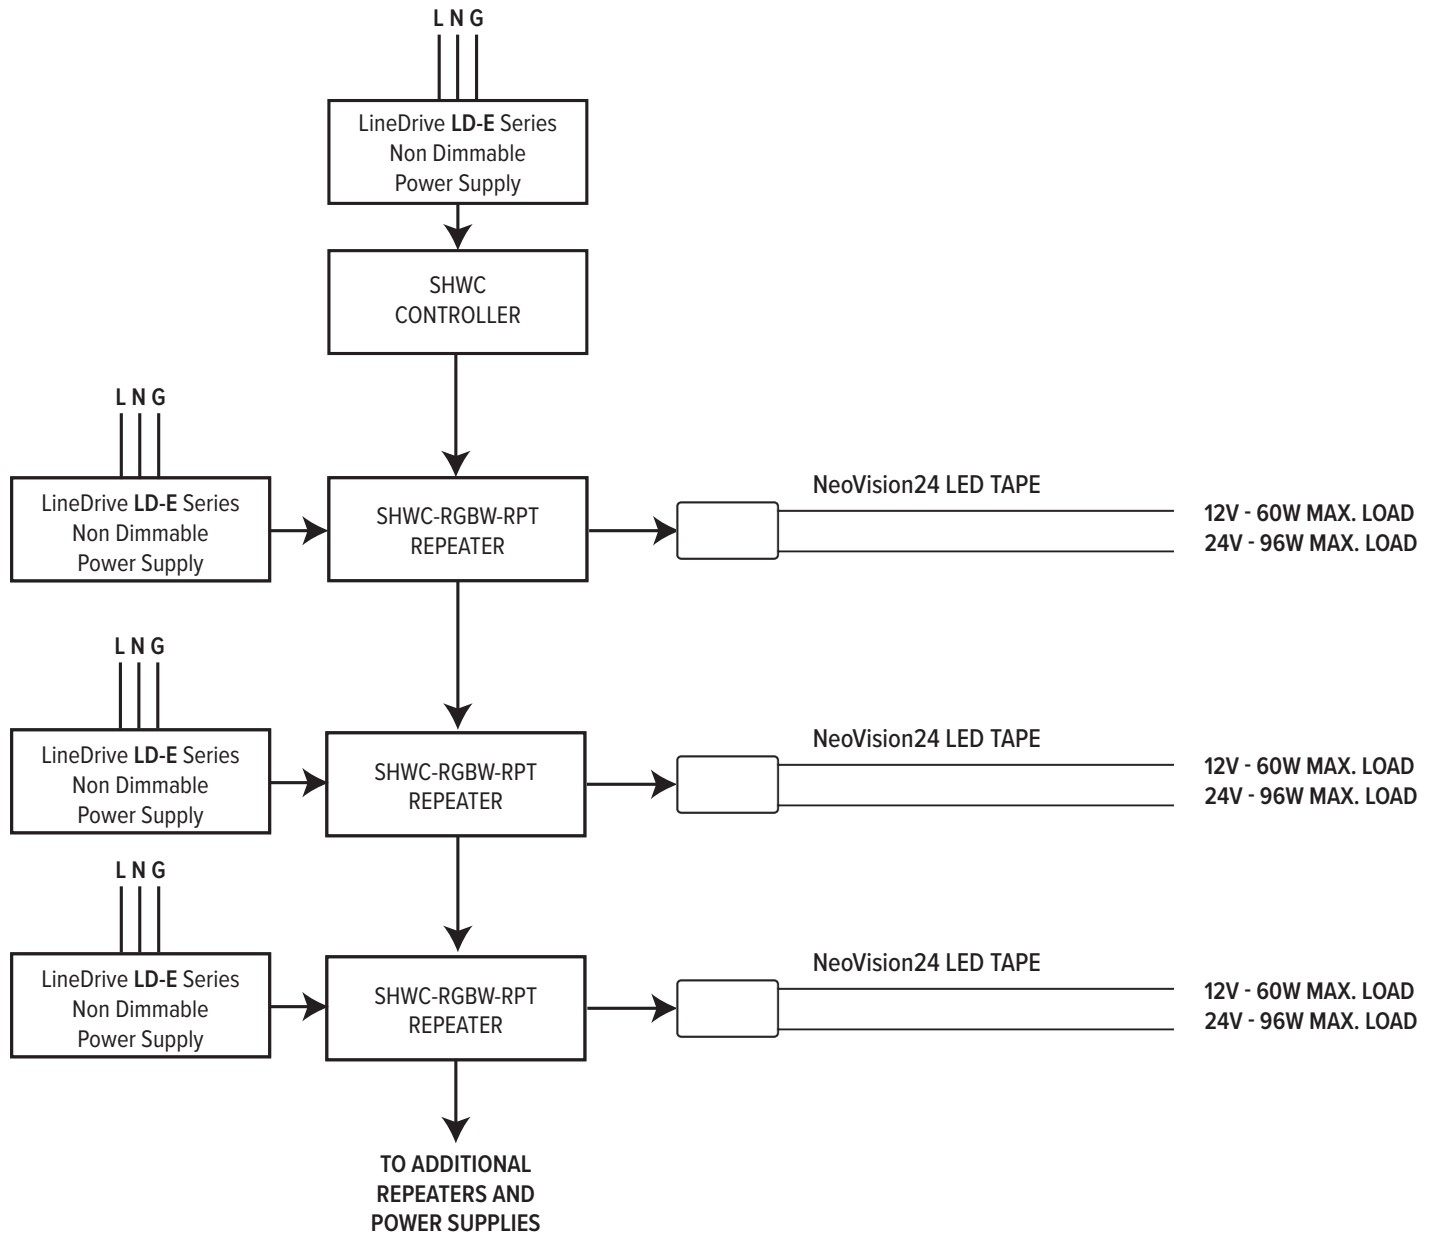


# NeoVision24 TopFlex

24VDC 3W

## LED Tape Specification Sheet



### SHWD LUXCONTROL WIFI DIMMER

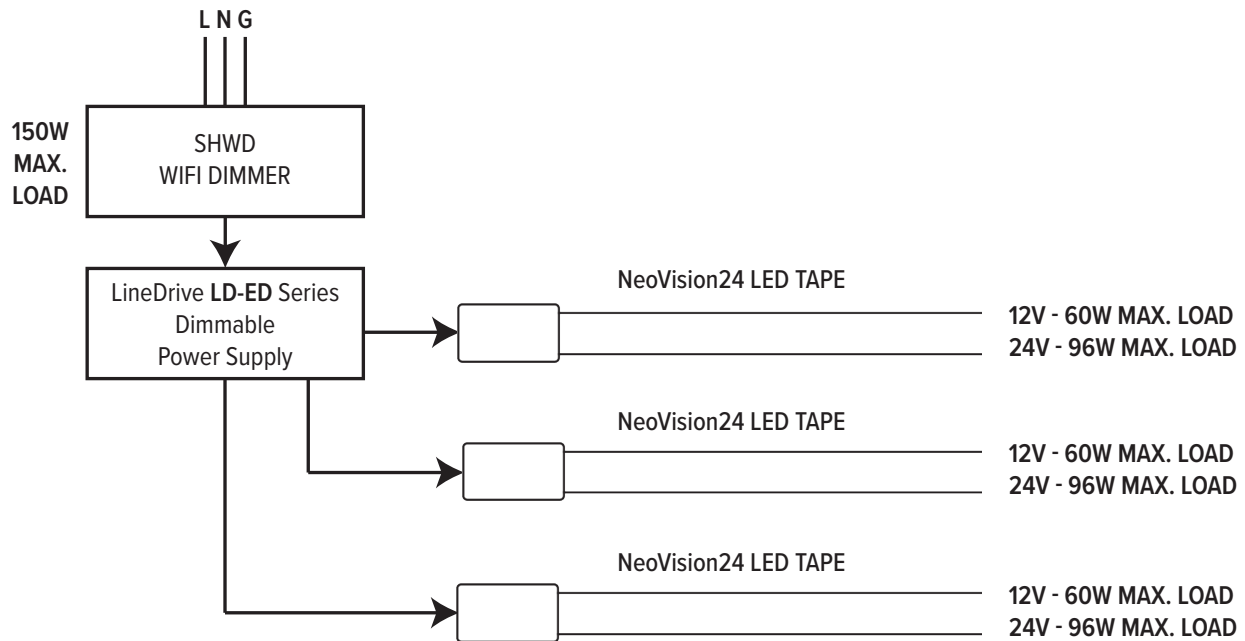

### SWITCHLD SWD DRIVER AND DIMMER

