

NeoVision120 TopFlex

120VAC Neon LED Tape Specification Sheet

GM Lighting®

Project Name

Type

Catalog #

Date

PRODUCT OVERVIEW

120VAC operation for higher power and brightness. Flexible linear “neon” tape is designed for applications that require ultra-rich light and color saturation that is characteristic of neon. TopFlex enables lighting along straight or inward/outward curved surfaces. NeoVision120 tapes provide long, continuous runs up to 163 feet.

FEATURES

- 120VAC operation (no driver required)
- Wet location - IP65
- Multiple power feed options:
 - End Feed
 - Bottom Feed
- Tape encased in UV resistant silicone
- Triac/ELV dimmable
- White and color LED options
- 120° viewing angle
- Maximum run: 163' - made to order in 12" increments

SPECIFICATIONS

ELECTRICAL

- Input: 120VAC 60Hz
- 3.4W per foot (colors)
- 4.3W per foot (white)
- PF>0.9

ENVIRONMENTAL

- Outdoor & wet location rated
- UV resistant
- Ambient operating temp:
 - 4°F to +113°F (-20°C to +45°C)

PHOTOMETRIC


- White: 2700K, 3000K or 4000K at 90+ CRI

WARRANTY

- 3 years

CERTIFICATION

- ETLus
- UL1598 (Hardwire)
- UL2388 (Plug-in)
- IP65

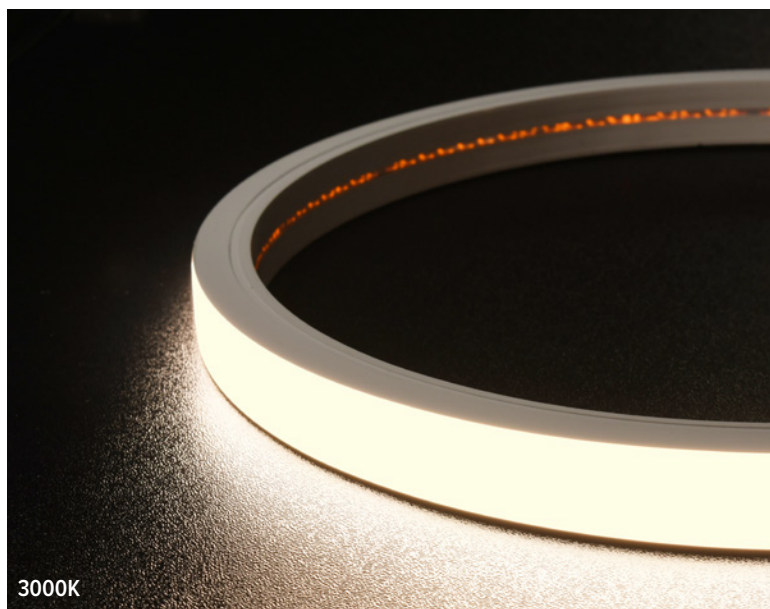

3000K



Amber



Blue



Green




Red

ORDERING INFORMATION

1. Select Tape
2. Pick Feed
3. Pick Mounting Options
4. Pick Control Options

All **NeoVision120** tape configurations must be specified at time of order. Parts are made to order and sealed by GM Lighting at the factory only.

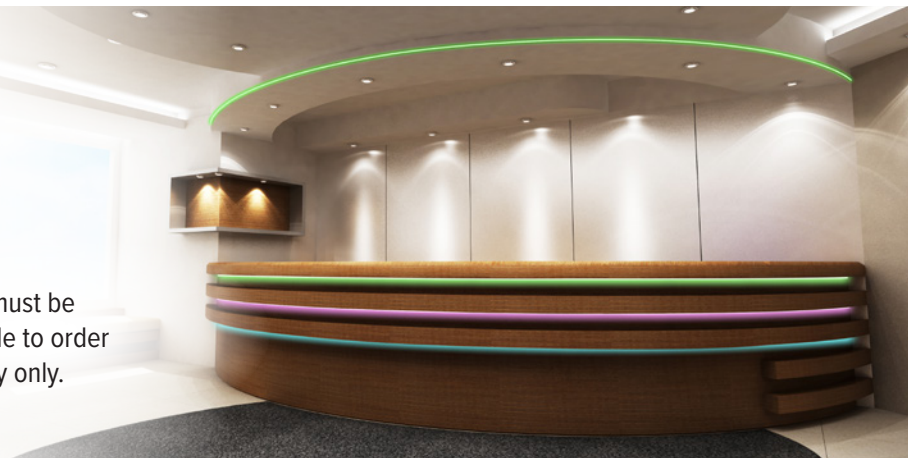

NeoVision120 TopFlex

120VAC Neon LED Tape Specification Sheet

GM Lighting®

All NeoVision 120 tape configurations will be cut and sealed by GM Lighting to your specifications. No field modifications allowed.

ORDERING INFORMATION

1. Select Tape

Example: NV120T-3W-30K-024 (24 ft)

XXX Length = 001 to 163 in 1 ft increments

Model	-	Watts/Ft	-	Color Temp	-	Length(ft)
NV120T		4W		27K (2700K)		XXX
				30K (3000K)		
				40K (4000K)		
NV120T		3W		AM (Amber)		XXX
				BL (Blue)		
				GR (Green)		
				RD (Red)		

Catalog No.	Watts/Ft Max.	Color Temp	Lumens/Ft	Max. Run
NV120T-4W-27K	4.3W	2700K	232 Lm	163 ft
NV120T-4W-30K	4.3W	3000K	255 Lm	163 ft
NV120T-4W-40K	4.3W	4000K	257 Lm	163 ft
NV120T-3W-AM	3.4W	Amber (593nm pk)	59 Lm	163 ft
NV120T-3W-BL	3.4W	Blue (465nm pk)	34 Lm	163 ft
NV120T-3W-GR	3.4W	Green (519nm pk)	194 Lm	163 ft
NV120T-3W-RD	3.4W	Red (633nm pk)	94 Lm	163 ft

ACCESSORIES


2. Pick Feed

Catalog No.	Description
NV120T-HW-8-EF	Hardwire End Feed w/Filter & 8A Fuse
NV120T-HW-8-BF	Hardwire Bottom Feed w/Filter & 8A Fuse
NV120T-PC-8-EF	Plug-in End Feed w/Filter & 8A Fuse
NV120T-PC-8-BF	Plug-in Bottom Feed w/Filter & 8A Fuse

3. Pick Mounting Options

Model	Description
NV120T-MC-FC	Front Clip, 20 Clips/40 Screws
NV120T-MC-A	Back Mounting Clip, 20 Clips/20 Screws
NV120T-CHL-A4	4 ft Channel with 4 Screws
NV120T-CHL-A6	6 ft Channel with 8 Screws
NV120T-FLEX-CHL-10	SideFlex 10 ft Channel with 22 Screws

All cords are 8ft long

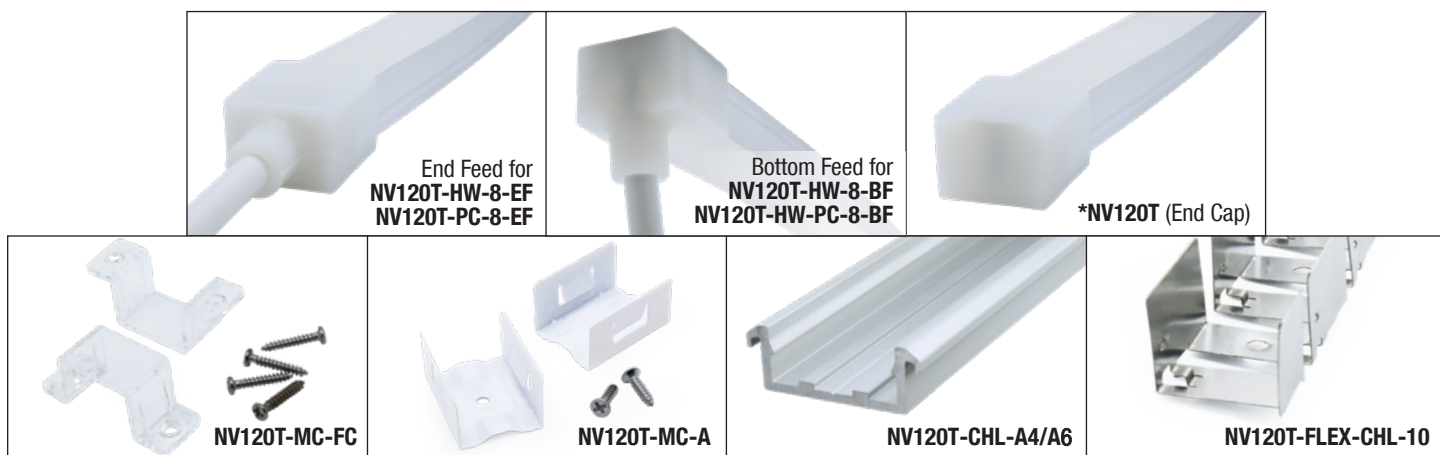

* Included with every tape section

NeoVision120 TopFlex

120VAC Neon LED Tape Specification Sheet

GM Lighting®

4. Pick Control Options

Lutron Dimmers	Family	Phase Dimming Operation	Trim Adjustments*	Smart Switch
Lutron PD-SNE	Casetta	Reverse Phase (ELV, use this setting only)	High & Low End Trim	Yes
Lutron DVELV	Diva	Reverse Phase (ELV)	-	-
Lutron DVRP	Diva	Reverse Phase (ELV)	-	-
Lutron MA-PRO	Maestro	Reverse Phase (ELV, recommended setting)	High & Low End Trim	-
Lutron RRD-PRO RadioRA2	Radio RA	Auto (recommended setting)	Low End Trim	Yes

Leviton Dimmers	Family	Phase Dimming Operation	Trim Adjustments*	Smart Switch
Leviton DSE06-10Z	Decora	Reverse Phase (ELV)	-	-
Leviton DDL06-1LZ	Decora	Forward Phase (TRIAC)	-	-

Legrand Dimmers	Family	Phase Dimming Operation	Trim Adjustments*	Smart Switch
Legrand RH703PTU	Radiant Harmony	Forward Phase (TRIAC, use this setting only)	High & Low End Trim	-

Notes: All dimmers operate at 120VAC, 60Hz
All dimmers will operate NV120 to below 20% dimming level.
Adjust trim levels for best performance.
See local electrical distributor for dimmers.






NeoVision120 TopFlex




120VAC Neon LED Tape Specification Sheet

GM Lighting®


End Feed for
NV120T-HW-8-EF
NV120T-PC-8-EF

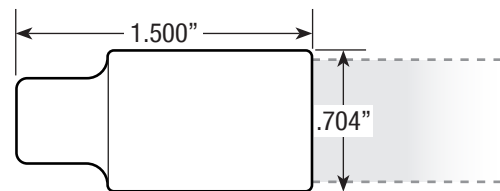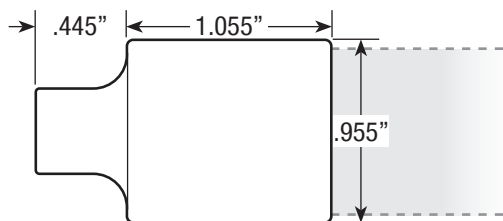


Bottom Feed for
NV120T-HW-8-BF
NV120T-PC-8-BF

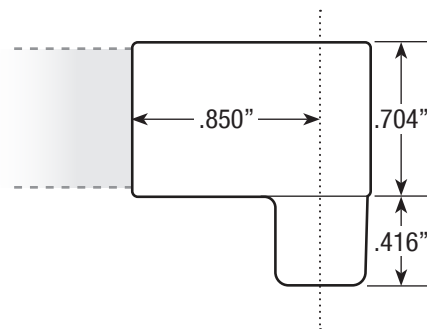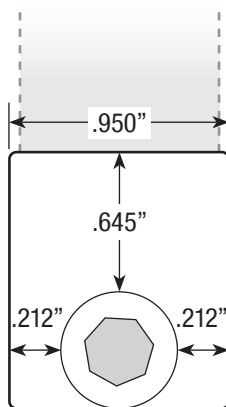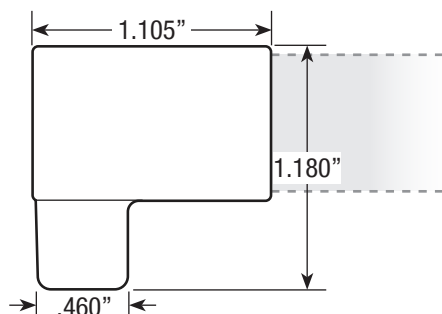


NV120T (End Cap)

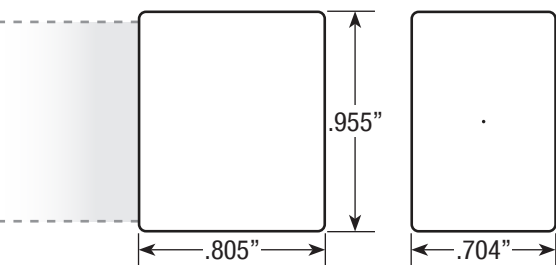


NV120T-MC-FC

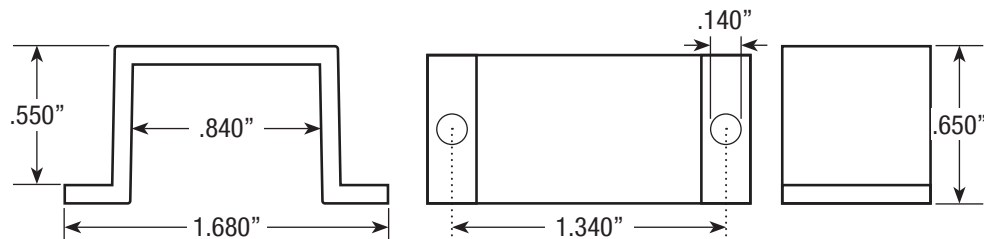


NV120T-MC-A

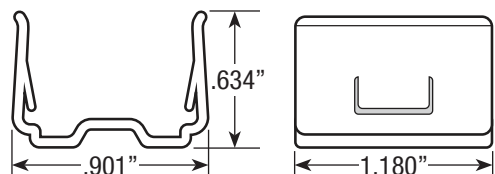

Rigid Channel
NV120T-CHL-A4/A8



Flexible Channel
NV120T-CHL-10

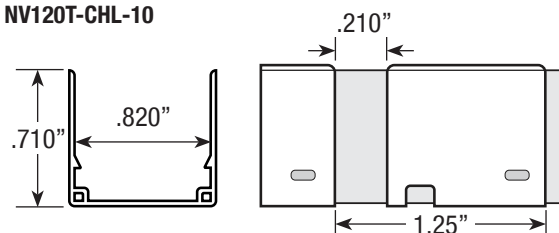


NeoVision120 TopFlex

120VAC Neon LED Tape Specification Sheet

GM Lighting®


DIMENSIONS

NV120T
Cross Section

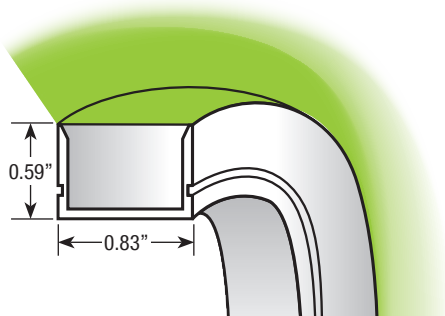


NV120T


Minimum Bending Diameter

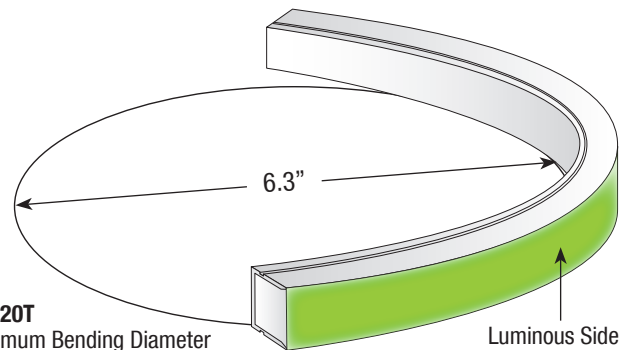


All parts pictured below are included with each hard wired option.

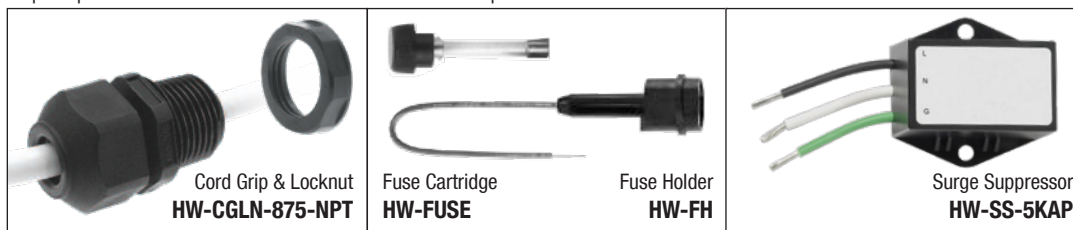


Cord Grip




Locknut






Fuse Cartridge




Fuse Holder

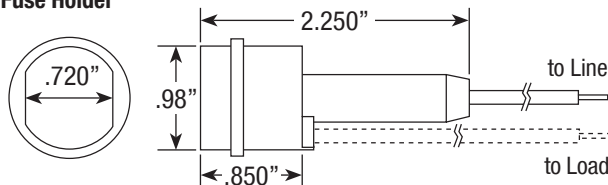

Surge Suppressor

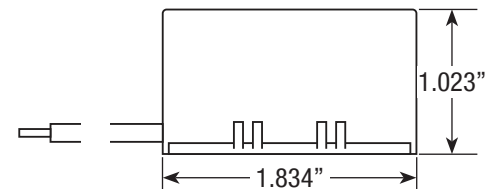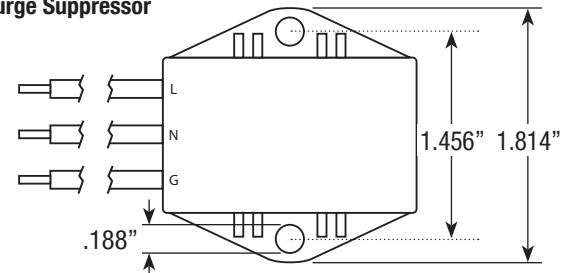

HARDWIRE ASSEMBLY

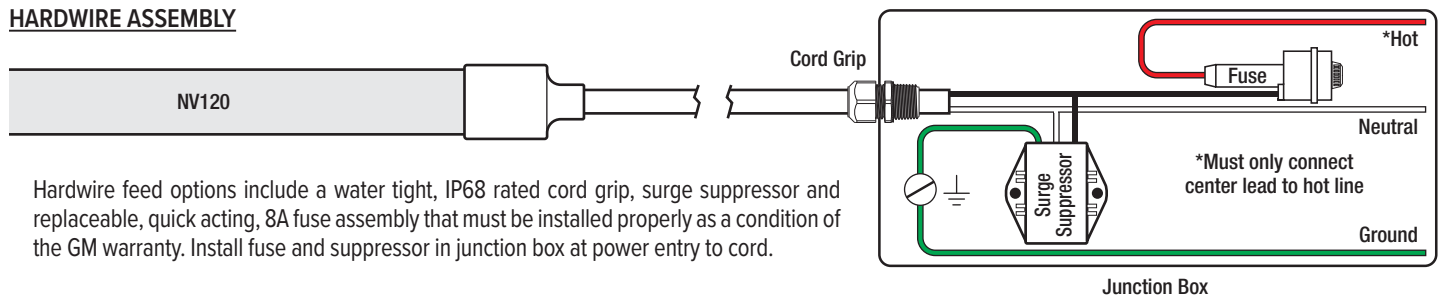

Hardwire feed options include a water tight, IP68 rated cord grip, surge suppressor and replaceable, quick acting, 8A fuse assembly that must be installed properly as a condition of the GM warranty. Install fuse and suppressor in junction box at power entry to cord.

GM Lighting®

©2024 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

NeoVision120_TopFlex_10.19.24
Page 5


NeoVision120 TopFlex

120VAC Neon LED Tape Specification Sheet


GM Lighting®

HARDWIRE FEEDS

NV120T-HW-8-EF (End Feed)

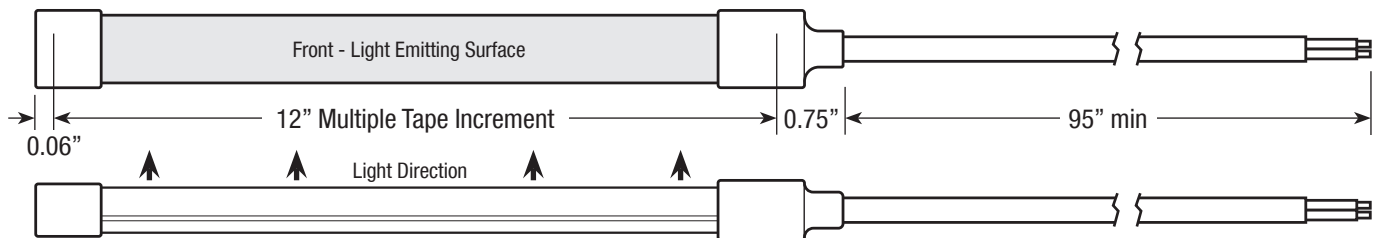


NV120T-HW-8-BF (Bottom Feed)

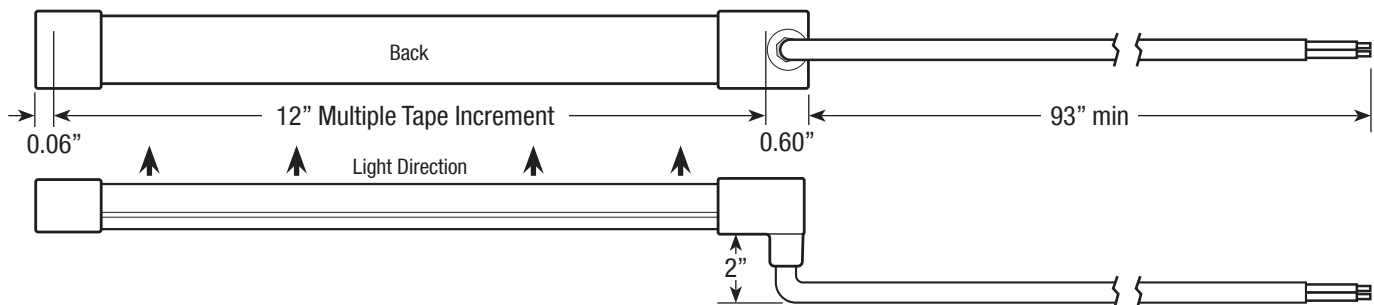

CORD AND PLUG FEEDS

Each cord and plug assembly comes with a replaceable, quick acting, 8A fuse and built-in surge suppressor.
When routing cord, 1.5" dia. minimum clearance required for surge suppressor and plug.

NV120T-PC-8-EF (End Feed)

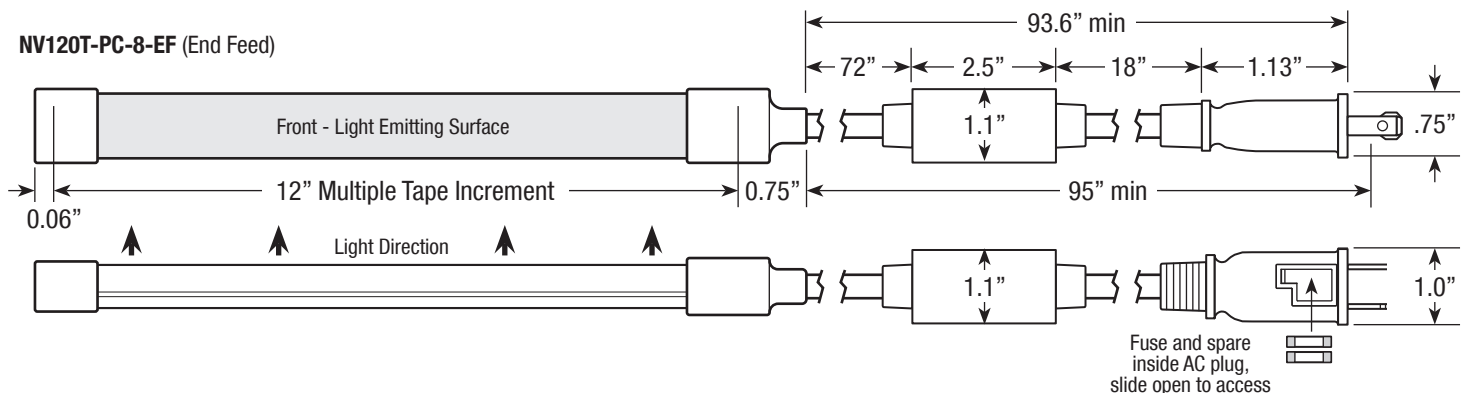

NV120T-PC-8-BF (Bottom Feed)

