


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 54.75 lm/W			
MODEL	NMT1312-Plus	I _{max} (cd)	178.3	S/MH(C0/180)	1.28
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	547.51	h UP,DN(C0-180)	2.2,47.6
NOMINAL FLUX(lm)	547.509	CIE CLASS	DIRECT	h UP,DN(C180-360)	2.3,47.9
LAMPS INSIDE	1	h up(%)	4.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	95.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

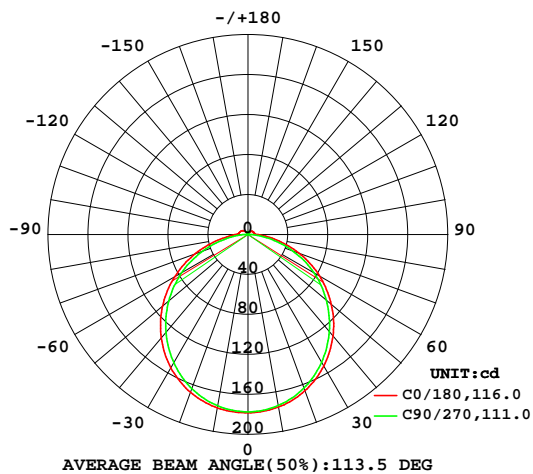

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

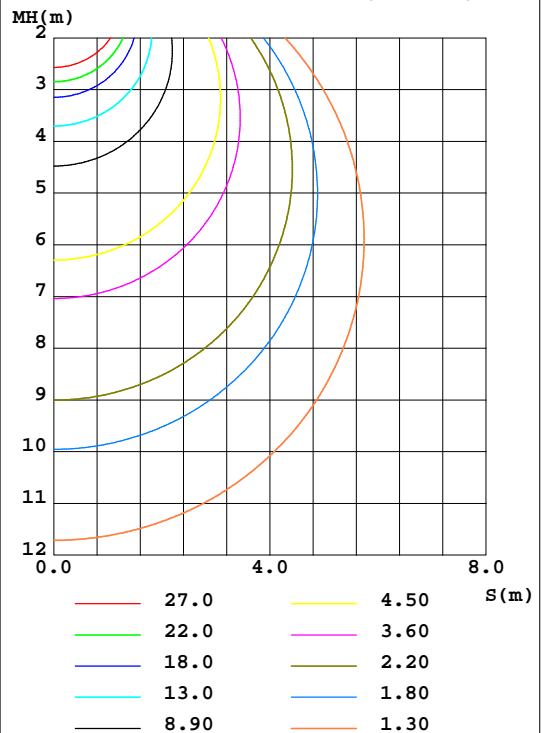

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:COLORS
 Test Date:2019-10-25

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	175.3	175.0	173.8	174.3	176.2	175.2	174.1	174.2	0- 10	16.83	16.83	3.07,3.07
20	166.4	165.9	163.6	165.2	168.1	166.2	164.2	165.0	10- 20	48.24	65.07	11.9,11.9
30	151.9	151.2	147.5	150.4	154.2	151.6	148.4	150.2	20- 30	73.19	138.3	25.3,25.3
40	132.5	131.4	126.8	130.5	135.1	131.9	127.8	130.5	30- 40	88.38	226.6	41.4,41.4
50	109.0	107.8	102.5	106.8	111.6	108.0	103.4	106.8	40- 50	92.03	318.7	58.2,58.2
60	82.50	81.25	76.18	80.14	84.75	80.85	76.79	80.21	50- 60	83.98	402.6	73.5,73.5
70	54.02	52.78	47.12	51.68	55.91	51.96	47.63	51.97	60- 70	65.42	468.1	85.5,85.5
80	26.67	25.20	19.14	23.87	28.45	24.63	19.84	24.21	70- 80	39.49	507.6	92.7,92.7
90	9.467	7.833	2.515	8.463	12.40	9.418	2.265	6.597	80- 90	15.35	522.9	95.5,95.5
100	6.781	5.531	0.8388	6.592	9.277	7.383	0.3207	4.542	90-100	6.427	529.3	96.7,96.7
110	6.367	4.981	0.8277	5.577	8.468	6.462	0.6751	3.672	100-110	5.191	534.5	97.6,97.6
120	5.947	3.821	1.249	4.355	7.499	5.244	1.010	3.273	110-120	4.271	538.8	98.4,98.4
130	5.291	3.399	1.556	1.881	6.296	2.730	1.323	2.614	120-130	3.339	542.1	99,99
140	4.349	2.017	1.783	1.884	2.666	1.797	1.584	1.690	130-140	2.096	544.2	99.4,99.4
150	2.505	2.138	1.997	2.131	2.011	2.077	1.850	1.850	140-150	1.306	545.5	99.6,99.6
160	2.712	2.278	2.410	2.405	2.225	2.384	2.272	2.097	150-160	1.017	546.5	99.8,99.8
170	2.692	2.659	2.752	2.645	2.351	2.645	2.725	2.651	160-170	0.7051	547.2	100,100
180	2.538	2.966	3.032	2.979	2.552	2.966	3.059	2.986	170-180	0.2592	547.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

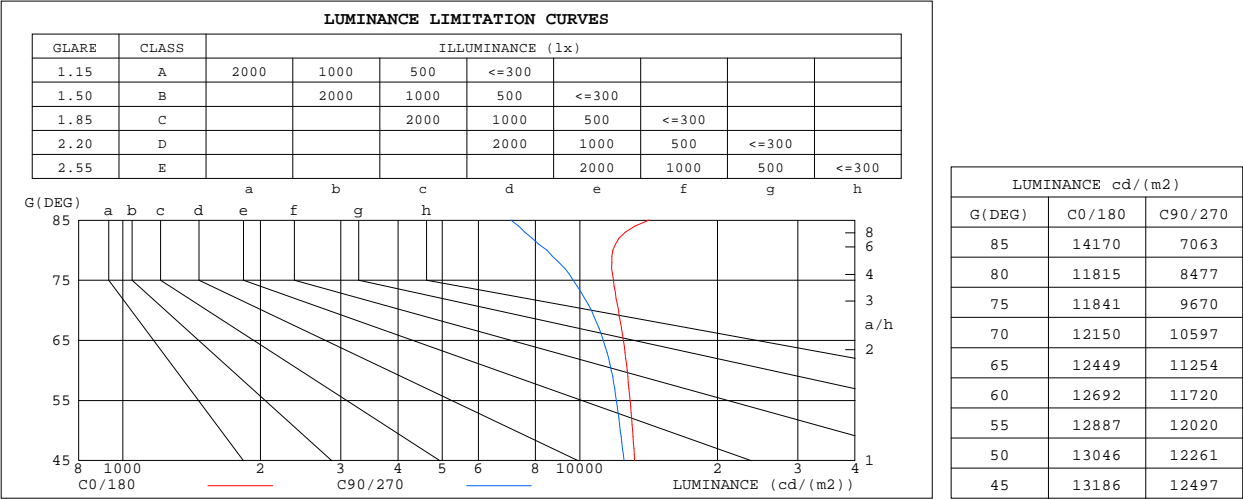


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.98	.94	.99	.95	.92	.94	.91	.88	.90	.87	.85	.85	.83	.81	.79
2.0	.89	.82	.76	.86	.80	.75	.82	.77	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.78	.69	.63	.76	.68	.62	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.61	.55	.50	.58	.53	.49	.47
5.0	.61	.52	.46	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.40	.54	.45	.39	.52	.44	.39	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.45	.38	.34	.43	.37	.33	.31
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.30	.41	.35	.30	.40	.34	.29	.28
9.0	.42	.34	.28	.41	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.31	.25	.38	.30	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22

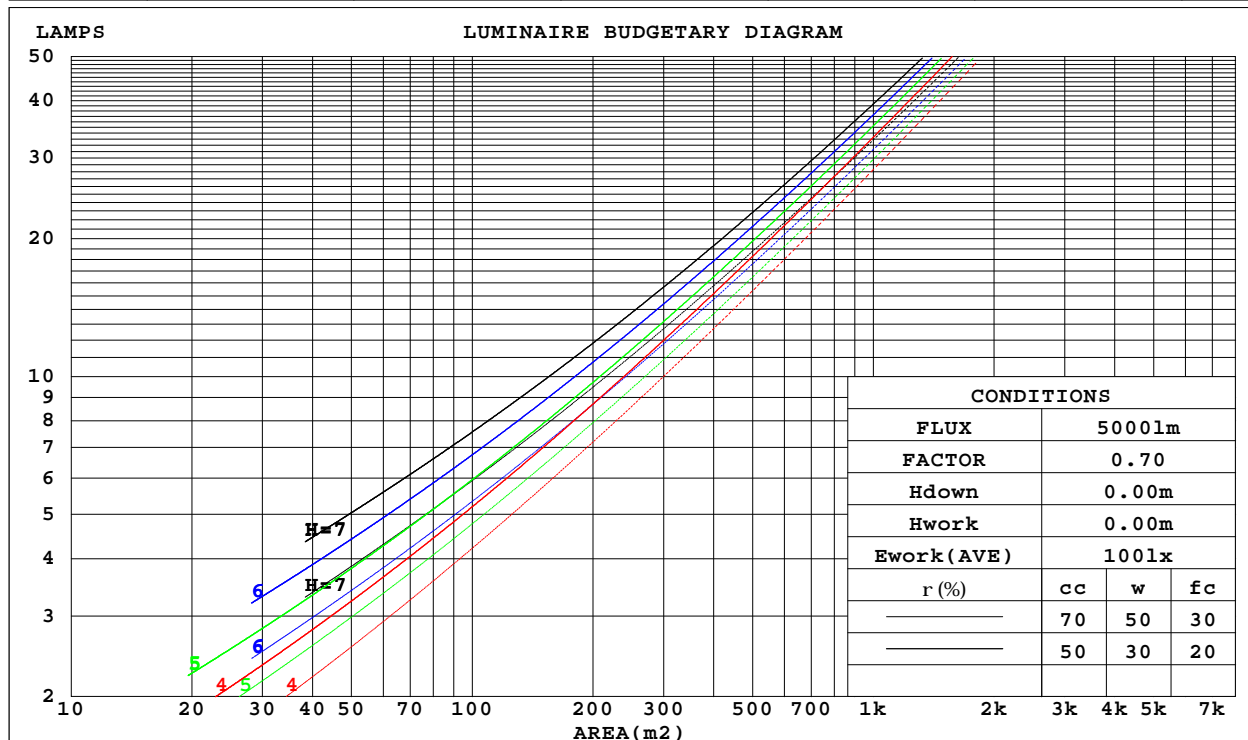

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:COLORS
 Test Date:2019-10-25

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.321	.183	.058	.313	.178	.057	.297	.170	.054	.282	.163	.052	.269	.156	.050	
2.0	.297	.163	.050	.290	.160	.049	.276	.153	.048	.263	.147	.046	.251	.142	.045	
3.0	.273	.145	.044	.267	.143	.043	.254	.138	.042	.242	.133	.041	.231	.128	.040	
4.0	.251	.131	.038	.245	.128	.038	.234	.124	.037	.223	.120	.036	.214	.116	.035	
5.0	.232	.118	.034	.226	.116	.034	.216	.113	.033	.207	.109	.032	.198	.106	.032	
6.0	.214	.107	.031	.210	.106	.030	.200	.103	.030	.192	.100	.029	.184	.097	.029	
7.0	.199	.098	.028	.195	.097	.028	.187	.094	.027	.179	.092	.027	.172	.089	.026	
8.0	.186	.091	.026	.182	.090	.025	.175	.087	.025	.168	.085	.024	.161	.083	.024	
9.0	.174	.084	.023	.170	.083	.023	.164	.081	.023	.157	.079	.023	.151	.077	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.076	.021	.148	.074	.021	.143	.072	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.225	.225	.225	.192	.192	.192	.131	.131	.131	.075	.075	.075	.024	.024	.024	
1.0	.216	.191	.168	.184	.164	.145	.126	.113	.100	.073	.065	.058	.023	.021	.019	
2.0	.208	.167	.132	.178	.143	.114	.122	.099	.080	.070	.058	.047	.023	.019	.015	
3.0	.200	.149	.109	.172	.129	.094	.118	.089	.066	.068	.052	.039	.022	.017	.013	
4.0	.192	.136	.093	.165	.118	.081	.114	.082	.057	.066	.048	.034	.021	.016	.011	
5.0	.185	.126	.082	.159	.109	.072	.109	.076	.051	.063	.045	.030	.020	.015	.010	
6.0	.178	.118	.074	.153	.102	.065	.105	.071	.046	.061	.042	.027	.020	.014	.009	
7.0	.171	.111	.069	.147	.096	.060	.102	.067	.042	.059	.040	.025	.019	.013	.008	
8.0	.164	.105	.064	.142	.091	.056	.098	.064	.040	.057	.038	.024	.018	.012	.008	
9.0	.158	.100	.061	.136	.087	.053	.095	.061	.038	.055	.036	.022	.018	.012	.007	
10.0	.153	.096	.058	.132	.083	.051	.091	.059	.036	.053	.035	.021	.017	.011	.007	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm										
NAME: NMT1312-Plus					TYPE:			WEIGHT:		
SPEC.:NMT1312-9WW24NSN050CC0100-Plus					DIM.: 1000*13*12			SERIAL No.:		
MFR.: COLORS					SUR.:1000*13			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.6	25.1	24.0	25.4	25.7	23.3	24.8	23.7	25.1	25.4
	25.3	26.6	25.6	26.9	27.3	24.8	26.2	25.2	26.5	26.8
	26.0	27.3	26.4	27.6	28.0	25.4	26.7	25.8	27.0	27.4
	26.6	27.8	27.0	28.1	28.5	25.8	27.0	26.2	27.4	27.8
	26.8	28.0	27.2	28.3	28.7	25.9	27.1	26.3	27.5	27.9
	27.0	28.1	27.4	28.5	28.9	26.0	27.1	26.4	27.5	27.9
4H	24.2	25.5	24.6	25.9	26.2	24.0	25.3	24.4	25.6	26.0
	26.1	27.2	26.5	27.6	28.0	25.7	26.8	26.1	27.2	27.6
	26.9	27.9	27.3	28.3	28.8	26.4	27.5	26.9	27.9	28.3
	27.6	28.5	28.1	29.0	29.4	27.0	27.9	27.4	28.3	28.8
	27.9	28.8	28.4	29.2	29.7	27.1	28.0	27.6	28.4	28.9
	28.2	29.0	28.7	29.5	30.0	27.2	28.0	27.7	28.5	29.0
8H	27.2	28.0	27.7	28.5	29.0	26.8	27.6	27.2	28.1	28.5
	28.1	28.8	28.6	29.3	29.8	27.5	28.2	28.0	28.7	29.2
	28.5	29.1	29.0	29.6	30.2	27.7	28.4	28.3	28.9	29.4
	28.9	29.5	29.5	30.0	30.6	27.9	28.5	28.5	29.0	29.6
12H	27.2	28.0	27.7	28.4	28.9	26.8	27.6	27.3	28.0	28.5
	28.1	28.8	28.7	29.3	29.8	27.6	28.2	28.1	28.7	29.3
	28.6	29.2	29.2	29.7	30.3	27.9	28.4	28.4	29.0	29.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 547.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	44	37	55	43	37	53	43	36	30
0.80	65	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	54	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	68	80	72	66	58
2.00	93	84	77	91	82	76	86	80	74	65
2.50	97	88	82	94	87	81	90	84	79	69
3.00	100	93	87	98	91	86	93	87	83	73
4.00	104	98	93	102	96	91	97	92	88	78
5.00	107	102	97	104	99	95	99	95	92	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

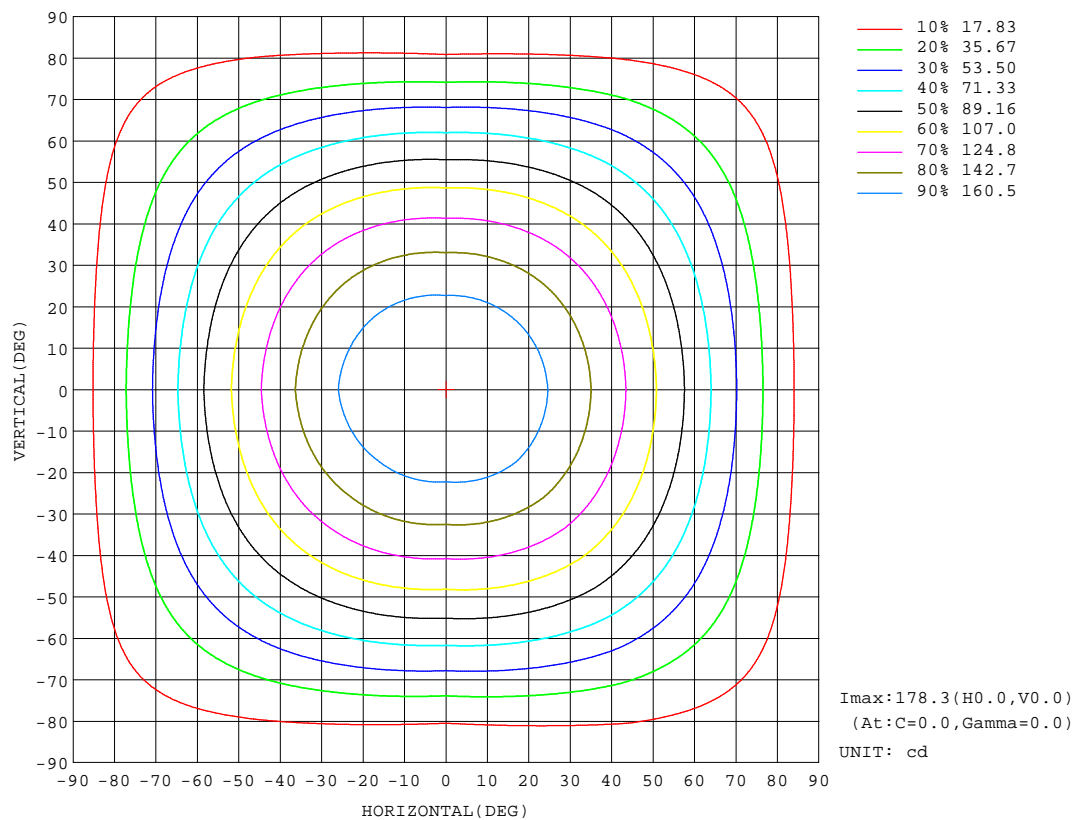


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

Flux out:370.7 lm

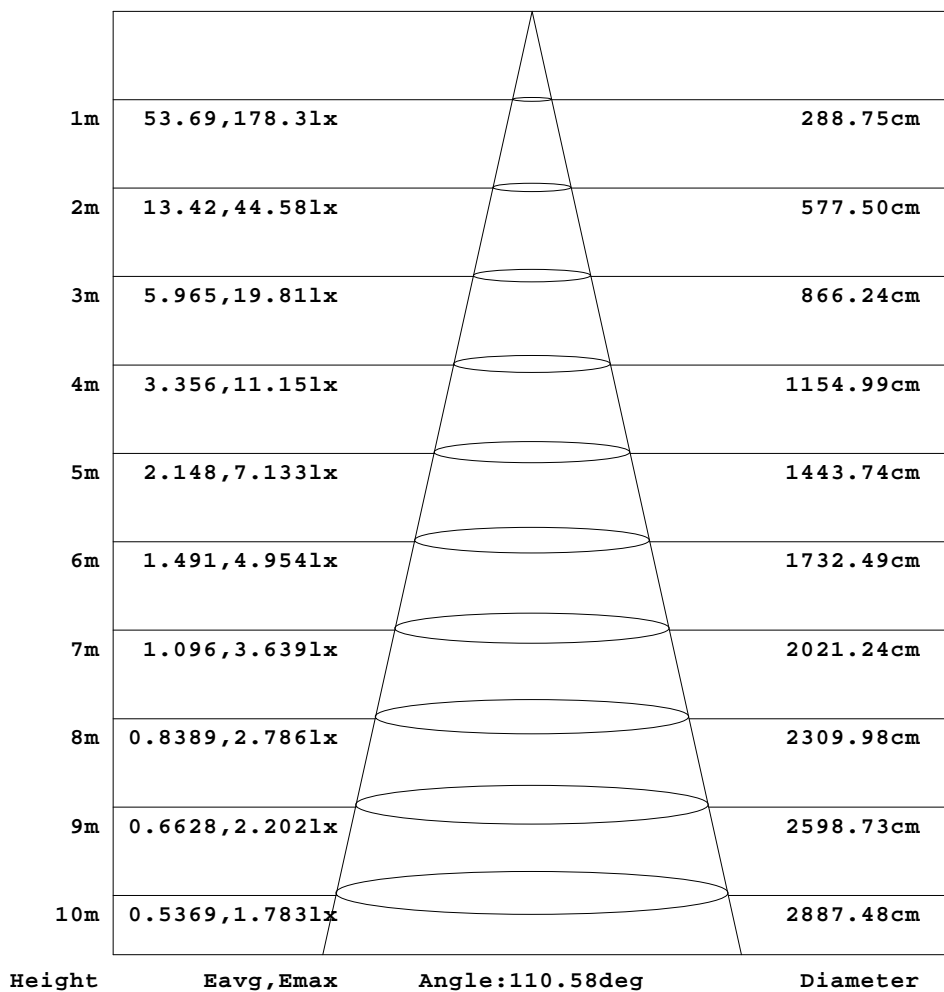


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

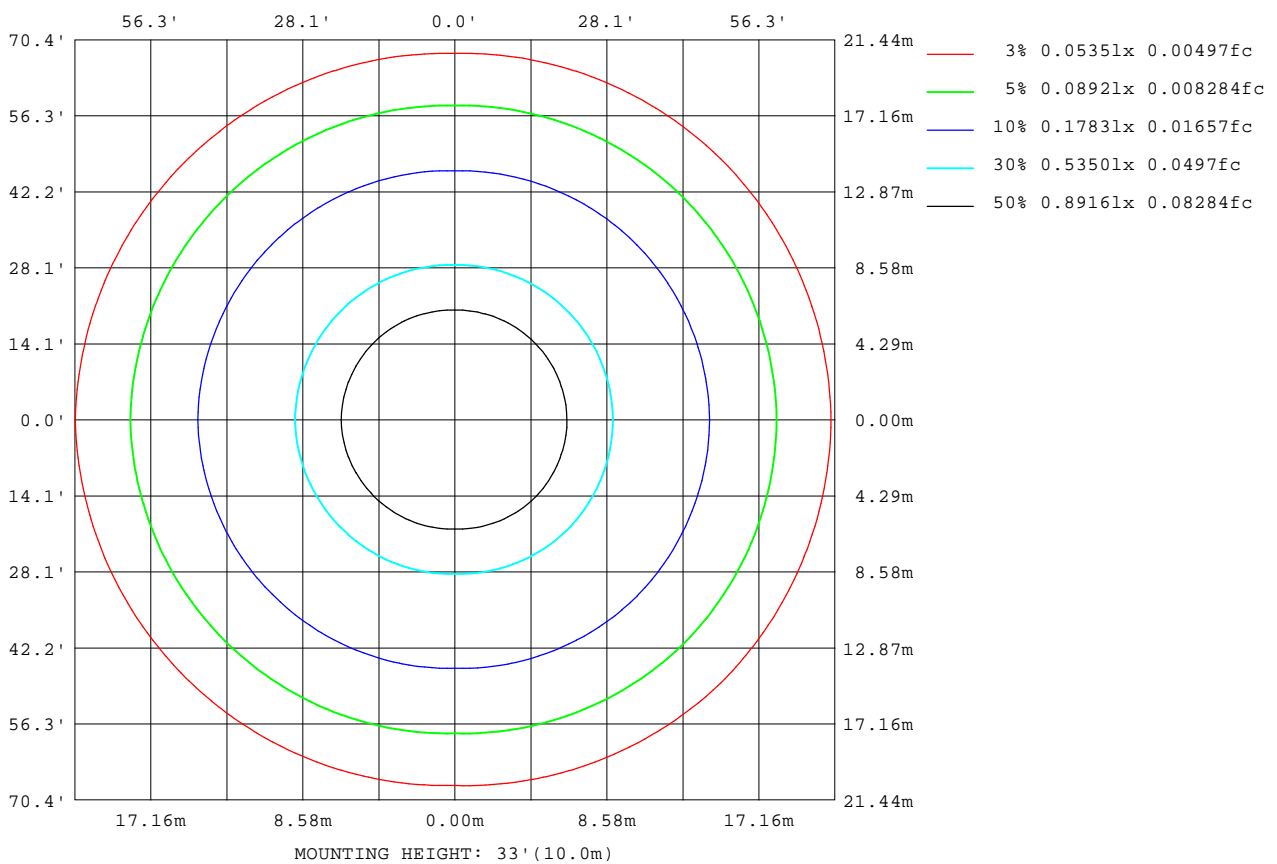

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:COLORS
 Test Date:2019-10-25

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	12637
L_0~180(75)av	12103
L_0~180(85)av	15093
L_90~270(65)av	11303
L_90~270(75)av	9746
L_90~270(85)av	7379
L_45(65)av	12104
L_45(75)av	11216
L_45(85)av	12248

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

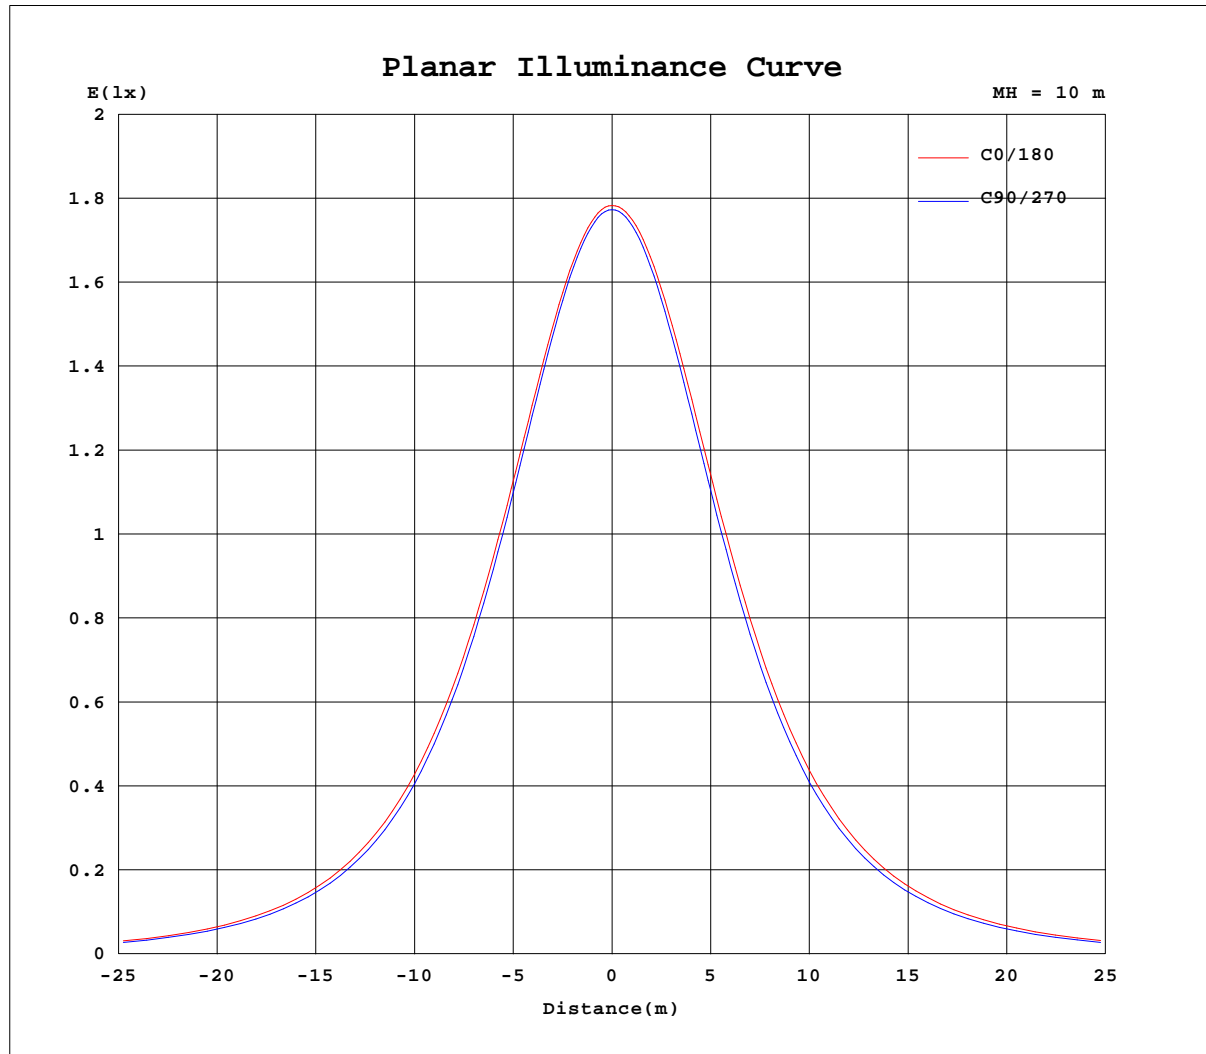

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: COLORS
Test Date: 2019-10-25

deg Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4170A P:10.00W PF:1.000 Freq:0Hz Lamp Flux:547.509x1 lm		
NAME: NMT1312-Plus	TYPE:	WEIGHT:
SPEC.:NMT1312-9WW24NSN050CC0100-Plus	DIM.: 1000*13*12	SERIAL No.:
MFR.: COLORS	SUR.:1000*13	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	178	178	177	177	178	178	177	177										
5	178	177	176	177	178	177	177	176										
10	175	175	174	174	176	175	174	174										
15	172	171	170	170	173	171	170	170										
20	166	166	164	165	168	166	164	165										
25	160	159	156	158	162	160	157	158										
30	152	151	148	150	154	152	148	150										
35	143	142	138	141	145	142	139	141										
40	132	131	127	131	135	132	128	130										
45	121	120	115	119	124	120	116	119										
50	109	108	102	107	112	108	103	107										
55	96.1	94.8	89.6	93.7	98.6	94.7	90.3	93.8										
60	82.5	81.2	76.2	80.1	84.8	80.8	76.8	80.2										
65	68.4	67.1	61.8	66.1	70.5	66.5	62.4	66.2										
70	54.0	52.8	47.1	51.7	55.9	52.0	47.6	52.0										
75	39.8	38.5	32.5	37.2	41.6	37.6	33.0	37.6										
80	26.7	25.2	19.1	23.9	28.5	24.6	19.8	24.2										
85	16.1	14.3	8.00	13.6	18.1	14.6	8.72	13.0										
90	9.47	7.83	2.52	8.46	12.4	9.42	2.26	6.60										
95	7.17	5.78	2.01	7.01	9.95	7.84	1.13	4.92										
100	6.78	5.53	0.84	6.59	9.28	7.38	0.32	4.54										
105	6.57	5.37	0.63	6.10	8.87	6.99	0.47	4.32										
110	6.37	4.98	0.83	5.58	8.47	6.46	0.68	3.67										
115	6.17	4.25	1.06	4.77	8.01	5.80	0.85	3.29										
120	5.95	3.82	1.25	4.36	7.50	5.24	1.01	3.27										
125	5.61	3.69	1.39	3.64	6.93	4.85	1.18	3.02										
130	5.29	3.40	1.56	1.88	6.30	2.73	1.32	2.61										
135	4.92	2.82	1.68	1.78	5.49	1.83	1.46	1.76										
140	4.35	2.02	1.78	1.88	2.67	1.80	1.58	1.69										
145	3.01	2.08	1.90	1.99	1.98	1.90	1.69	1.78										
150	2.50	2.14	2.00	2.13	2.01	2.08	1.85	1.85										
155	2.64	2.19	2.20	2.26	2.10	2.20	2.06	1.94										
160	2.71	2.28	2.41	2.40	2.22	2.38	2.27	2.10										
165	2.75	2.45	2.59	2.52	2.35	2.50	2.51	2.39										
170	2.69	2.66	2.75	2.65	2.35	2.64	2.73	2.65										
175	2.55	2.87	2.93	2.82	2.36	2.75	2.92	2.85										
180	2.54	2.97	3.03	2.98	2.55	2.97	3.06	2.99										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:COLORS
Test Date:2019-10-25

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: